

DO-35 Case


Type	V _R	5%	Maximum Leakage Current	Test Current	Maximum Dynamic Impedance	Typical Temperature Coefficient	Dissipation
	V	±V					
	V	±V	μA	mA	Ω	%/°C	mW
1N816	.704	.035	10	1000	—	—	—
1N3896	.775	.039		50	2.5	.020	—
1N3897	1.500	.075		30	5.0	.022	—
1N3898	2.000	.100		20	10.0	.023	—
1N4829	1.900	.095		100	—	—	—
1N4830	2.700	.135	10	100	—	—	—
BZ102/0V7	.700	.035		5	10	.023	—
BZ102/1V4	1.400	.070		5	20	.023	—
BZ102/2V1	2.100	.105		5	30	.023	—
BZ102/2V8	2.800	.140		5	40	.023	—
BZ102/3V4	3.450	.173	10	5	50	.023	—
BZX75C1V4	1.400	.070		10	10	.033	—
BZX75C2V1	2.100	.105		10	15	.050	—
BZX75C2V8	2.800	.140		10	20	.066	—
BZX75C3V6	3.600	.180		10	25	.082	—
G129	.560	.028	10	1	—	—	—
G130	.640	.032		1	—	—	—
ST22	.640	.032		60	—	.031	—
ST23	.600	.030		45	—	.033	—
ST37	.830	.042		100	15	—	—
ST38	1.650	.083	10	100	30	—	—
ST39	2.500	.125		100	45	—	—
ST41	3.300	.165		100	6	—	—
STB-1	.650	.033		10	—	—	—
STB-2	1.300	.065		10	—	—	—
STB-4	2.600	.130	10	10	—	—	—
STB-7	4.550	.228		10	—	—	—
STB-12	7.800	.390		10	—	—	—
STB-567	1.460	.146		10	—	—	—
STB-568	2.200	.110		10	—	—	—
STB-569	2.870	.144	10	10	—	—	

* 10%

Stabistors are diffused silicon diodes with controlled forward voltage characteristics. They are offered with reference voltages from 0.560V to 7.800V in DO-35 packages.

All stabistor diodes are manufactured in double plug packages with silicon dice fused to the ends of the plug. This technique results in diodes with stable forward reference characteristics.

Applications may be found in a broad range of circuits where stable forward reference sources are required, such as voltage regulation, sensing, comparing, protecting and in computer circuitry.

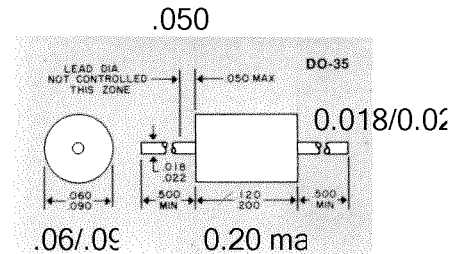

DO-35 Case

Type	Voltage Range	Maximum Leakage Current	Test Current	Maximum Dynamic Impedance	Typical Temperature Coefficient	Dissipation
	V _R					
	V	μA	mA	Ω	%/°C	mW
AP200	1.220-1.340	10*	1	—	—	—
	1.390-1.540		10	—	—	—
	1.600-1.760		100	—	—	—
AP300	1.840-2.030	10*	1	—	—	—
	2.100-2.330		10	—	—	—
	2.400-2.650		100	—	—	—
AP400	2.470-2.710	10*	1	—	—	—
	2.800-3.070		10	—	—	—
	3.160-3.490		100	—	—	—
1N4156	1.210-1.410	10‡	1	—	—	—
	1.380-1.580		10	—	—	—
	1.540-1.840		100	—	—	—
1N4157	1.850-2.050	10‡	1	—	—	—
	2.120-2.320		10	—	—	—
	2.360-2.660		100	—	—	—
1N5179	2.100-2.800	10‡	1	—	—	—
	2.600-3.100		10	—	—	—
	3.000-3.700		100	—	—	—

* @ 30V
‡ @ 20V

all dimensions in inches

DO-35