

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/04/11	

6

5

4





3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

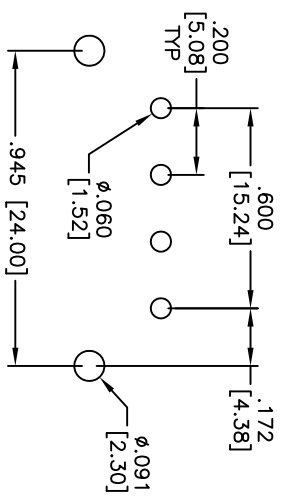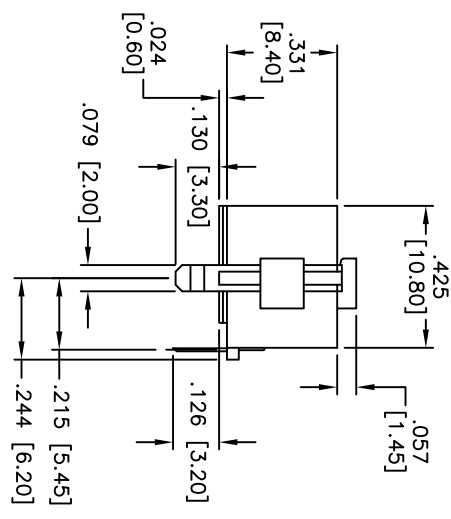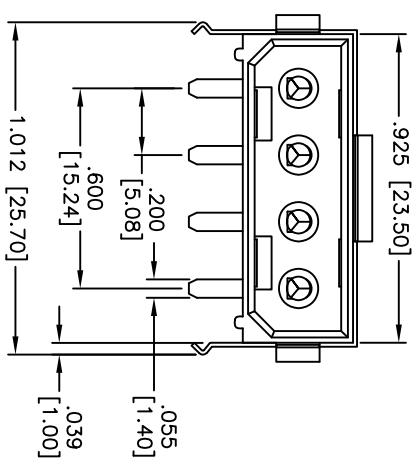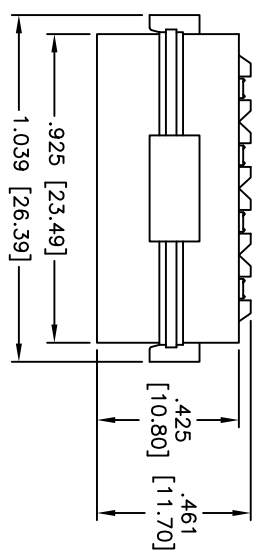

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:
 Insulator: Thermoplastic, Reinforced, rated UL 94V-2
 Insulator color: Transparency
 Contacts: Brass
 Shell: Brass, Nickel plated
Plating:
 Tin over nickel underplate

Electrical:
 Operation voltage: 250V AC
 Current rating: 6.5A
 Contact resistance: 10 mohms max
 Insulation resistance: 500 mohms min.
 Dielectric withstanding voltage: 1500 VAC for 1 minute
Temperature rating:
 Operating temperature: -40°C to +105°C

Environmental:
 Lead Free, RoHS compliant
 Recommended soldering temperature: 235°C for 5 seconds

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

.200 [5.08] RIGHT ANGLE HEADER

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLLS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	7/04/11
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	DDR-04-NH-BL	-
REF: S00723T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1

