


C1608CH2A471J080AA



**TDK item description** C1608CH2A471JT\*\*\*\*

|                     |                           |
|---------------------|---------------------------|
| <b>Applications</b> | Commercial Grade          |
| <b>Feature</b>      | Mid Voltage (100 to 630V) |
| <b>Series</b>       | C1608 [EIA 0603]          |
| <b>Status</b>       | Production                |



Dimensions in mm

| Size                          |                                    |
|-------------------------------|------------------------------------|
| Length(L)                     | 1.60mm ±0.10mm                     |
| Width(W)                      | 0.80mm ±0.10mm                     |
| Thickness(T)                  | 0.80mm ±0.10mm                     |
| Terminal Width(B)             | 0.20mm Min.                        |
| Terminal Spacing(G)           | 0.30mm Min.                        |
| Recommended Land Pattern (PA) | 0.70mm to 1.00mm(Flow Soldering)   |
|                               | 0.60mm to 0.80mm(Reflow Soldering) |
| Recommended Land Pattern (PB) | 0.80mm to 1.00mm(Flow Soldering)   |
|                               | 0.60mm to 0.80mm(Reflow Soldering) |
| Recommended Land Pattern (PC) | 0.60mm to 0.80mm(Flow Soldering)   |
|                               | 0.60mm to 0.80mm(Reflow Soldering) |

| Electrical Characteristics   |                |
|------------------------------|----------------|
| Capacitance                  | 470pF ±5%      |
| Rated Voltage                | 100VDC         |
| Temperature Characteristic   | CH(0±60ppm/°C) |
| Q (Min.)                     | 1000           |
| Insulation Resistance (Min.) | 10000MΩ        |






| Other            |                                    |
|------------------|------------------------------------|
| Soldering Method | Wave (Flow)                        |
|                  | Reflow                             |
| AEC-Q200         | No                                 |
| Packing          | Punched (Paper)Taping [180mm Reel] |
| Package Quantity | 4000pcs                            |

! Images are for reference only and show exemplary products.  
! This PDF document was created based on the data listed on the TDK Corporation website.  
! All specifications are subject to change without notice.

C1608CH2A471J080AA



Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

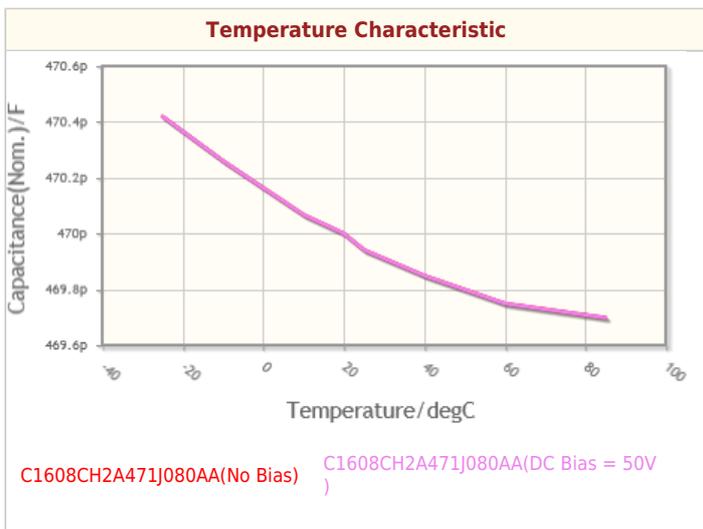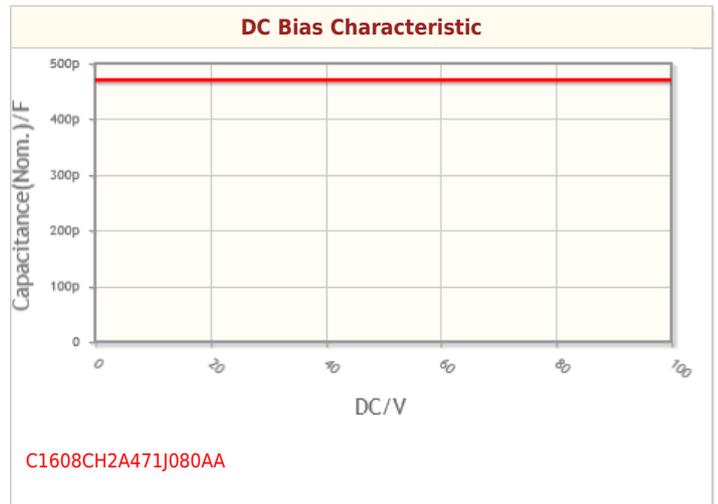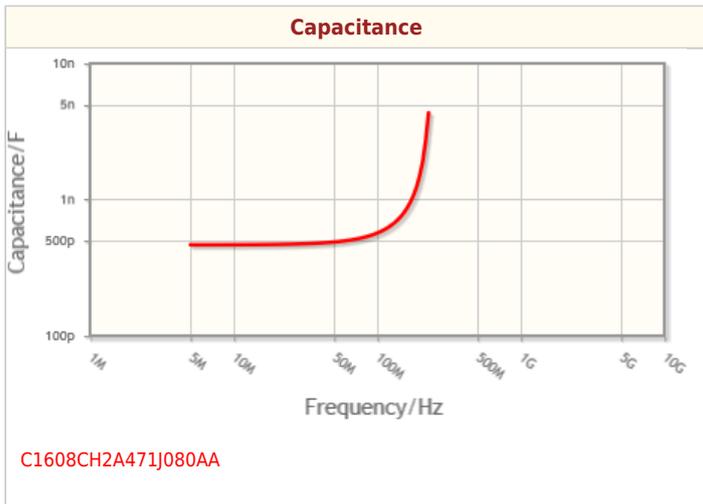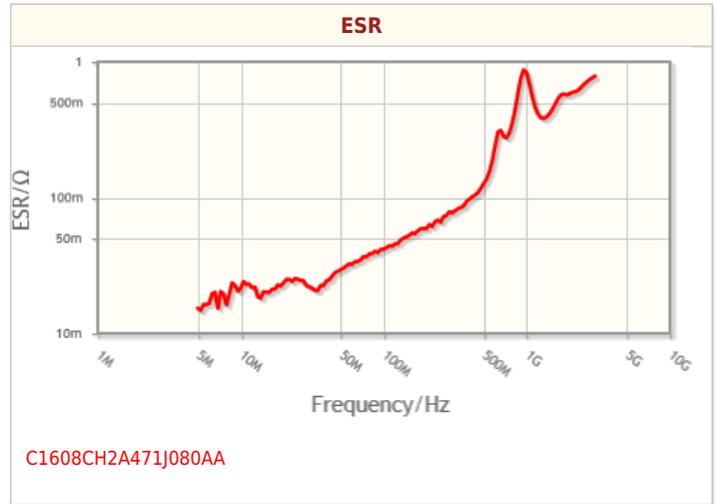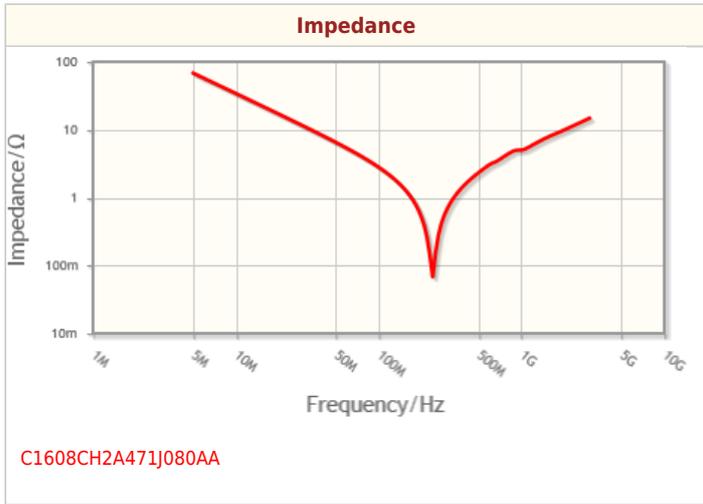


! Images are for reference only and show exemplary products.  
! This PDF document was created based on the data listed on the TDK Corporation website.  
! All specifications are subject to change without notice.

C1608CH2A471J080AA



## Associated Images

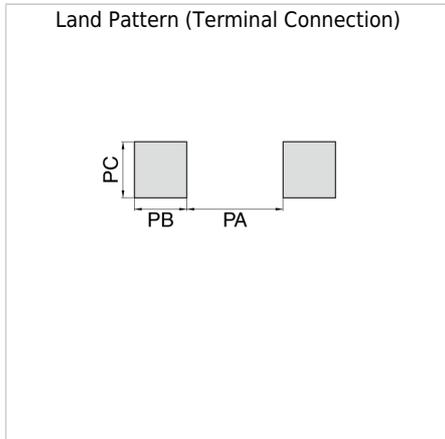

! Images are for reference only and show exemplary products.  
! This PDF document was created based on the data listed on the TDK Corporation website.  
! All specifications are subject to change without notice.