



# P6SMBJ-AU SERIES

## SURFACE MOUNT TRANSIENT VOLTAGE SUPPRESSOR POWER 600 Watt

**STAND-OFF VOLTAGE**

**5 to 220 Volt**

**SMB / DO-214AA**

Unit : inch(mm)



**Recongnized File # E210467**

### FEATURES

- For surface mounted applications in order to optimize board space.
- Glass passivated junction
- Low inductance
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- High temperature soldering : 260°C /10 seconds at terminals
- Acquire quality system certificate : TS16949
- AEC-Q101 qualified
- ESD IEC-61000-4-2 Air  $\pm$  30kV, Contact  $\pm$  30kV
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Green molding compound as per IEC61249 Std. . (Halogen Free)

### MECHANICAL DATA

- Case: JEDEC DO-214AA, Molded plastic over passivated junction.
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Standard Packaging: 12mm tape (EIA-481)
- Weight: 0.003 ounce, 0.092 gram

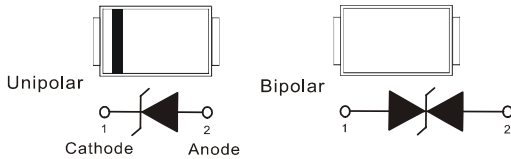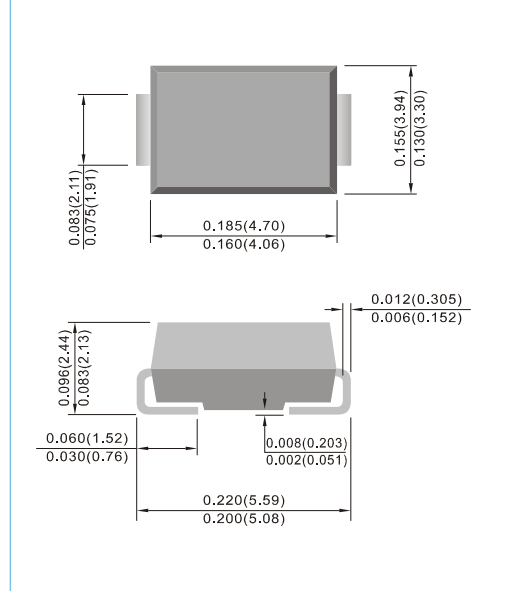

### DEVICES FOR BIPOLAR APPLICATIONS

For Bidirectional use C or CA Suffix for types P6SMBJ5.0 thru types P6SMBJ220.  
Electrical characteristics apply in both directions.

### MAXIMUM RATINGS AND CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified. Resistive or inductive load, 60Hz.  
For Capacitive load derate current by 20%.

Rating	Symbol	Value	Units
Peak Pulse Power Dissipation on $t_p=10/1000\mu s$ waveform (Notes 1,2, Fig.1)	$P_{PP}$	600	Watts
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (Notes 2,3)	$I_{FSM}$	100	Amps
Peak Pulse Current on $t_p=10/1000\mu s$ waveform (Notes 1) Fig.3	$I_{PPM}$	see Table 1	Amps
Typical Thermal Resistance Junction to Air (Notes 2)	$R_{\theta JA}$	60	$^{\circ}C / W$
ESD IEC-61000-4-2 (Air) ESD IEC-61000-4-2 (Contact)	$V_{ESD}$	$\pm 30$ $\pm 30$	kV
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150	$^{\circ}C$

#### NOTES:

1. Non-repetitive current pulse, per Fig.3 and derated above  $T_A = 25^{\circ}C$  per Fig. 2.
2. Mounted on  $5mm^2$  (0.13mm thick) land areas.
3. Measured on 8.3ms, single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum.
4. A transient suppressor is selected according to the working peak reverse voltage ( $V_{RWM}$ ), which should be equal to or greater than the DC or continuous peak operating voltage level.



# P6SMBJ-AU SERIES

Part Number		Reverse Stand-off Voltage	Breakdown Voltage		Test Current	Reverse Leakage		Max. Clamp Voltage 10/1000µs	Peak Pulse Current 10/1000µs	Marking Code	
			$V_{BR} @ I_T$			$I_R @ V_{RWM}$					
			Min.	Max.		UNI	BI				
UNI	BI	V	V	V	mA	µA	µA	V	A	UNI	BI
<b>600W Transient Voltage Suppressor</b>											
P6SMBJ5.0-AU	P6SMBJ5.0C-AU	5	6.4	7.55	10	800	1600	9.6	62.5	KD	AD
P6SMBJ5.0A-AU	P6SMBJ5.0CA-AU	5	6.4	7.25	10	800	1600	9.2	65.2	KE	AE
P6SMBJ6.0-AU	P6SMBJ6.0C-AU	6	6.67	8.45	10	800	1600	11.4	52.6	KF	AF
P6SMBJ6.0A-AU	P6SMBJ6.0CA-AU	6	6.67	7.67	10	800	1600	10.3	58.3	KG	AG
P6SMBJ6.5-AU	P6SMBJ6.5C-AU	6.5	7.22	9.14	10	500	1000	12.3	48.7	KH	AH
P6SMBJ6.5A-AU	P6SMBJ6.5CA-AU	6.5	7.22	8.30	10	500	1000	11.2	53.6	KK	AK
P6SMBJ7.0-AU	P6SMBJ7.0C-AU	7	7.78	9.86	10	200	400	13.3	45.1	KL	AL
P6SMBJ7.0A-AU	P6SMBJ7.0CA-AU	7	7.78	8.95	10	200	400	12.0	50	KM	AM
P6SMBJ7.5-AU	P6SMBJ7.5C-AU	7.5	8.33	10.67	1	100	200	14.3	42	KN	AN
P6SMBJ7.5A-AU	P6SMBJ7.5CA-AU	7.5	8.33	9.58	1	100	200	12.9	46.5	KP	AP
P6SMBJ8.0-AU	P6SMBJ8.0C-AU	8	8.89	11.3	1	50	100	15.0	40	KQ	AQ
P6SMBJ8.0A-AU	P6SMBJ8.0CA-AU	8	8.89	10.23	1	50	100	13.6	44.1	KR	AR
P6SMBJ8.5-AU	P6SMBJ8.5C-AU	8.5	9.44	11.92	1	10	20	15.9	37.7	KS	AS
P6SMBJ8.5A-AU	P6SMBJ8.5CA-AU	8.5	9.44	10.82	1	10	20	14.4	41.7	KT	AT
P6SMBJ9.0-AU	P6SMBJ9.0C-AU	9	10	12.6	1	5	5	16.9	35.5	KU	AU
P6SMBJ9.0A-AU	P6SMBJ9.0CA-AU	9	10	11.5	1	5	5	15.4	39	KV	AV
P6SMBJ10-AU	P6SMBJ10C-AU	10	11.1	14.1	1	5	5	18.8	31.9	KW	AW
P6SMBJ10A-AU	P6SMBJ10CA-AU	10	11.1	12.8	1	5	5	17	35.3	KX	AX
P6SMBJ11-AU	P6SMBJ11C-AU	11	12.2	15.4	1	1	1	20.1	29.9	KY	AY
P6SMBJ11A-AU	P6SMBJ11CA-AU	11	12.2	14	1	1	1	18.2	33	KZ	AZ
P6SMBJ12-AU	P6SMBJ12C-AU	12	13.3	16.9	1	1	1	22	27.3	LD	BD
P6SMBJ12A-AU	P6SMBJ12CA-AU	12	13.3	15.3	1	1	1	19.9	30.2	LE	BE
P6SMBJ13-AU	P6SMBJ13C-AU	13	14.4	18.2	1	1	1	23.8	25.2	LF	BF
P6SMBJ13A-AU	P6SMBJ13CA-AU	13	14.4	16.5	1	1	1	21.5	27.9	LG	BG
P6SMBJ14-AU	P6SMBJ14C-AU	14	15.6	19.8	1	1	1	25.8	23.3	LH	BH
P6SMBJ14A-AU	P6SMBJ14CA-AU	14	15.6	17.9	1	1	1	23.2	25.8	LK	BK
P6SMBJ15-AU	P6SMBJ15C-AU	15	16.7	21.1	1	1	1	26.9	22.3	LL	BL
P6SMBJ15A-AU	P6SMBJ15CA-AU	15	16.7	19.2	1	1	1	24.4	24	LM	BM
P6SMBJ16-AU	P6SMBJ16C-AU	16	17.8	22.6	1	1	1	28.8	20.8	LN	BN
P6SMBJ16A-AU	P6SMBJ16CA-AU	16	17.8	20.5	1	1	1	26	23.1	LP	BP
P6SMBJ17-AU	P6SMBJ17C-AU	17	18.9	23.9	1	1	1	30.5	19.7	LQ	BQ
P6SMBJ17A-AU	P6SMBJ17CA-AU	17	18.9	21.7	1	1	1	27.6	21.7	LR	BR
P6SMBJ18-AU	P6SMBJ18C-AU	18	20	25.3	1	1	1	32.2	18.6	LS	BS
P6SMBJ18A-AU	P6SMBJ18CA-AU	18	20	23.3	1	1	1	29.2	20.5	LT	BT
P6SMBJ20-AU	P6SMBJ20C-AU	20	22.2	28.1	1	1	1	35.8	16.7	LU	BU
P6SMBJ20A-AU	P6SMBJ20CA-AU	20	22.2	25.5	1	1	1	32.4	18.5	LV	BV
P6SMBJ22-AU	P6SMBJ22C-AU	22	24.4	30.9	1	1	1	39.4	15.2	LW	BW
P6SMBJ22A-AU	P6SMBJ22CA-AU	22	24.4	28	1	1	1	35.5	16.9	LX	BX
P6SMBJ24-AU	P6SMBJ24C-AU	24	26.7	33.8	1	1	1	43	14	LY	BY
P6SMBJ24A-AU	P6SMBJ24CA-AU	24	26.7	30.7	1	1	1	38.9	15.4	LZ	BZ
P6SMBJ26-AU	P6SMBJ26C-AU	26	28.9	36.6	1	1	1	46.6	12.4	MD	CD
P6SMBJ26A-AU	P6SMBJ26CA-AU	26	28.9	33.2	1	1	1	42.1	14.2	ME	CE
P6SMBJ28-AU	P6SMBJ28C-AU	28	31.1	39.4	1	1	1	50	12	MF	CF
P6SMBJ28A-AU	P6SMBJ28CA-AU	28	31.1	35.8	1	1	1	45.4	13.2	MG	CG
P6SMBJ30-AU	P6SMBJ30C-AU	30	33.3	42.2	1	1	1	53.5	11.2	MH	CH
P6SMBJ30A-AU	P6SMBJ30CA-AU	30	33.3	38.3	1	1	1	48.4	12.4	MK	CK
P6SMBJ33-AU	P6SMBJ33C-AU	33	36.7	46.5	1	1	1	59	10.2	ML	CL
P6SMBJ33A-AU	P6SMBJ33CA-AU	33	36.7	42.2	1	1	1	53.3	11.3	MM	CM
P6SMBJ36-AU	P6SMBJ36C-AU	36	40	50.7	1	1	1	64.3	9.3	MN	CN
P6SMBJ36A-AU	P6SMBJ36CA-AU	36	40	46	1	1	1	58.1	10.3	MP	CP
P6SMBJ40-AU	P6SMBJ40C-AU	40	44.4	56.3	1	1	1	71.4	8.4	MQ	CQ
P6SMBJ40A-AU	P6SMBJ40CA-AU	40	44.4	51.1	1	1	1	64.5	9.3	MR	CR




# P6SMBJ-AU SERIES


Part Number		Reverse Stand-off Voltage	Breakdown Voltage		Test Current	Reverse Leakage		Max. Clamp Voltage 10/1000µs	Peak Pulse Current 10/1000µs	Marking Code	
			V <sub>BR</sub> @ I <sub>T</sub>			I <sub>R</sub> @ V <sub>RWM</sub>					
			Min.	Max.		UNI	BI				
UNI	BI	V	V	V	mA	µA	µA	V	A	UNI	BI
<b>600W Transient Voltage Suppressor</b>											
P6SMBJ43-AU	P6SMBJ43C-AU	43	47.8	60.5	1	1	1	76.7	7.8	MS	CS
P6SMBJ43A-AU	P6SMBJ43CA-AU	43	47.8	54.9	1	1	1	69.4	8.6	MT	CT
P6SMBJ45-AU	P6SMBJ45C-AU	45	50	63.3	1	1	1	80.3	7.5	MU	CU
P6SMBJ45A-AU	P6SMBJ45CA-AU	45	50	57.5	1	1	1	72.7	8.3	MV	CV
P6SMBJ48-AU	P6SMBJ48C-AU	48	53.3	67.5	1	1	1	85.5	7	MW	CW
P6SMBJ48A-AU	P6SMBJ48CA-AU	48	53.3	61.3	1	1	1	77.4	7.7	MX	CX
P6SMBJ51-AU	P6SMBJ51C-AU	51	56.7	71.8	1	1	1	91.1	6.6	MY	CY
P6SMBJ51A-AU	P6SMBJ51CA-AU	51	56.7	65.2	1	1	1	82.4	7.3	MZ	CZ
P6SMBJ54-AU	P6SMBJ54C-AU	54	60	76	1	1	1	96.3	6.2	ND	DD
P6SMBJ54A-AU	P6SMBJ54CA-AU	54	60	69	1	1	1	87.1	6.9	NE	DE
P6SMBJ58-AU	P6SMBJ58C-AU	58	64.4	81.6	1	1	1	103	5.8	NF	DF
P6SMBJ58A-AU	P6SMBJ58CA-AU	58	64.4	74.1	1	1	1	93.6	6.4	NG	DG
P6SMBJ60-AU	P6SMBJ60C-AU	60	66.7	84.5	1	1	1	107	5.6	NH	DH
P6SMBJ60A-AU	P6SMBJ60CA-AU	60	66.7	76.7	1	1	1	96.8	6.2	NK	DK
P6SMBJ64-AU	P6SMBJ64C-AU	64	71.1	90.1	1	1	1	114	5.3	NL	DL
P6SMBJ64A-AU	P6SMBJ64CA-AU	64	71.1	81.8	1	1	1	103	5.8	NM	DM
P6SMBJ70-AU	P6SMBJ70C-AU	70	77.8	98.6	1	1	1	125	4.8	NN	DN
P6SMBJ70A-AU	P6SMBJ70CA-AU	70	77.8	89.5	1	1	1	113	5.3	NP	DP
P6SMBJ75-AU	P6SMBJ75C-AU	75	83.3	105.7	1	1	1	134	4.5	NQ	DQ
P6SMBJ75A-AU	P6SMBJ75CA-AU	75	83.3	95.8	1	1	1	121	4.9	NR	DR
P6SMBJ78-AU	P6SMBJ78C-AU	78	86.7	109.8	1	1	1	139	4.3	NS	DS
P6SMBJ78A-AU	P6SMBJ78CA-AU	78	86.7	99.7	1	1	1	126	4.7	NT	DT
P6SMBJ85-AU	P6SMBJ85C-AU	85	94.4	119.2	1	1	1	151	3.9	NU	DU
P6SMBJ85A-AU	P6SMBJ85CA-AU	85	94.4	108.2	1	1	1	137	4.4	NV	DV
P6SMBJ90-AU	P6SMBJ90C-AU	90	100	126.5	1	1	1	160	3.8	NW	DW
P6SMBJ90A-AU	P6SMBJ90CA-AU	90	100	115.5	1	1	1	146	4.1	NX	DX
P6SMBJ100-AU	P6SMBJ100C-AU	100	111	141	1	1	1	179	3.4	NY	DY
P6SMBJ100A-AU	P6SMBJ100CA-AU	100	111	128	1	1	1	162	3.7	NZ	DZ
P6SMBJ110-AU	P6SMBJ110C-AU	110	122	154.5	1	1	1	196	3	PD	ED
P6SMBJ110A-AU	P6SMBJ110CA-AU	110	122	140.5	1	1	1	177	3.4	PE	EE
P6SMBJ120-AU	P6SMBJ120C-AU	120	133	169	1	1	1	214	2.8	PF	EF
P6SMBJ120A-AU	P6SMBJ120CA-AU	120	133	153	1	1	1	193	3.1	PG	EG
P6SMBJ130-AU	P6SMBJ130C-AU	130	144	182.5	1	1	1	231	2.6	PH	EH
P6SMBJ130A-AU	P6SMBJ130CA-AU	130	144	165.5	1	1	1	209	2.9	PK	EK
P6SMBJ150-AU	P6SMBJ150C-AU	150	167	211.5	1	1	1	268	2.2	PL	EL
P6SMBJ150A-AU	P6SMBJ150CA-AU	150	167	192.5	1	1	1	243	2.5	PM	EM
P6SMBJ160-AU	P6SMBJ160C-AU	160	178	226	1	1	1	287	2.1	PN	EN
P6SMBJ160A-AU	P6SMBJ160CA-AU	160	178	205	1	1	1	259	2.3	PP	EP
P6SMBJ170-AU	P6SMBJ170C-AU	170	189	239.5	1	1	1	304	2	PQ	EQ
P6SMBJ170A-AU	P6SMBJ170CA-AU	170	189	217.5	1	1	1	275	2.2	PR	ER
P6SMBJ180-AU	P6SMBJ180C-AU	180	198	253.8	1	1	1	322	1.9	PS	ES
P6SMBJ180A-AU	P6SMBJ180CA-AU	180	198	230.4	1	1	1	292	2.1	PT	ET
P6SMBJ190-AU	P6SMBJ190C-AU	190	209	267.9	1	1	1	340	1.8	PU	EU
P6SMBJ190A-AU	P6SMBJ190CA-AU	190	209	243.2	1	1	1	308	2	PV	EV
P6SMBJ200-AU	P6SMBJ200C-AU	200	220	282	1	1	1	358	1.7	PW	EW
P6SMBJ200A-AU	P6SMBJ200CA-AU	200	220	256	1	1	1	324	1.9	PX	EX
P6SMBJ210-AU	P6SMBJ210C-AU	210	231	296.1	1	1	1	376	1.6	PY	EY
P6SMBJ210A-AU	P6SMBJ210CA-AU	210	231	268.8	1	1	1	340	1.8	PZ	EZ
P6SMBJ220-AU	P6SMBJ220C-AU	220	242	310.2	1	1	1	394	1.5	QD	FD
P6SMBJ220A-AU	P6SMBJ220CA-AU	220	242	281.6	1	1	1	356	1.7	QE	FE




# P6SMBJ-AU SERIES

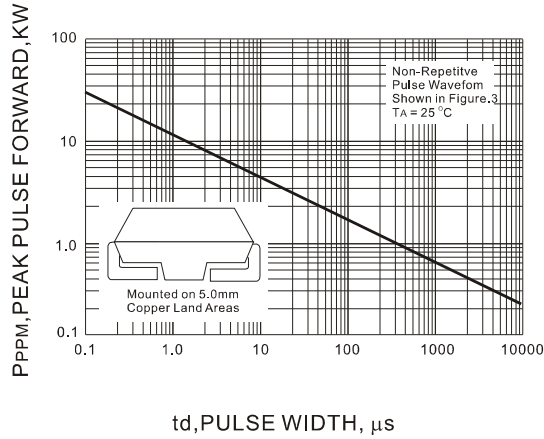


**Fig.1 PEAK PULSE POWER RATING CURVE**

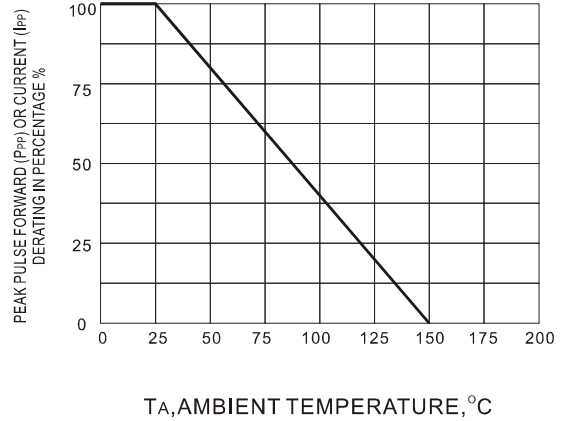


**Fig.2 DERATING CURVE**

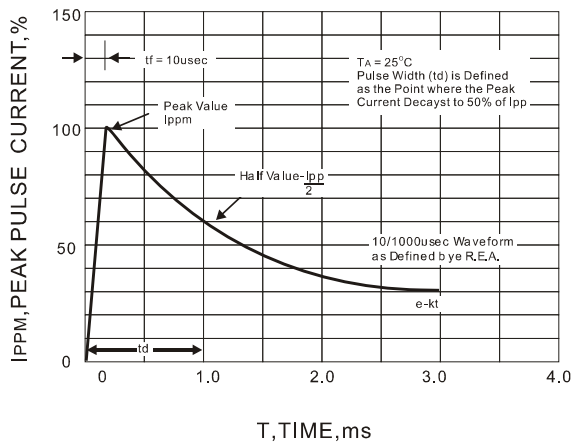

**Fig.3 PULSE WAVEFORM**

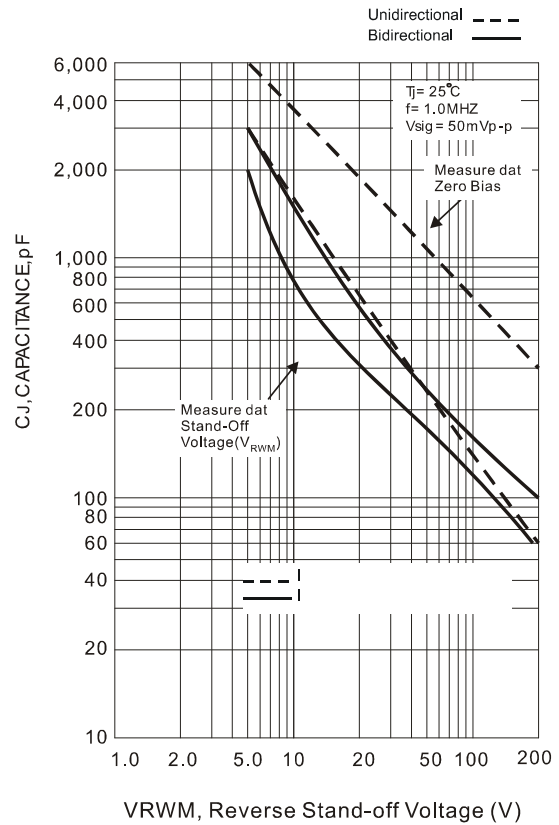

**Fig.4 TYPICAL CAPACITANCE**

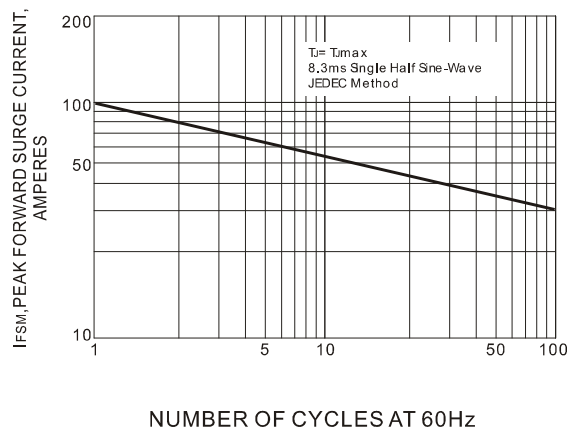

**Fig.5 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**




## P6SMBJ-AU SERIES

### MOUNTING PAD LAYOUT

SMB / DO-214AA

Unit : inch(mm)

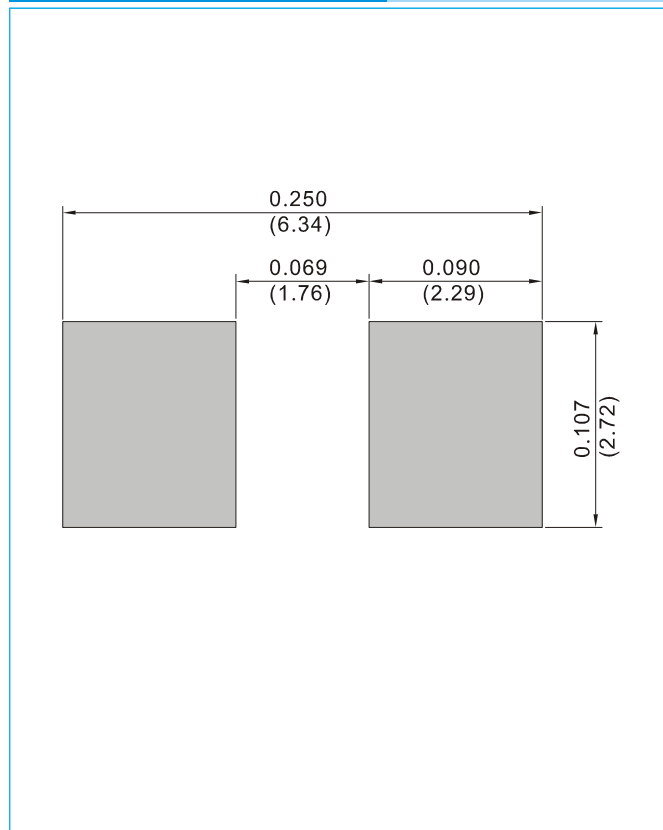

### ORDER INFORMATION

- Packing information  
T/R - 3K per 13" plastic Reel  
T/R - 0.5K per 7" plastic Reel



## P6SMBJ-AU SERIES

### Part No\_packing code\_Version

P6SMBJ5.0-AU\_R1\_000A1

P6SMBJ5.0-AU\_R2\_000A1

For example :

**RB500V-40\_R2\_00001**



Packing Code <b>XX</b>				Version Code <b>XXXXX</b>		
Packing type	1 <sup>st</sup> Code	Packing size code	2 <sup>nd</sup> Code	HF or RoHS	1 <sup>st</sup> Code	2 <sup>nd</sup> ~5 <sup>th</sup> Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



## P6SMBJ-AU SERIES

---

### Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.