

## Model Name NH14M09TA

High Precision Oscillator (Twin-OCXO)  
for Fixed Communication Equipment

### Main Application

- Base stations for system mobile communications
- Optical transmission system
- Measuring instrument
- Synthesizer
- Exchanger
- High-end router

### Features

- Compact and excellent temperature characteristics.
- Excellent long-term frequency stability.
- Excellent phase noise characteristics.
- Hermetic sealing package for excellent environmental-proof performance.
- Supports wide temperature range (-40 to +85 °C)

Pb Free


RoHS Compliant  
Directive 2011/65/EU



### Specifications

Item	Measurement condition	Model	NH14M09TA
Nominal frequency range (MHz)			5 to 40
Nominal frequency (MHz)			10, 12.8, 13, 16.384, 19.2, 20, 25, 26, 30.72, 38.4, 38.88, 40
Supply voltage [V <sub>CC</sub> ] (V)			+3.3 ±5 %
Power consumption (W)	at start		Typ. 1.3 (Max. 2.0)
	when stable (+25 °C)		Typ. 0.6 (Max. 1.0)
Output voltage			LVC MOS (V <sub>OL</sub> Max. 0.3 V, V <sub>OH</sub> Min. 3 V)
Symmetry (%)	at 1/2 V <sub>CC</sub>		45 to 55
Load impedance (pF)			15
Operating temperature range (°C)			Refer to *1
Storage temperature range (°C)			-40 to +85
Stabilization time	Stabilization Time (Frequency Stability) within ±100 ×10 <sup>-9</sup> after power on at +25°C, based on frequency after 60minutes operation.		Max. 3 minutes
Long-term frequency stability	Based on frequency after 30 days operation		Max. ±5×10 <sup>-9</sup> /day
	Based on frequency after 30 days operation		Max. ±500×10 <sup>-9</sup> /year
Frequency/Temperature characteristics			Refer to *1
Frequency/Voltage coefficient	V <sub>CC</sub> +3.3 V ±5 %		Typ. ±5×10 <sup>-9</sup> (Max. ±10×10 <sup>-9</sup> )
Frequency control range	V <sub>cont</sub> +0.2 V to +2.8 V (@ +1.5V)		Min. ±5.0×10 <sup>-6</sup>
Frequency change polarity	Frequency change polarity		Positive
	Linearity		Typ. 1%

### Dimensions

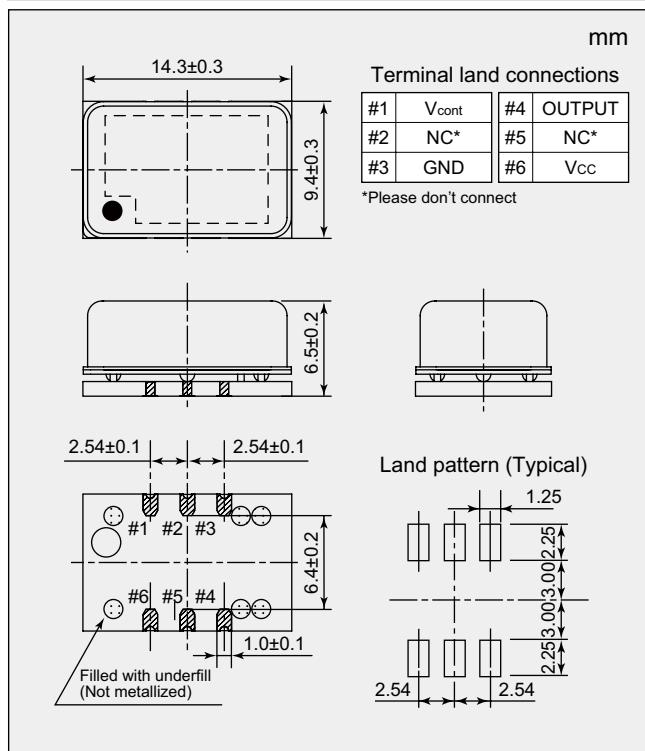

### Reference Value

	Offset frequency	dBc/Hz
Phase noise (at 10 MHz)	1 Hz	-75
	10 Hz	-100
	100 Hz	-125
	1 kHz	-150
	10 kHz	-160

The value of phase noise changes when the frequency changes.

### \*1 List of Options

Operating temperature range (°C)	-20 to +70
Frequency/temperature characteristics	Max. ±10×10 <sup>-9</sup>
Ordering Code	NH14M09TA-[ ]-NSA3540F
Operating temperature range (°C)	-40 to +85
Frequency/temperature characteristics	Max. ±10×10 <sup>-9</sup>
Ordering Code	NH14M09TA-[ ]-NSA3540E

Please specify a NDK's nominal frequency in the square brackets.  
(Example 10MHz : Please specify 10M in the square brackets.)  
Frequencies other than the above are available.  
Feel free to contact our sales representatives.