
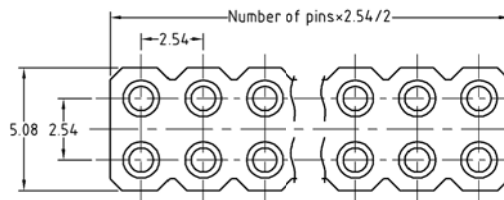


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/30/16	
A		UPDATED SPEC.	6/20/16	HR/CK



4.30mm Length



Positions: 02 thru 40
Example: PH2-3D-08-MVF-4355 = 2X4 PIN

ADAM P/N	Initial Height
PH2-3D-XX-MVF-4355	5.5mm
PH2-3D-XX-MVF-4360	6.0mm



5.30mm Length

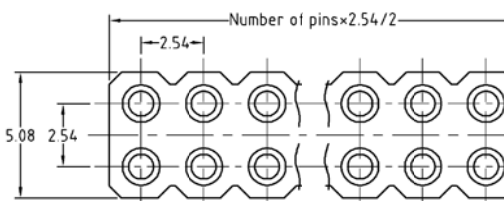

Positions: 02 thru 40
Example: PH2-3D-08-MVF-5365 = 2X4 PIN

ADAM P/N	Initial Height
PH2-3D-XX-MVF-5365	6.5mm
PH2-3D-XX-MVF-5370	7.0mm
PH2-3D-XX-MVF-5375	7.5mm
PH2-3D-XX-MVF-5380	8.0mm

7.30mm Length

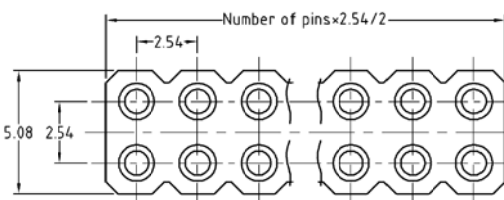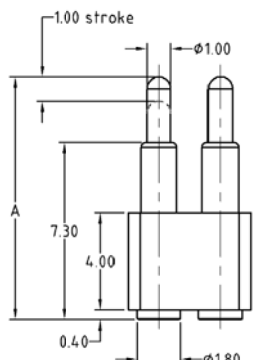

Positions: 02 thru 40
Example: PH2-3D-08-MVF-7390 = 2X4 PIN

ADAM P/N	Initial Height
PH2-3D-XX-MVF-7390	9.0mm
PH2-3D-XX-MVF-73A0	10.0mm
PH2-3D-XX-MVF-73B0	11.0mm

SPECIFICATIONS:

Material:

Insulator: Black plastics, Color: Black, rated UL 94V-0

Plunger: Brass, Gold plated

Barrel: Brass, Gold plated

Spring: SUS Surface treatment

Electrical:

Voltage rating: 12 VDC max

Current rating: 1 A max

Contact resistance: 20 mohms max

Mechanical:

Spring force: 90g±20g @ 1.0mm working stroke

Full stroke: 1.40mm

Life test: 1,000,000 Cycles

Temperature Rating:

Operating temperature: -40°C to +80°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED HOLES .X ± .25 .XX ± .15 .XXX ± .05		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
		TITLE CUSTOM LENGTH TUBE DOUBLE ROW STRIPS 4.00MM INSULATOR HEIGHT, SMT LOADED	
APPROVALS		DATE	
DRAWN	HR	3/30/16	
CHECKED	CK	3/30/16	
APPROVED			
SIZE	PART NO.	REV.	
X	PH2-3D-XX-MVF-XXXX	A	
REF:	S00170C	SCALE:	NTS
		SHEET 1 OF 2	

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #



Description

Date

Appr

SEE SHT 1 OF 2 FOR REVISION

10.30mm Length

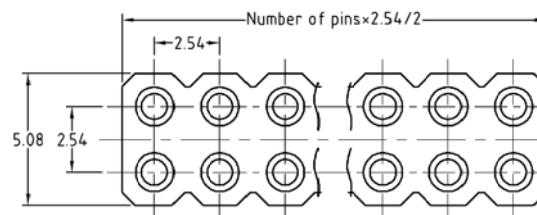
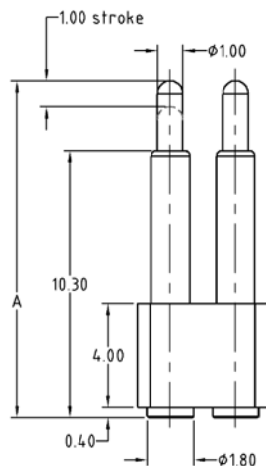


Positions: 02 thru 40

Example: PH2-3D-08-MVF-A3C0 = 2X4 PIN

ADAM P/N	Initial Height
PH2-3D-XX-MVF-A3C0	12.0mm
PH2-3D-XX-MVF-A3D0	13.0mm
PH2-3D-XX-MVF-A3E0	14.0mm

12.30mm Length

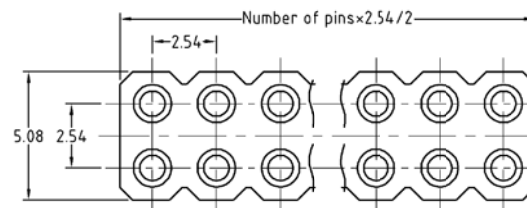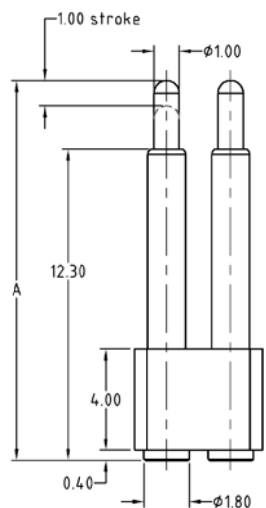

Positions: 02 thru 40

Example: PH2-3D-08-MVF-C3F0 = 2X4 PIN

ADAM P/N	Initial Height
PH2-3D-XX-MVF-C3F0	15.0mm

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
HOLES
MM
.X ± .25
.XX ± .15
.XXX ± .05

Ø.XX ± .013

APPROVALS

DATE

DRAWN

HR

3/30/16

CHECKED

CK

3/30/16

APPROVED

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

CUSTOM LENGTH TUBE DOUBLE ROW STRIPS
4.00MM INSULATOR HEIGHT, SMT LOADED

SIZE

X

PART NO.

PH2-3D-XX-MVF-XXXX

REV.

A

REF: S00170C

SCALE: NTS

SHEET 2 OF 2

6

5

4

3

2

1