


Keysight Technologies

Signal Studio for Mobile WiMAX™ N7615B

Technical Overview

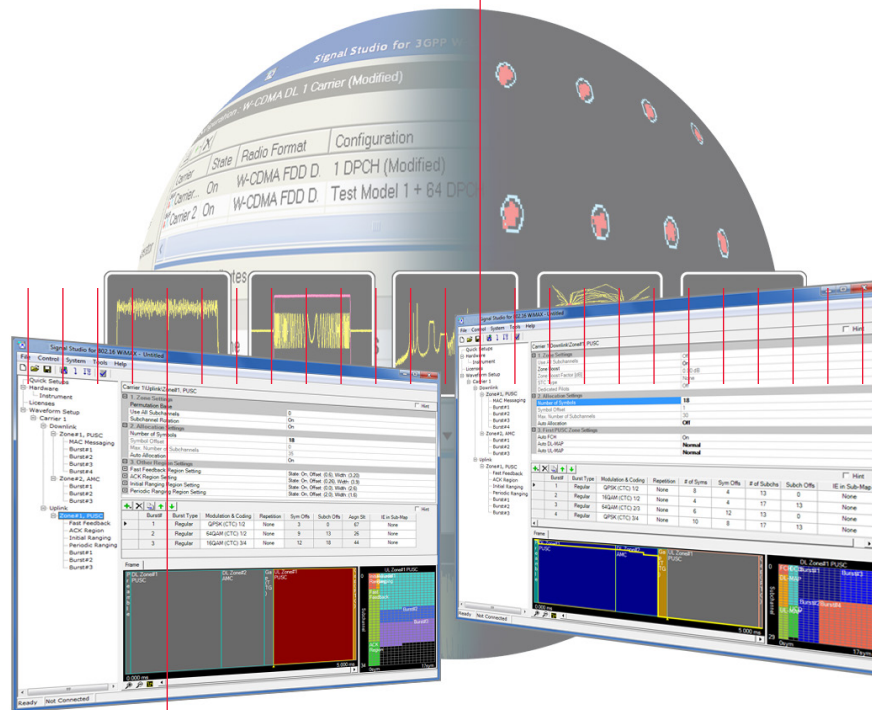

- Create Keysight validated and performance optimized Mobile WiMAX and WiBro reference signals compliant to the IEEE 802.16 WirelessMAN-OFDMA PHY standards
- Test components with single- and multi-carrier signals
- Configure downlink and uplink channel parameters for testing space-time coding (STC) and MIMO features, as well as new features in the IEEE 802.16-2009 (formerly 802.16Rev2) standard such as cyclic delay diversity (CDD) and FDD/H-FDD frames
- Accelerate the signal creation process with a user interface based on parameterized and graphical signal configuration and tree-style navigation

Simplify Mobile WiMAX Signal Creation

Typical Measurements

Test components with basic capabilities

- ACLR
- CCDF
- EVM
- Modulation accuracy
- Channel power
- Occupied bandwidth

Verify receivers with advanced capabilities

- Sensitivity
- Maximum input level
- Selectivity
- Blocking
- Intermodulation
- Demodulation
- Power control
- Packet error rate

Keysight Technologies, Inc. Signal Studio software is a flexible suite of signal-creation tools that will reduce the time you spend on signal simulation. For Mobile WiMAX, Signal Studio's performance-optimized reference signals—validated by Keysight—enhance the characterization and verification of your devices. Through its application-specific user-interface you'll create standards-based and custom test signals for component, transmitter, and receiver test.

Component and transmitter test

Signal Studio's basic capabilities use waveform playback mode to create and customize waveform files needed to test components and transmitters. Its user-friendly interface lets you configure signal parameters, calculate the resulting waveforms and download files for playback. The applications for these partially-coded, statistically correct signals include

- Parametric test of components, such as amplifiers and filters
- Performance characterization and verification of RF sub-systems

Receiver test

Signal Studio's advanced capabilities enable you to create fully channel-coded signals for receiver bit-error-rate (BER) or packet-error-rate (PER) analysis. Applications include

- Performance verification and functional test of receivers, during RF/baseband integration and system verification
- Coding verification of baseband subsystems, including FPGAs, ASICs, and DSPs

Apply your signals in real-world testing

Once you have set up your signals in Signal Studio, you can download them to a variety of Keysight instruments. Signal Studio software complements these platforms by providing a cost-effective way to tailor them to your test needs in design, development and production test.

- Vector signal generators
 - X-Series: MXG and EXG
 - PSG
 - ESG
 - First-generation MXG
 - PXIe M9381A
- EXT wireless communication test set
- PXB baseband generator and channel emulator
- 16800/16900 Series logic analyzers
- DigRF exerciser module
- M9252A DigRF host adapter
- SystemVue simulation software

Component and Transmitter Test



Figure 1. Typical component test configuration using Signal Studio's basic capabilities with a Keysight X-Series signal generator and an X-Series signal analyzer

Signal Studio's basic capabilities enable you to create and customize Mobile WiMAX waveforms to characterize the power and modulation performance of your transmitter or receiver components. Easy manipulation of a variety of signal parameters, including channel bandwidth, FFT size, frame duration, guard period, and modulation type, simplifies signal creation.

- Create spectrally-correct signals for ACLR, channel power, spectral mask, and spurious testing
- Configure TDD or FDD downlink or uplink frames
- Configure single or multi-carrier waveforms, with each carrier having its own settings for bandwidth, frequency offsets, power, and preamble index/cell ID
- Set parameters such as channel power, number of symbols of data, and modulation type (QPSK, 16QAM, 64QAM) for modulation verification and analysis, such as EVM tests
- View CCDF, spectrum, power envelope, and time domain graphs to investigate the effects of various settings on these parameters

Receiver Test

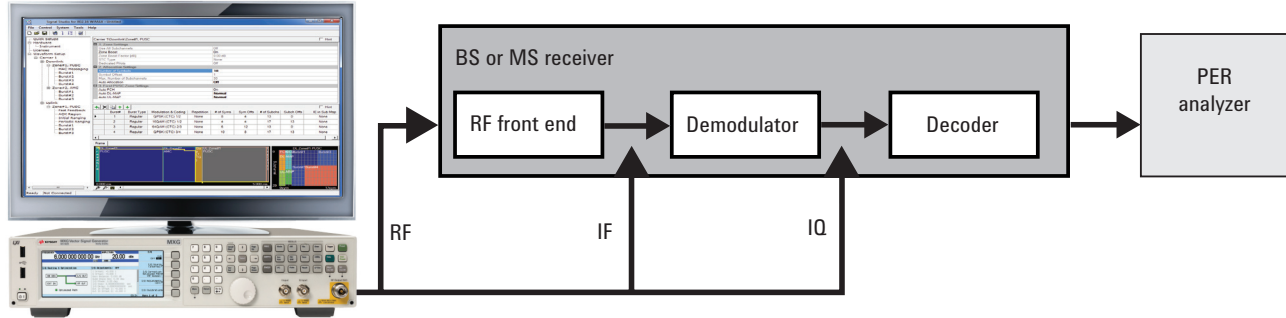


Figure 2. Generate fully channel-coded signals to evaluate the PER of your receiver with Keysight X-Series signal generators and Signal Studio's advanced capabilities.

Signal Studio's advanced capabilities provide additional features to help you create 802.16e OFDMA standard-compliant frame structures for testing receiver designs in all stages of development. Set the output mode to build frames that are TDD, FDD, or FDD/H-FDD for downlink or uplink only. Create multiple bursts and MAC PDUs and configure the PDUs individually using standard data patterns or user-defined data. The MAC PDU parameters include MAC PDU mode (with or without header and CRC), CID, data type, and data length. Each data burst can be fully coded with convolutional coding (CC) or convolutional turbo coding (CTC), randomization, and interleaving. You also have the flexibility to configure individual burst parameters, such as modulation type and rate, repetition coding, and power boosting.

For easy burst configuration, the software includes an auto-allocation feature which automatically selects a valid combination of symbol and subchannel settings. You can choose regular data bursts or HARQ bursts.

Mobile station receiver testing

- Add downlink PUSC, FUSC, or AMC zones
- Automatically generate FCH, DL-MAP, UL-MAP, DCD, and UCD for downlink frame
- Choose normal or compressed MAP, or sub-DL-UL-MAPs in the first DL-PUSC zone
- Automatic or manual setting of DIUC and UIUC values
- Test MIMO using Matrix A (space-time coding) or Matrix B (2x2 MIMO)

Base station receiver testing

- Configure uplink PUSC, OPUSC, AMC, or sounding zones
- Add an initial or periodic ranging region, or a fast feedback region to transmit user-defined data bits, with automatic data wrapping around these special regions
- Test MIMO using uplink collaborative spatial multiplexing (1x2 MIMO)

For STC/MIMO testing, the Signal Studio software can generate the waveforms for the unfaded signal at the transmit antennas. The software also allows you to incorporate SISO or MIMO fading effects in the waveform for receiver testing. Various channel fading models are provided in the Signal Studio software, including ITU Pedestrian A and B, Vehicular A and B, Vehicular A with long channel, and the correlated MIMO channel models used for the Mobile WiMAX Radio Conformance Tests. Static multipath fading with up to 20 paths can also be applied. Long waveform files containing multiple frames with embedded fading provide a simple solution for testing STC/MIMO receivers without the added expense of channel emulation hardware.

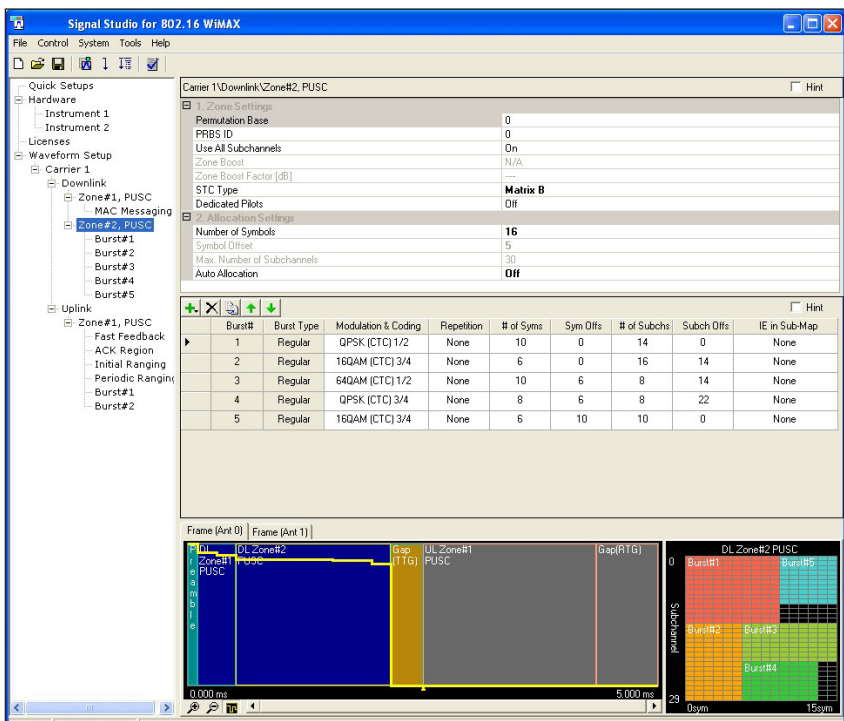


Figure 3. Navigate through the frame elements using the software's tree view in the left panel to quickly customize OFDMA waveforms with multiple zones and data bursts.

Features Summary

Feature/Parameter	Component & trans- mitter testing		Receiver testing	
	Basic waveform playback mode		Advanced waveform playback mode	
	802.16 OFDMA	802.16 OFDMA	802.16 OFDMA	802.16Rev2 OFDMA
Waveform properties:				
WiMAX system parameters setup	■	■	■	■
Marker settings	■	■	■	■
Baseband quadrature angle and gain balance	■	■	■	■
Noise setup	■	■	■	■
Multi-carrier waveform generation	■	■	■	■
Add one or more zone types	■	■	■	■
Modulation: QPSK, 16QAM, 64QAM	■	■	■	■
Data pattern bit offset	■			
Data length based on number of symbols	■			
Data source type: S(QPSK), S(16QAM), S(64QAM), PN9, PN15, user defined	■	■		■
Reference specification:				
802.16-2004/Cor1/D2	■	■	■	■
802.16-2004/Cor1/D3	■	■	■	■
802.16Rev2	■	■	■	■
Carrier settings: MAC CRC order, PRBS method, frame number increment on/off		■	■	
RMS power information display	■	■	■	■
Edit MAC message settings: include DCD/UCD, allow DCD/UCD to be in separate bursts from DL-MAP and UL-MAP		■	■	
Choose FEC coding type and rate: raw, CC, CTC		■	■	
Configure MAC PDUs for each burst		■	■	
Specify MAC PDU data length in bytes		■	■	
Configure data bursts in each zone:				
Regular DL and UL data burst		■	■	
UL collaborative SM burst		■	■	
DL/UL HARQ bursts (Chase combining)		■	■	
DL/UL HARQ bursts (incremental redundancy)			■	
Fading emulation included in waveform data: static multi-path, mobile SISO and MIMO fading, and dual 1x2 MIMO for UL collaborative SM		■	■	
User-defined channel correlation matrix			■	
New AMC zone types: 1x6, 3x2, 2x6			■	
Downlink				
Group Bitmask	■	■	■	■
AMC physical bands bitmap	■	■	■	■
Include FCH, DL-MAP, UL-MAP:				
FCH, normal or compressed DL-MAP and UL-MAP		■	■	
Sub-DL-UL-MAP in first DL-PUSC zone		■	■	
DL-MAP IE for STC, UL-MAP IE for collaborative multiplexing		■	■	
Support STC and MIMO:				
2 antennas STC (Matrix A) in DL-PUSC zone		■	■	
2x2 MIMO (Matrix B) in DL-PUSC		■	■	
Mixed Matrix A and B bursts in same zone			■	
STC/MIMO in AMC zones			■	
Dedicated pilots for DL-PUSC and DL-AMC zones		■	■	
Cyclic delay diversity (CDD) for 2 antennas			■	
FDD/H-FDD output modes			■	

Features Summary

Feature/Parameter	Component & transmitter testing	Receiver testing	
	Basic waveform playback mode	Advanced waveform playback mode	
	802.16 OFDMA	802.16 OFDMA	802.16Rev2 OFDMA
Uplink			
Subchannels and AMC physical bands bitmap	■	■	■
Uplink ranging region		■	■
Initial/handover ranging (2 symbols)		■	■
Periodic ranging/BW request (1 symbol)		■	■
Uplink fast feedback region:			
Fast feedback channel allocation using CQICH allocation IE		■	■
Fast feedback, 4 bits		■	■
Enhanced fast feedback, 6 bits		■	■
MIMO fast feedback, 3 bits		■	■
ACK, 1 bit		■	■
Collaborative spatial multiplexing (SM) in UL-PUSC zone		■	■
Subchannel rotation on/off for UL-PUSC zone		■	■
UL sounding zone and sounding message		■	■

Supported Standards and Test Configurations

IEEE publication	Date
802.16-2004	2004
P802.16-2004/Cor1/D2 and D3	2005
802.16e-2005	2006
802.16Rev2/D6	2008

Performance Characteristics

Definitions

Characteristic value:

Non-warranted value based on testing during development phase of this product. The majority of instruments tested met this value.

Performance range:

Non-warranted value based on testing during development phase of this product. All instruments tested performed within this range.

The following performance characteristics table shows the error vector magnitude (EVM) results for each instrument listed. The results are applicable for both non-MIMO configuration and STC/MIMO (Matrix A and Matrix B) configurations. Waveform parameter settings are shown below.

Multiple DL-PUSC waveforms were used with different settings:

- Bandwidths/FFTs = 5 MHz/512, 10 MHz/1024
- Burst length = 30 symbols, 5 ms frame length
- Modulation types = QPSK and 64 QAM
- Symbol rolloff = 2.78% (5 MHz BW), 5.56% (10 MHz BW)
- Power level = –20 dBm (Option 1EA = +8 dBm)

EVM performance characteristics

Carrier frequency	N5172B EXG/ N5182B MXG (with Option UNV and 1EA)	N5162A/N5182A MXG (with Option UNV)	N5162A/N5182A MXG (with Options UNV and 1EA)	E4438C ESG	E8267D PSG ¹	M9381A	
2.5 GHz	Characteristic value ²	–56.1 dB (0.16% rms)	–48.5 dB (0.4% rms)	–48.0 dB (0.4% rms)	–48.5 dB (0.4% rms)	–48.1 dB (0.4% rms)	–53.5 dB (0.21% rms)
	Performance range ³	–59.8 to –55.9 dB (0.10 to 0.16% rms)	–51.2 to –48.4 dB (0.27 to 0.38% rms)	–53.6 to –48.4 dB (0.21 to 0.38% rms)	–51.4 to –48.0 dB (0.27 to 0.40% rms)	–52.4 to –47.4 dB (0.24 to 0.43% rms)	–54.8 to –53.3 dB (0.18 to 0.22% rms)
3.5 GHz	Characteristic value ²	–53.2 dB (–0.22% rms)	–46.0 dB (0.5% rms)	–46.0 dB (0.5% rms)	–46.0 dB (0.5% rms)	–48.9 dB (0.4% rms)	–48.6 dB (0.37% rms)
	Performance range ³	–57.9 to –53.0 dB (0.13 to 0.22% rms)	–48.6 to –45.7 dB (0.37 to 0.52% rms)	–50.8 to –46.2 dB (0.29 to 0.49% rms)	–50.2 to –44.7 dB (0.31 to 0.58% rms)	–42.7 to –48.3 dB (0.23 to 0.38% rms)	–49.7 to –48.2 dB (0.33 to 0.39% rms)

1. Performance characteristics are based on PSG signal generators with the standard pulse modulation Option E8267D-UNU. EVM performance may degrade with the narrow pulse modulation Option E8267D-UNW, so Option E8267D-UNW is not recommended for use with the N7615B.
2. Non-warranted value based on testing during development phase of this product. The majority of instruments tested met this value.
3. Non-warranted range based on testing during development phase of this product. All instruments tested performed within this range.

Ordering Information

Try Before You Buy!

Free 30-day trials of Signal Studio software provide unrestricted use of the features and functions, including signal generation, with your compatible platform. Redeem a trial license online at

www.keysight.com/find/SignalStudio_trial

Hardware configurations

To learn more about compatible hardware and required configurations, please visit: www.keysight.com/find/SignalStudio_platforms

PC requirements

A PC is required to run Signal Studio. www.keysight.com/find/SignalStudio_pc

Software licensing and configuration

Signal Studio offers flexible licensing options, including:

- **Fixed license:** Allows you to create unlimited I/Q waveforms with a specific Signal Studio product and use them with a single, specific platform.
- **Transportable/floating license:** Allows you to create unlimited I/Q waveforms with a specific Signal Studio product and use them with a single platform (or PC in some cases) at a time. You may transfer the license from one product to another.
- **Waveform license:** Allows you to generate up to 545 user-configured I/Q waveforms with any Signal Studio product and use them with a single, specific platform.

The table below lists fixed, perpetual licenses only; additional license types may be available. For detailed licensing information and configuration assistance, please refer to the Licensing Options web page at www.keysight.com/find/SignalStudio_licensing

N7601B Signal Studio for cdma2000/1xEV-DO

Model-Option	Description
Connectivity	
N7615B-1FP	Connect to E4438C ESG
N7615B-2FP	Connect to E8267D PSG
N7615B-3FP	Connect to N5182/62 MXG, N5172 EXG
N7615B-6FP	Connect to N5106A PXB
N7615B-7FP	Connect to Keysight simulation software
N7615B-8FP	Connect to E6607 EXT
N7615B-9FP	Connect to M9381A and M9252A
N7615B-R7L	Connect to 16800/16900/N5343A
Capability	
N7615B-EFP	Basic Mobile WiMAX
N7615B-QFP	Advanced Mobile WiMAX
N7615B-RFP	Advanced Mobile WiMAX 802.16 Updates
N7615B-R7Z	Basic Mobile WiMAX for 16800/16900/N5343A
N7615B-R89	Advanced Mobile WiMAX for 16800/16900/N5343A
N7615B-R8A	Advanced Mobile WiMAX 802.16 Updates for 16800/16900/N5343A

Additional Information

Websites

Access the comprehensive online documentation, which includes the complete software HELP file and configuration guide

www.keysight.com/find/n7615b

www.keysight.com/find/SignalStudio

Signal generators—www.keysight.com/find/sg

E6607 EXT wireless communications test set—www.keysight.com/find/ext

Logic analyzers—www.keysight.com/find/logic

DigRF modules—www.keysight.com/find/rdx

Literature

WiMAX Concepts and RF Measurements, Application Note, 5989-2027EN

Signal Studio Software, Brochure, 5989-6448EN

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
 (BP-07-01-14)

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.

Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.

www.keysight.com/quality

Keysight Technologies, Inc.

DEKRA Certified ISO 9001:2008

Quality Management System

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

WiMAX is a US trademark of the WiMAX Forum.

ATCA, AdvancedTCA, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.

