


LTR	DESCRIPTION	DATE	BY
-	Released	6/14/99	JCL

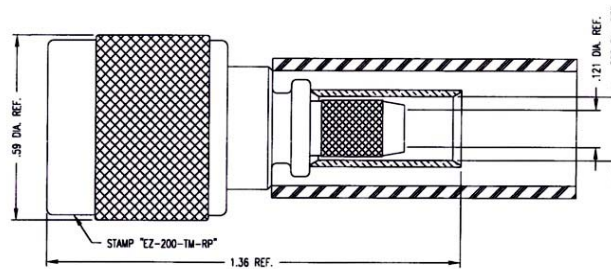

### I. MATERIALS & FINISHES

center contact: Gold Plated Beryllium Copper – female pin  
 outer contact: Alballoy Plated Brass  
 body: Alballoy Plated Brass  
 coupling nut: Alballoy Plated Brass  
 crimp sleeve: Alballoy Plated Copper  
 dielectric: Teflon® PTFE  
 gasket: Silicone Rubber  
 shrink sleeve: Adhesive Lined Polyolefin  
 crimp size: .213" hex (M22520/5-19)

### II. ELECTRICAL PROPERTIES

impedance: 50 ohms  
 working voltage: 500 vrms (max)  
 vswr: 1.25:1 (max) up to 3 GHz  
 insertion loss:  $0.1 \times \sqrt{F}$ ghz

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

### Approvals

Drawn JCL 6/14/99

Check

Prj. Mgr.

Prd. Mgr.

QA Mgr.



### TIMES MICROWAVE SYSTEMS

Wallingford, CT 06492  
 (203) 949-8400; (203) 949-8423.Fax  
 www.timesmicrowave.com

### EZ-200-TM-RP

Reverse Polarity TNC Male (female pin)  
 for LMR-200 Cable

Size  
A

CAGE CODE  
68999

Drawing No.:

3190-792

Scale: NA

Rev. ( )

Sheet: 1 of 1