

Wall Industries, Inc.

DTEM1090 SERIES

100~240VAC Input Voltage Range
C14, C8, and C6 AC Inlet Connector Types
70~100 Watts, Single Outputs
Medical AC/DC Desktop Power Supplies



IEC-320-C14



IEC-320-C8



IEC-320-C6

FEATURES

- Single Outputs
- CEC/Energy Star Level V Compliant
- RoHS Compliant
- Short Circuit and Over Voltage Protection
- MTBF: > 30,000 Hours
- 100~240VAC Input Voltage Range
- C14, C8, and C6 AC Inlet Connectors Available
- Optional Output Connectors Available
- Dimensions: 5.96" x 2.31" x 1.35"
- EN/IEC 60601 and UL60601, 3rd Edition Medical Approvals

DESCRIPTION

The DTEM1090 series of medical AC/DC desktop power supplies provides up to 100 Watts of continuous output power in a 5.96" x 2.31" x 1.35" package. This series consists of single output models with a wide input voltage range of 100~240VAC. The DTEM1090 series is RoHS and CEC/Energy Star Level V compliant and has EN/IEC 60601 and UL60601, 3rd edition medical approvals. These models are also protected against over voltage and short circuit conditions. This series has three AC inlet connector types available: IEC-320-C14, IEC-320-C8, and IEC-320-C6. Please call factory for ordering details.

SPECIFICATIONS: DTEM1090 SERIES

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
We reserve the right to change specifications based on technological advances.

| SPECIFICATION | TEST CONDITIONS | Min | Typ | Max | Unit |
|--|---|--|-----|------|-------|
| INPUT SPECIFICATIONS | | | | | |
| Input Voltage Range | | 100 | | 240 | VAC |
| Input Frequency | | 50 | | 60 | Hz |
| Input Current | | | | 3.15 | A |
| Inrush Current | | | | 100 | A |
| OUTPUT SPECIFICATIONS | | | | | |
| Output Voltage (<i>See Note 2</i>) | | See Table | | | |
| Line Regulation | defined by changing $\pm 10\%$ of input voltage from nominal line and rated load. | -1 | | +1 | % |
| Load Regulation | | -5 | | +5 | % |
| Output Current | | See Table | | | |
| Minimum Load | | 0 | | | A |
| Output Power | | See Table | | | |
| Ripple & Noise | Measured at nominal line and full load with 20MHz limited bandwidth and 0.1 μ F ceramic and 47 μ F aluminum capacitors in parallel on the output. | | 350 | | mVp-p |
| Hold-up Time | | 8.3 | | | ms |
| Turn-on Time | | | | 3 | s |
| PROTECTION | | | | | |
| Over Voltage Protection | | Automatic recovery | | | |
| Short Circuit Protection | | Automatic recovery | | | |
| GENERAL SPECIFICATIONS | | | | | |
| Efficiency (typical) | | | 82 | | % |
| ENVIRONMENTAL SPECIFICATIONS | | | | | |
| Operating Temperature | | 0 | | 40 | °C |
| Storage Temperature | | -20 | | 85 | °C |
| Storage Humidity | | 5 | | 95 | % |
| MTBF | | 30,000 | | | hours |
| PHYSICAL SPECIFICATIONS | | | | | |
| Dimensions (L x W x H) | | 5.96 x 2.31 x 1.35 inches (151.45 x 58.8 x 34.2 mm) | | | |
| AC Inlet Connector (<i>See Note 1</i>) | | IEC-320-C14, C8, and C6 | | | |
| Weight | | 1.2 lbs (550g) | | | |
| SAFETY & EMC | | | | | |
| Safety Standards | | UL60601, 3 rd Edition, EN/IEC 60601, CE, CB | | | |
| Compliance | | RoHS, WEEE, CEC/Energy Star Level V | | | |

MODEL SELECTION TABLE


| Model Number ⁽¹⁾ | Input Voltage Range | Output Voltage ⁽²⁾ | Output Current | | Ripple & Noise ⁽³⁾ | Maximum Output Power | AC Inlet Type |
|-----------------------------|---------------------|-------------------------------|----------------|-------|-------------------------------|----------------------|---------------|
| | | | Min | Max | | | |
| DTEM1090 1 A | 100 ~ 240 VAC | 12 ~ 17 VDC | 0A | 7.5A | 350mVp-p | 90W | IEC-320-C14 |
| DTEM1090 1 B | | 18 ~ 24 VDC | 0A | 5.56A | 350mVp-p | 100W | |
| DTEM1090 1 C | | 12 ~ 17 VDC | 0A | 6.67A | 350mVp-p | 80W | |
| DTEM1090 1 D | | 18 ~ 24 VDC | 0A | 5.0A | 350mVp-p | 90W | |
| DTEM1090 1 E | | 12 ~ 17 VDC | 0A | 5.83A | 350mVp-p | 70W | |
| DTEM1090 1 F | | 18 ~ 24 VDC | 0A | 4.44A | 350mVp-p | 80W | |
| DTEM1090 2 A | 100 ~ 240 VAC | 12 ~ 17 VDC | 0A | 7.5A | 350mVp-p | 90W | IEC-320-C8 |
| DTEM1090 2 B | | 18 ~ 24 VDC | 0A | 5.56A | 350mVp-p | 100W | |
| DTEM1090 2 C | | 12 ~ 17 VDC | 0A | 6.67A | 350mVp-p | 80W | |
| DTEM1090 2 D | | 18 ~ 24 VDC | 0A | 5.0A | 350mVp-p | 90W | |
| DTEM1090 2 E | | 12 ~ 17 VDC | 0A | 5.83A | 350mVp-p | 70W | |
| DTEM1090 2 F | | 18 ~ 24 VDC | 0A | 4.44A | 350mVp-p | 80W | |
| DTEM1090 3 A | 100 ~ 240 VAC | 12 ~ 17 VDC | 0A | 7.5A | 350mVp-p | 90W | IEC-320-C6 |
| DTEM1090 3 B | | 18 ~ 24 VDC | 0A | 5.56A | 350mVp-p | 100W | |
| DTEM1090 3 C | | 12 ~ 17 VDC | 0A | 6.67A | 350mVp-p | 80W | |
| DTEM1090 3 D | | 18 ~ 24 VDC | 0A | 5.0A | 350mVp-p | 90W | |
| DTEM1090 3 E | | 12 ~ 17 VDC | 0A | 5.83A | 350mVp-p | 70W | |
| DTEM1090 3 F | | 18 ~ 24 VDC | 0A | 4.44A | 350mVp-p | 80W | |

NOTES

1. The number in **red** represents the type of AC inlet connector: “**1**” for IEC-320-C14 type, “**2**” for IEC-320-C8 type, and “**3**” for IEC-320-C6 type.
2. The output voltage is specified as a range (Ex: 18~24VDC); the customer must specify what they want the voltage set at.
3. Ripple and Noise is measured at nominal line and full load with 20MHz limited bandwidth and a 0.1µF ceramic and 47µF aluminum capacitors in parallel on the output.
4. Optional output connectors are available. Please call factory for ordering details.

MECHANICAL DRAWING

Unit: inches (mm)

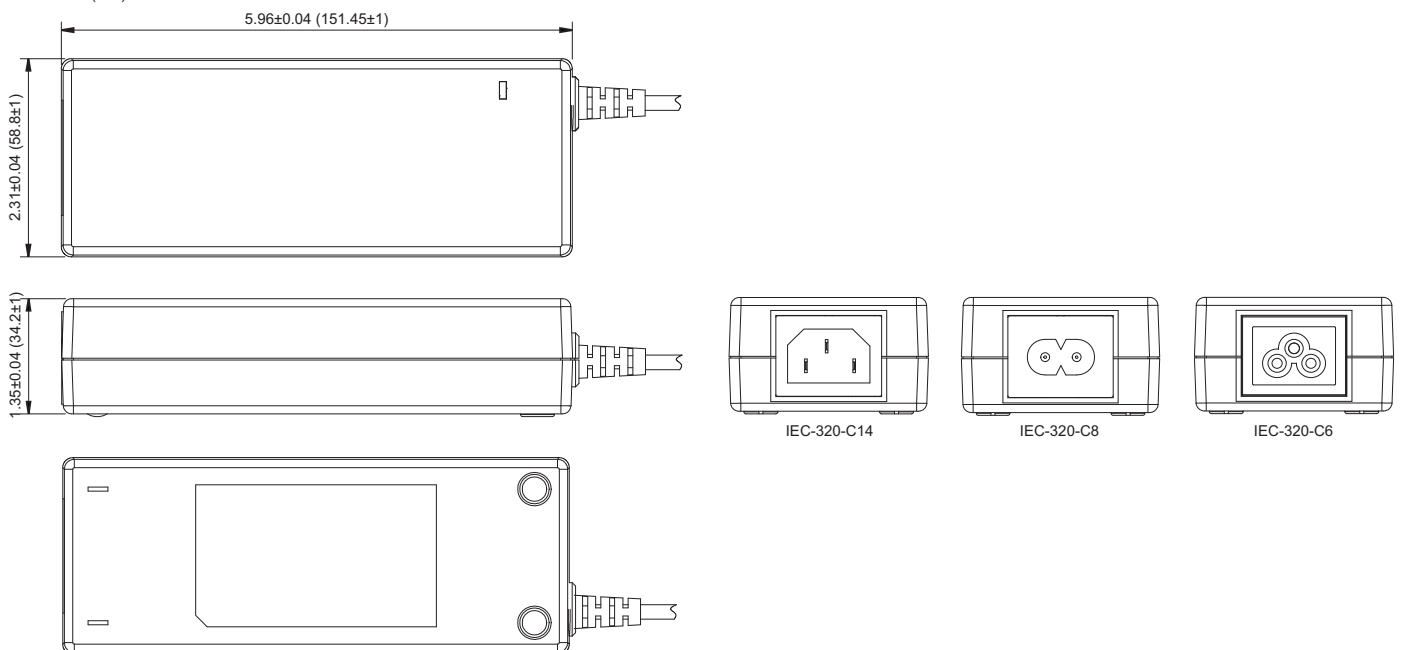

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001-2008 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

| | |
|-------------------|--|
| <u>Phone:</u> | ☎ (603)778-2300 |
| <u>Toll Free:</u> | ☎ (888)587-9255 |
| <u>Fax:</u> | ☎ (603)778-9797 |
| <u>E-mail:</u> | sales@wallindustries.com |
| <u>Web:</u> | www.wallindustries.com |
| <u>Address:</u> | 5 Watson Brook Rd. Exeter, NH 03833 |