

## Features

- Wide 2 : 1 Input Voltage Range(9~18V,18~36V,36~75V)
- High Efficiency up to 91%
- Remote On/Off
- Input / Output Isolation Voltage: 1.5kVdc
- Operating Temperature Range: -40°C to +85°C
- Output Short Circuit Protection:  
Hiccup, continuous & Auto Recovery
- Over Temperature Protection
- Shielded Metal Case with Insulated Baseplate
- Customer Design Available
- Optional Heat-sink



### Description

The BUC30 Series are isolated 30W DC/DC converters. Designed with highly efficiency, allow the operating temperature range of these units to be -40°C to +85°C (with derating) in a 50.8×25.4×10.2mm shielded metal case. Further features include wide 2 : 1 input voltage range, remote on/off control, trimmable output, short-circuit protection, over voltage protection and over temperature protection.

### Applications

These converters are well suitable for battery operated equipment, measurement equipment, telecom, wireless network, Industry control system, everywhere where isolated, tightly regulated voltages and compact size are required.

## Technical Specification

All specifications are typical at nominal input, full load and 25°C unless otherwise stated.

| Model Number | Input Voltage Range     | Output Voltage (Vdc) | Output Current (mA)      |            | Input Current (mA) |           | Eff. <sup>(2)</sup> (%) | Capacitive Load, max. <sup>(3)</sup> (uF) |
|--------------|-------------------------|----------------------|--------------------------|------------|--------------------|-----------|-------------------------|---|
|              |                         |                      | Min. Load <sup>(1)</sup> | Full. Load | No Load            | Full Load |                         |   |
| BUC30-12S7   | 9~18V<br>Nominal:12Vdc  | 1.5                  | 0                        | 8500       | 85                 | 1476      | 78                      | 56000                                     |
| BUC30-12S9   |                         | 2.5                  | 0                        | 8000       | 75                 | 2137      | 82                      | 47000                                     |
| BUC30-12S0   |                         | 3.3                  | 0                        | 7500       | 100                | 2611      | 83                      | 47000                                     |
| BUC30-12S1   |                         | 5.1                  | 0                        | 6000       | 150                | 3148      | 85                      | 33000                                     |
| BUC30-12S2   |                         | 12                   | 50                       | 2500       | 70                 | 3012      | 87                      | 4700                                      |
| BUC30-12S3   |                         | 15                   | 150                      | 2000       | 30                 | 3012      | 87                      | 3300                                      |
| BUC30-12D1   |                         | ±5                   | 0                        | ±3000      | 130                | 3012      | 87                      | 10000                                     |
| BUC30-12D2   |                         | ±12                  | 20                       | ±1250      | 120                | 3012      | 87                      | 2200                                      |
| BUC30-12D3   |                         | ±15                  | 100                      | ±1000      | 100                | 2976      | 88                      | 1800                                      |
| BUC30-24S7   | 18~36V<br>Nominal:24Vdc | 1.5                  | 0                        | 8500       | 35                 | 699       | 80                      | 56000                                     |
| BUC30-24S9   |                         | 2.5                  | 0                        | 8000       | 35                 | 1029      | 85                      | 47000                                     |
| BUC30-24S0   |                         | 3.3                  | 0                        | 7500       | 40                 | 1242      | 87                      | 47000                                     |
| BUC30-24S1   |                         | 5.1                  | 0                        | 6000       | 50                 | 1500      | 89                      | 33000                                     |
| BUC30-24S2   |                         | 12                   | 50                       | 2500       | 85                 | 1453      | 90                      | 4700                                      |
| BUC30-24S3   |                         | 15                   | 20                       | 2000       | 80                 | 1453      | 90                      | 3300                                      |
| BUC30-24D1   |                         | ±5                   | 0                        | ±3000      | 50                 | 1453      | 90                      | 10000                                     |
| BUC30-24D2   |                         | ±12                  | 50                       | ±1250      | 50                 | 1453      | 90                      | 2200                                      |
| BUC30-24D3   |                         | ±15                  | 0                        | ±1000      | 50                 | 1453      | 90                      | 1800                                      |
| BUC30-48S7   | 36~75V<br>Nominal:48Vdc | 1.5                  | 0                        | 8500       | 20                 | 345       | 81                      | 56000                                     |
| BUC30-48S9   |                         | 2.5                  | 0                        | 8000       | 15                 | 508       | 86                      | 47000                                     |
| BUC30-48S0   |                         | 3.3                  | 0                        | 7500       | 20                 | 614       | 88                      | 47000                                     |
| BUC30-48S1   |                         | 5.1                  | 0                        | 6000       | 25                 | 741       | 90                      | 33000                                     |
| BUC30-48S2   |                         | 12                   | 150                      | 2500       | 25                 | 727       | 90                      | 4700                                      |
| BUC30-48S3   |                         | 15                   | 20                       | 2000       | 25                 | 718       | 91                      | 3300                                      |
| BUC30-48D1   |                         | ±5                   | 0                        | ±3000      | 25                 | 727       | 90                      | 10000                                     |
| BUC30-48D2   |                         | ±12                  | 0                        | ±1250      | 25                 | 718       | 91                      | 2200                                      |
| BUC30-48D3   |                         | ±15                  | 0                        | ±1000      | 25                 | 718       | 91                      | 1800                                      |

**Input Specifications**

|  |   |   |
|--|---|---|
| Input voltage                            | 12V nominal input                       | 9-18Vdc                                   |
|  | 24V nominal input                       | 18-36Vdc                                  |
|  | 48V nominal input                       | 36-75Vdc                                  |
| Input filter                             |   | Pi type                                   |
| Input surge voltage<br>(100ms max.)      | 12V input                               | 25Vdc                                     |
|  | 24V input                               | 50Vdc                                     |
|  | 48V input                               | 100Vdc                                    |
| Input reflected ripple current           | Nominal Vin and full load               | 120mA <sub>p-p</sub> typ.                 |
| Start up time                            | Nominal Vin and constant resistive load | 80ms typ.                                 |
| Remote ON/OFF                            | Converter: ON                           | Open or $3.5V < V_r < 12V$                |
|  | Converter: OFF                          | Short <sup>(4)</sup> or $0V < V_r < 0.7V$ |
| Sourcing current of remote control pin   | Nominal Vin                             | < 0.2 mA                                  |
| Idle input current (at Remote OFF state) | Nominal Vin                             | < 15 mA                                   |

**Environmental Specifications**

|                               |                                |
|-------------------------------|--------------------------------|
| Operating ambient temperature | -40°C to +85°C (with derating) |
| Maximum case temperature      | +100°C                         |
| Storage temperature range     | -55°C to +105°C                |
| Relative humidity             | 95% RH max.                    |
| Temperature coefficient       | ±0.02% / °C max.               |

**Output Specifications**

|  |                                       |   |       |
|--|---------------------------------------|---|-------|
| Output power                                   | 30 Watts max.                         |   |       |
| Voltage accuracy                               | Full load and nominal Vin             | ±1%   |       |
| Minimum load                                   | See table                             |   |       |
| Line regulation                                | LL to HL at full load                 | ±0.2%   |       |
| Load Regulation                                | 25% load to full load                 | Single  | ±0.8% |
|  | Balanced load                         | Dual  | ±0.5% |
|  | Unbalanced load 25% to 100% full load |   | ±3%   |
| Ripple and Noise                               | 20MHz bandwidth                       | 85mV <sub>p-p</sub> max.                          |       |
|  | (Measured with a 1uF/50V MLCC)        | (120mV <sub>p-p</sub> for 12/15V <sub>out</sub> ) |       |
| Over voltage protection<br>(Zener Diode Clamp) | 1.5V <sub>out</sub> models            | 3V  |       |
|  | 2.5V <sub>out</sub> models            | 3.6V  |       |
|  | 3.3V <sub>out</sub> models            | 3.9V  |       |
|  | 5V <sub>out</sub> models              | 6.2V  |       |
|  | 12V <sub>out</sub> models             | 15V   |       |
| 15V <sub>out</sub> models                      | 18V                                   |   |       |
| Capacitive load                                | See table                             |   |       |
| Over load protection                           | % of full load at nominal input       | 110% min.   |       |
| Thermal shutdown                               | 115°C typ.                            |   |       |

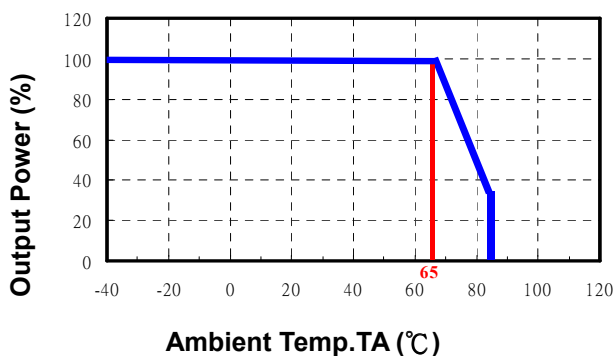
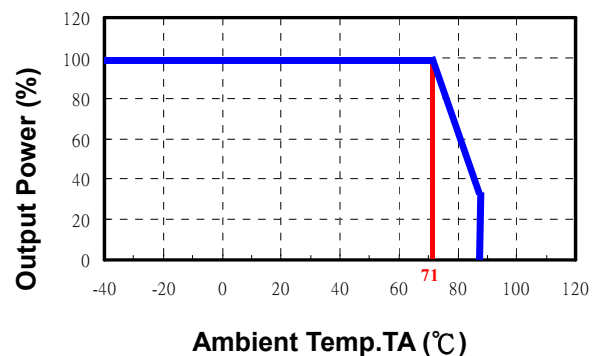
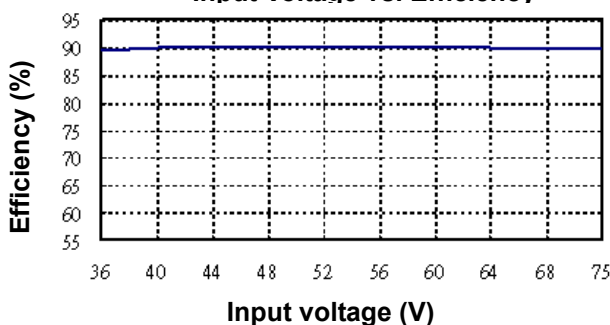
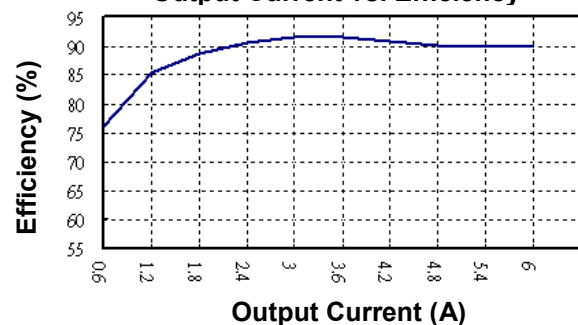
|                                  |                                   |  |
|----------------------------------|-----------------------------------|--|
| Short circuit protection         | Hiccup, continuous(Auto Recovery) |  |
| Transient response settling time | 50% load step change              | 400 $\mu$ s typ<br>(1.7ms for 1.5/2.5/3.3Vout)                 |
| Transient response over shoot    | di/dt=0.8A/ $\mu$ s               | $\leq \pm 5\%$ of Vo<br>( $\leq \pm 10\%$ for 1.5/2.5/3.3Vout) |

**General Specifications**

|                              |                 |                                   |
|------------------------------|-----------------|-----------------------------------|
| Efficiency                   | Nominal input   | See table                         |
| Isolation voltage            | Input to output | 1500Vdc                           |
| Isolation resistance         | 500Vdc          | 10 <sup>9</sup> Ohms min.         |
| Isolation capacitance        |                 | 1200pF typ.                       |
| Switching frequency          |                 | 300kHz typ.                       |
| Reliability, calculated MTBF |                 | 1.06 $\times$ 10 <sup>6</sup> Hrs |

**Physical Specifications**

|                  |   |
|------------------|---|
| Case material    | Nickel-coated copper  |
| Base material    | Non-conductive black plastic  |
| Potting material | Silicon rubber (UL94 V-0)   |
| Dimensions       | 2.0 $\times$ 1.0 $\times$ 0.4 Inch<br>(50.8 $\times$ 25.4 $\times$ 10.2 mm) |
| Weight           | 32.0g (1.13oz) typ.   |

**BUC30 Series  
Power Derating Curve without Heatsink<sup>(5)</sup>**

**BUC30 Series  
Power Derating Curve with Heatsink<sup>(5)</sup>**

**BUC30-48S1  
Input Voltage vs. Efficiency**

**BUC30-48S1  
Output Current vs. Efficiency**


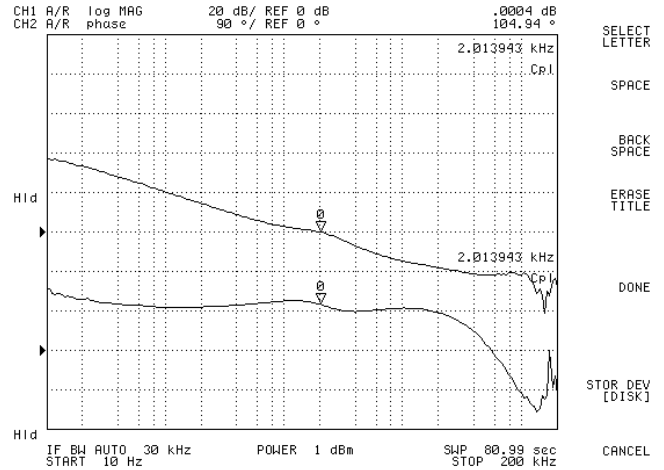
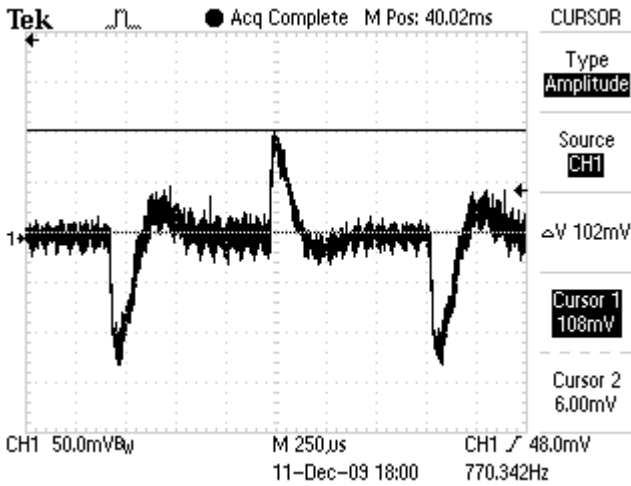


**BUC30-48S1**

**BUC30-48S1**

Transient Response at 50%~100% Max Load

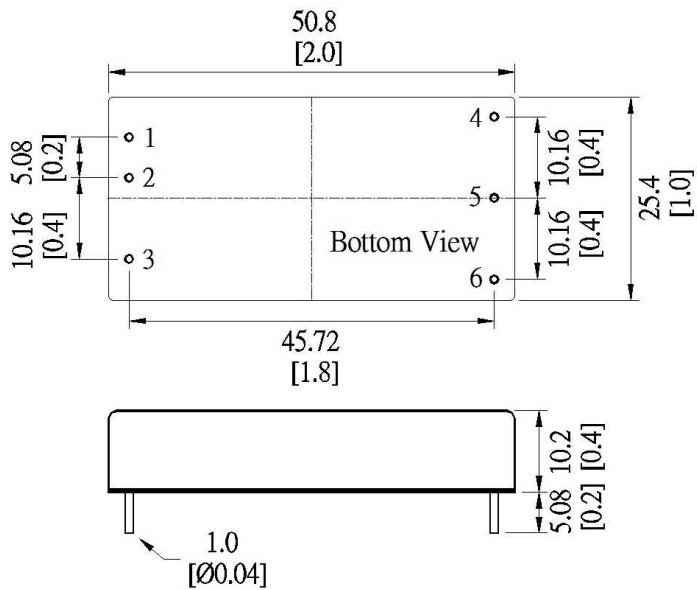
Loop Gain & Phase at Vi=48V, Full Load



**Note**

1. Io below this value will not damage these converters, however, they may not meet all listed specifications.
2. Typical value, tested at nominal input and full load.
3. For each output.
4. Short to -Vin (Pin 2).
5. Based on BUC30-48S1.

**Mechanical Dimensions**



| Pin Assignment |               |        |
|----------------|---------------|--------|
| Pin            | Single        | Dual   |
| 1              | +Vin          | +Vin   |
| 2              | -Vin          | -Vin   |
| 3              | Remote On/Off |        |
| 4              | +Vout         | +Vout  |
| 5              | -Vout         | Common |
| 6              | Trim          | -Vout  |

Unit: mm [inch]  
Tolerance: ±0.5 [0.02]

**Heat-sink (Option)**

Material: Aluminum

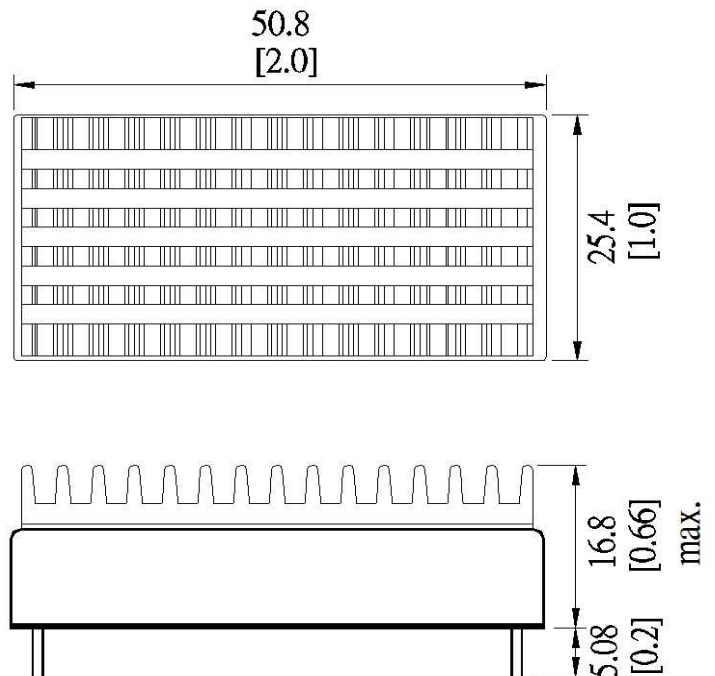
Weight: 10g (0.35oz)

**Note:**

The product label on converter has to be removed before mounting the heat-sink.

For volume orders, converters will be supplied with heat-sink already mounted. Please contact factory for quotation.

Separate heat-sinks are only available for prototypes and small quantity orders.



Specifications subject to change without notice.