

SHINDENGEN

Schottky Rectifiers (SBD)

Single

DE5S6M

60V 5A


FEATURES

- SMT
- $T_j = 150^\circ\text{C}$
- P_{RRSM} avalanche guaranteed
- High current capacity with Small Package

APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

OUTLINE DIMENSIONS

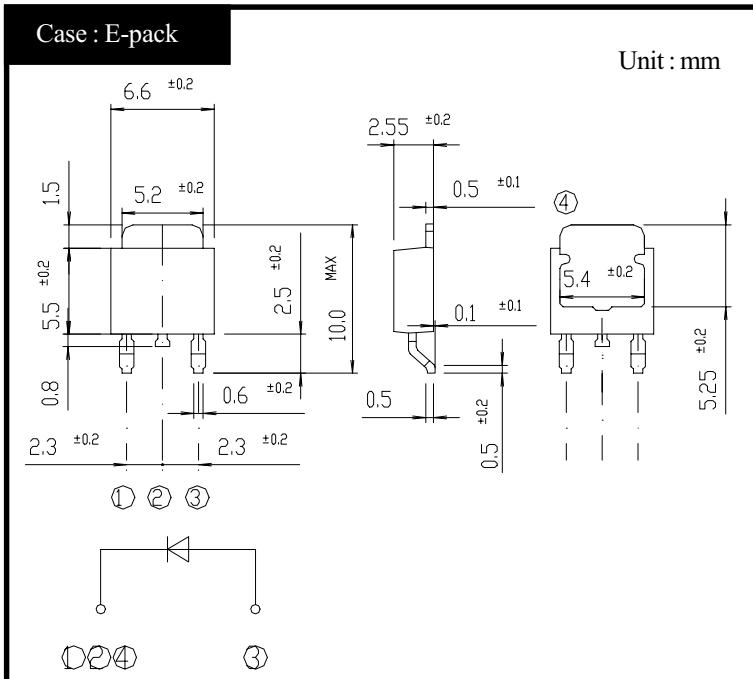

RATINGS

● Absolute Maximum Ratings (If not specified $T_c=25^\circ\text{C}$)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		-40 ~ 150	$^\circ\text{C}$
Operating Junction Temperature	T_j		150	$^\circ\text{C}$
Maximum Reverse Voltage	V_{RM}		60	V
Repetitive Peak Surge Reverse Voltage	V_{RRSM}	Pulse width 0.5ms, duty1/40	65	V
Average Rectified Forward Current	I_o	50Hz sine wave, R-load, $T_c=96^\circ\text{C}$ On alumina substrate	5	A
		50Hz sine wave, R-load, $T_a=45^\circ\text{C}$ On glass-epoxy substrate	2.6	
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, $T_j=125^\circ\text{C}$	90	A
Repetitive Peak Surge Reverse Power	P_{RRSM}	Pulse width 10 μs , $T_j=25^\circ\text{C}$	330	W


● Electrical Characteristics (If not specified $T_c=25^\circ\text{C}$)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=5\text{A}$, Pulse measurement	Max.0.58	V
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement	Max.2.5	mA
Junction Capacitance	C_j	$f=1\text{MHz}$, $V_R=10\text{V}$	Typ.200	pF
Thermal Resistance	θ_{jc}	junction to case	Max.12	$^\circ\text{C}/\text{W}$
	θ_{ja}	junction to ambient	Max.55	

DE5S6M


Forward Voltage


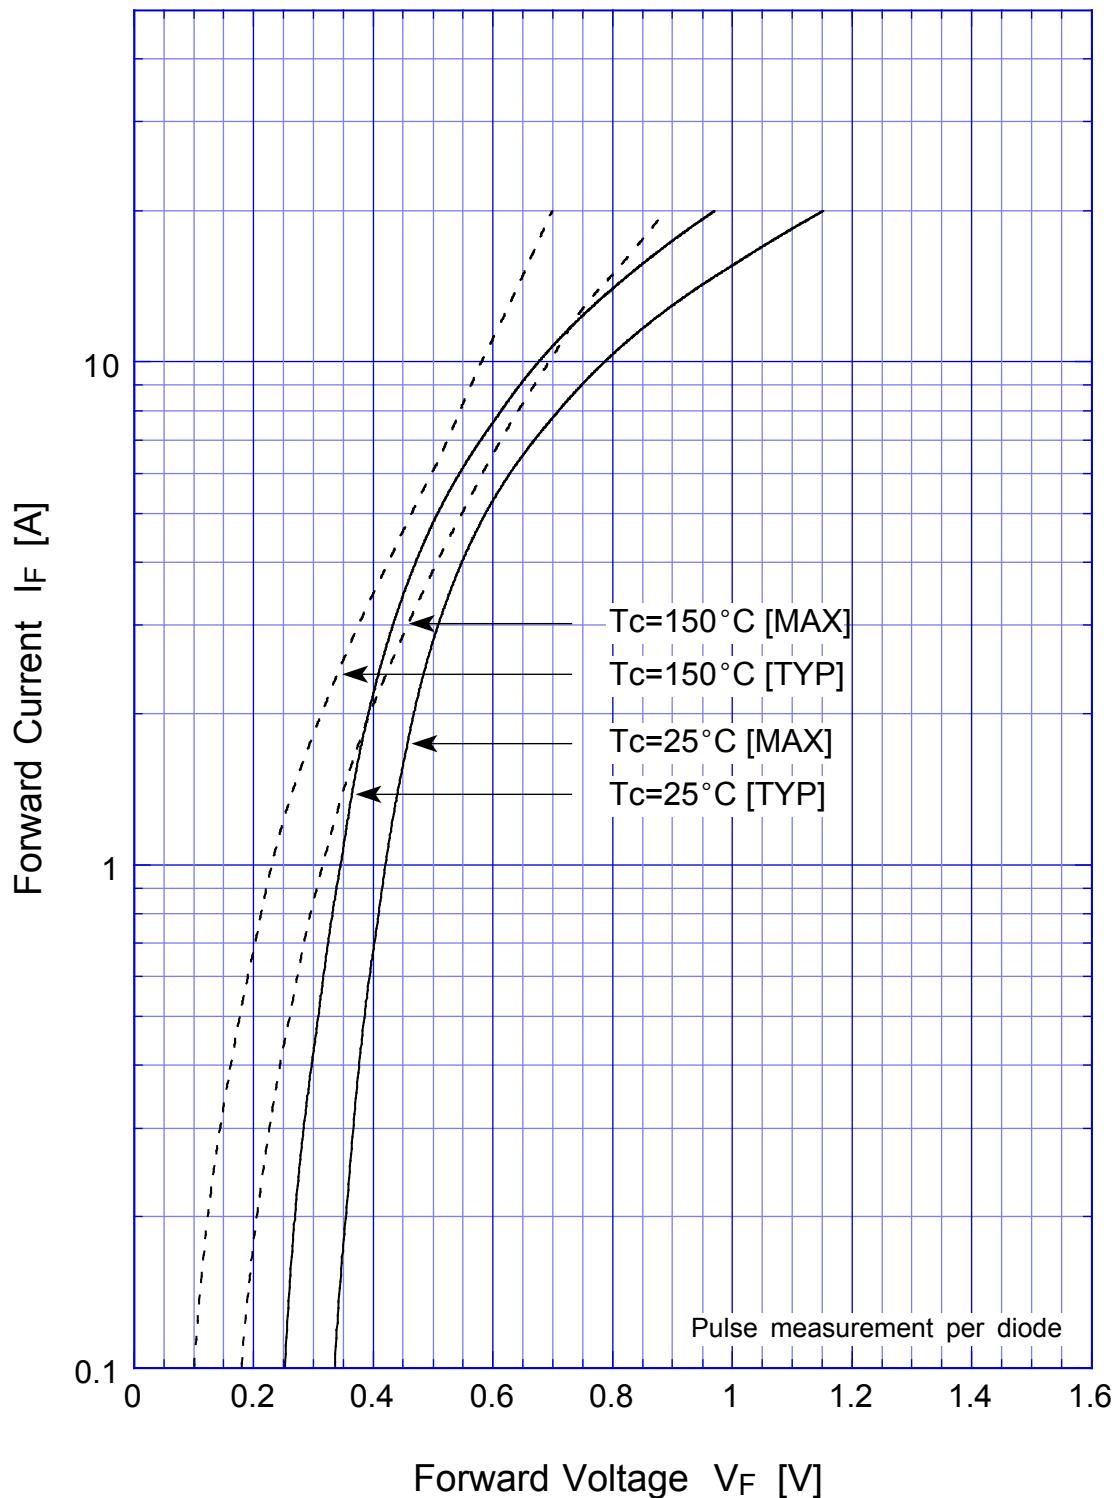


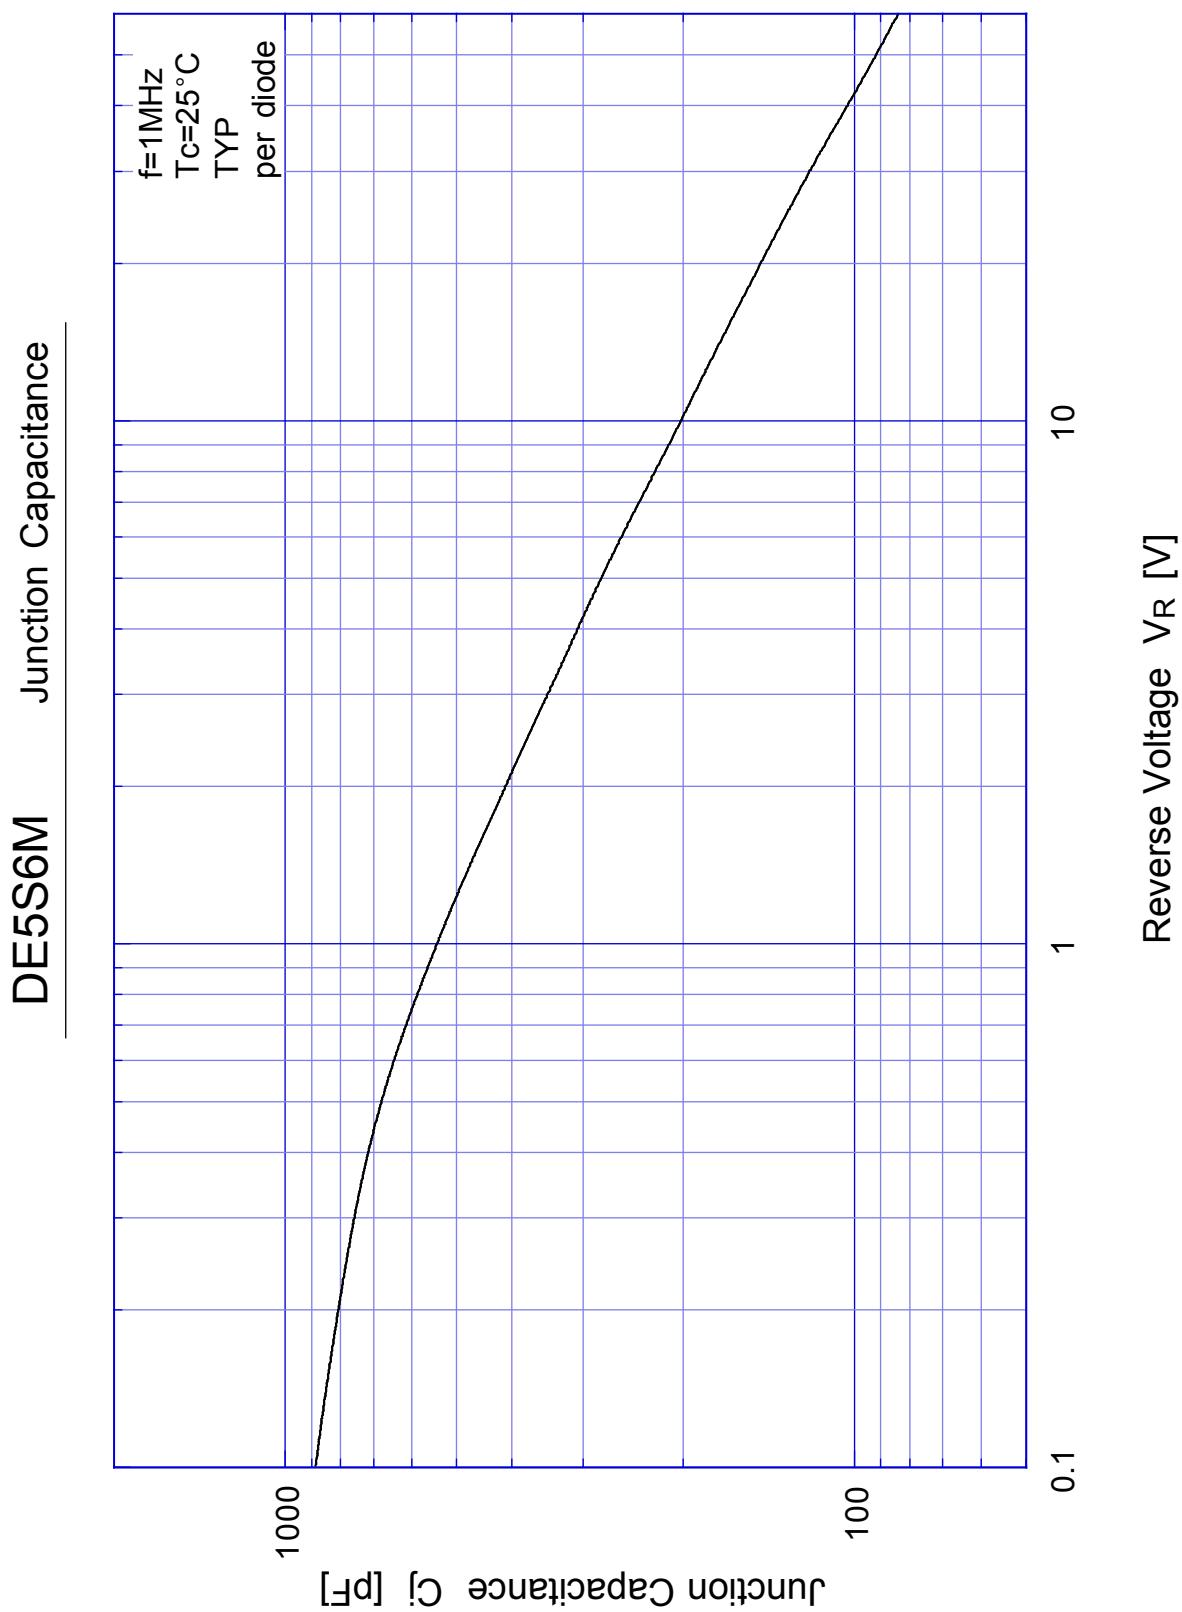



DE5S6M


Reverse Current

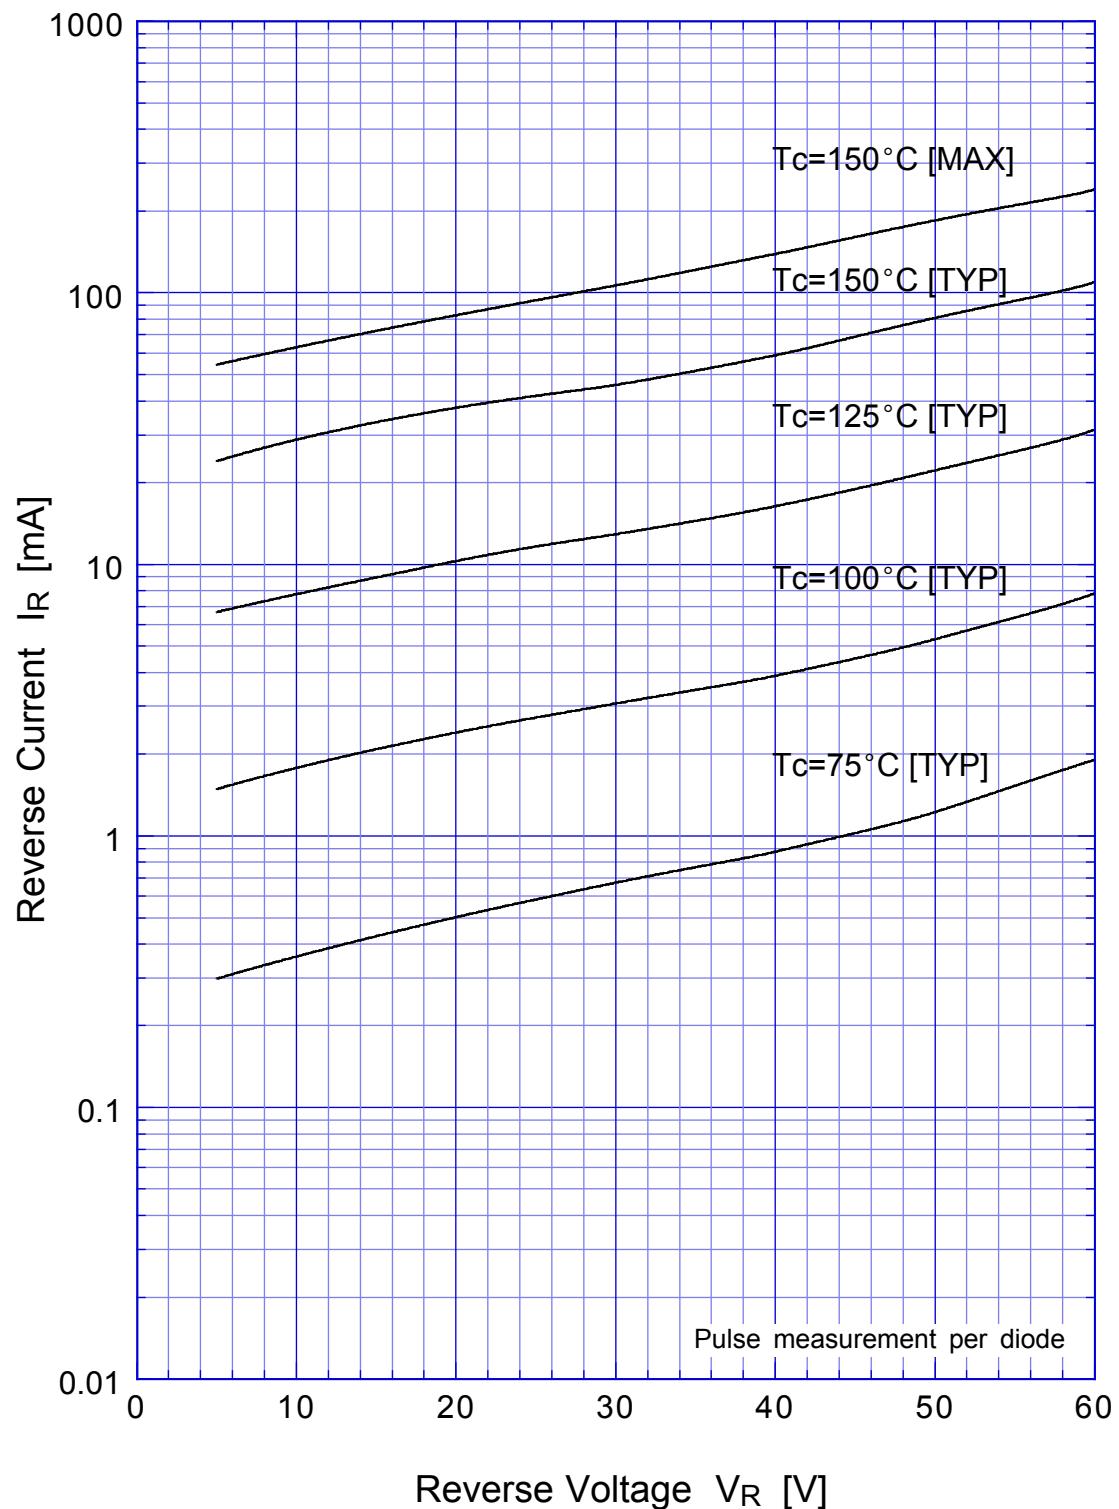

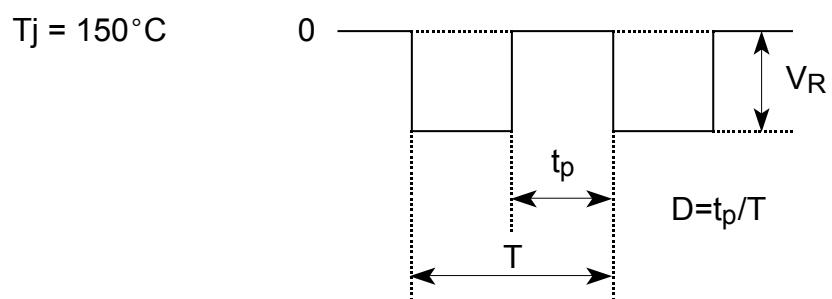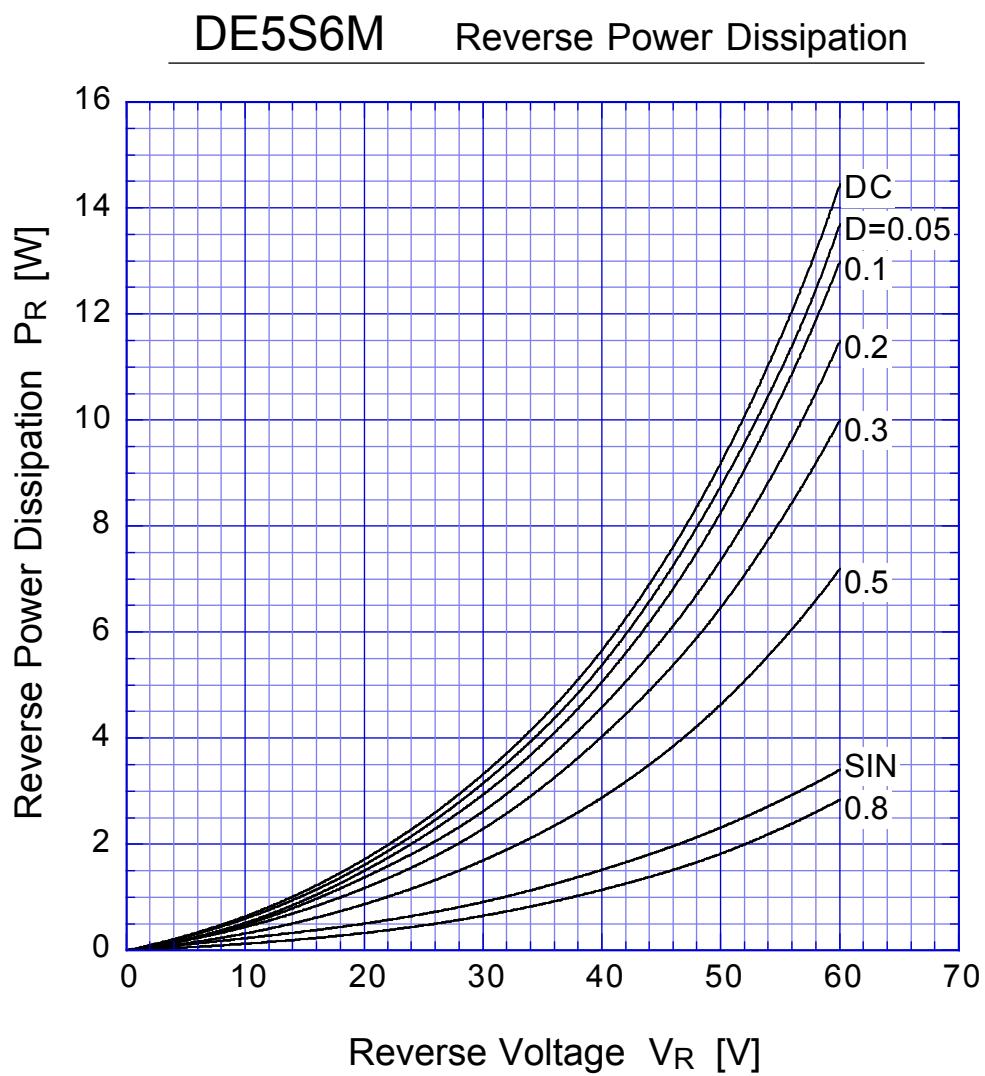




DE5S6M Forward Power Dissipation

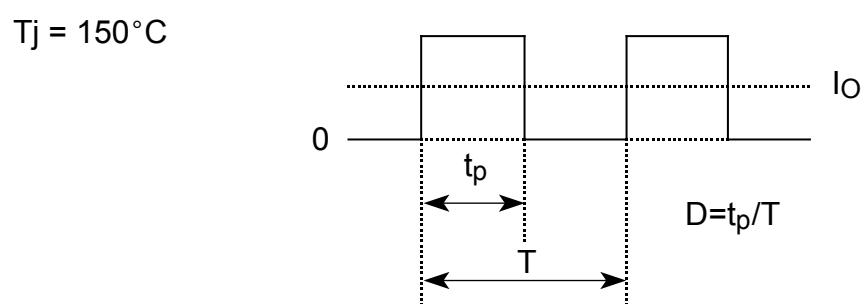
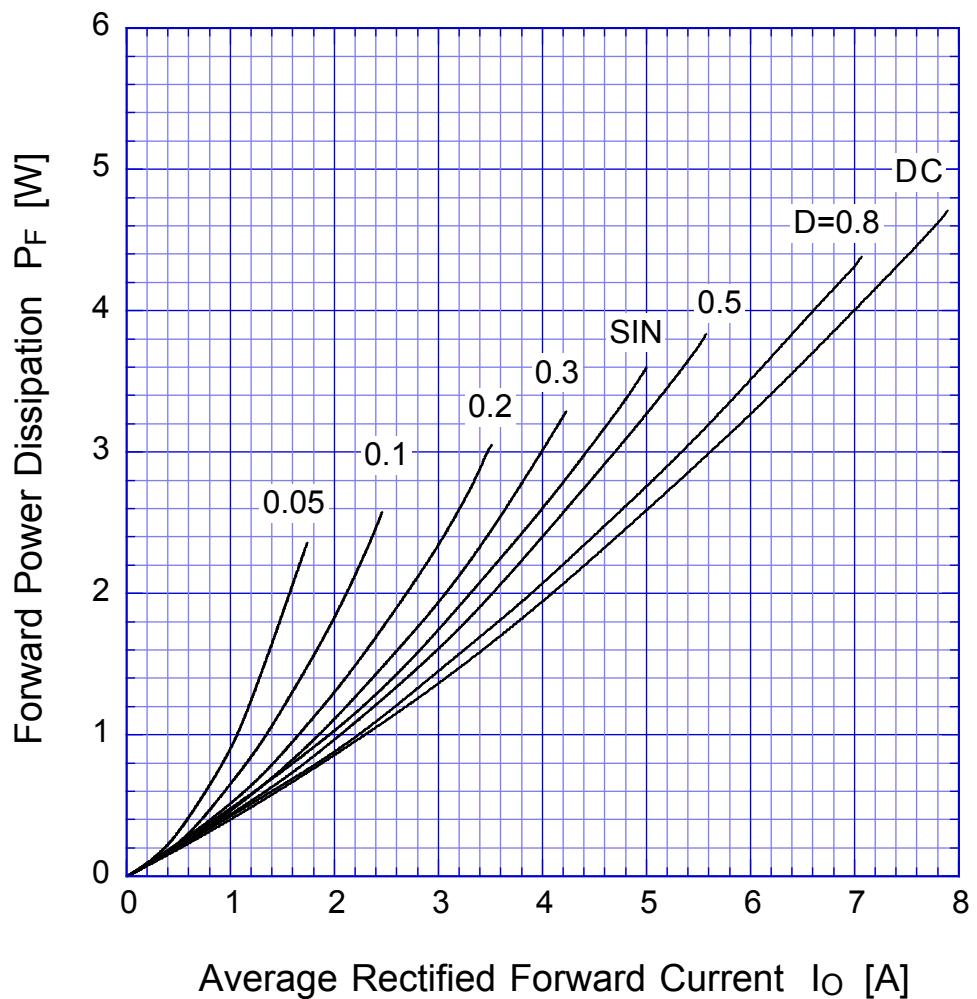


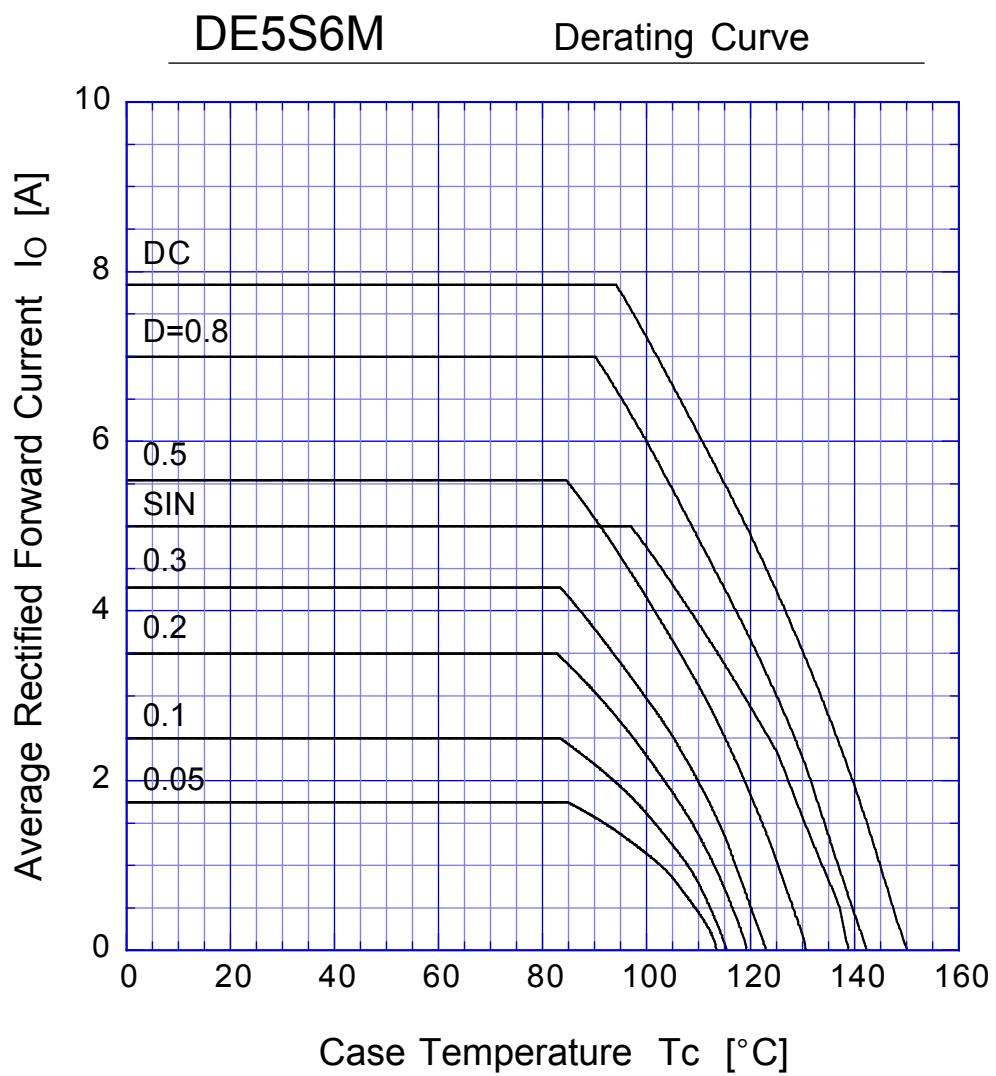

$V_R = 30V$

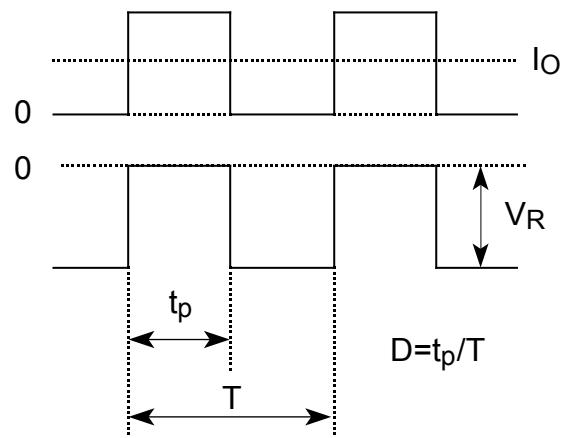


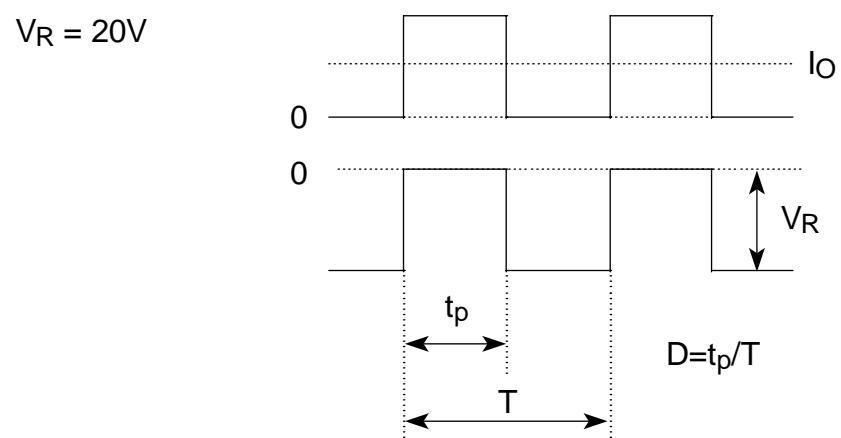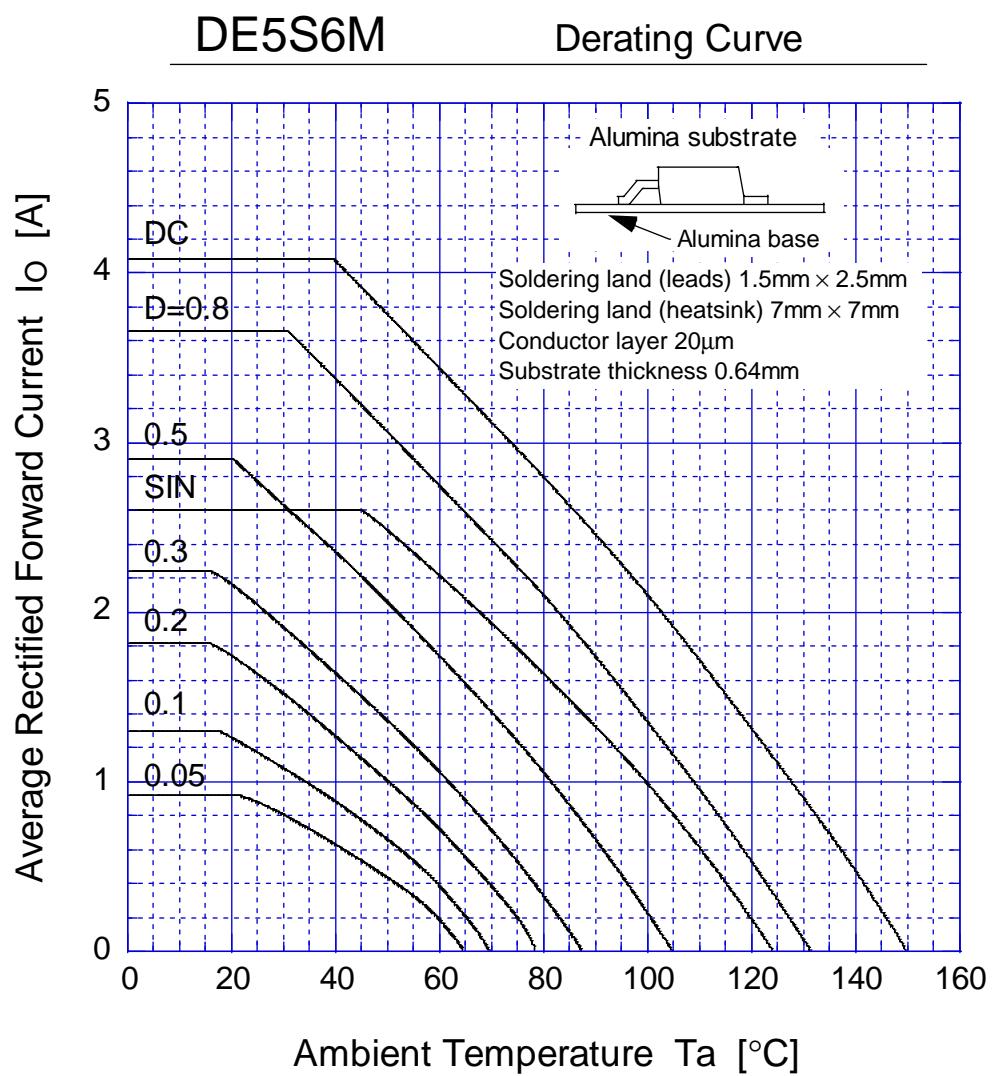

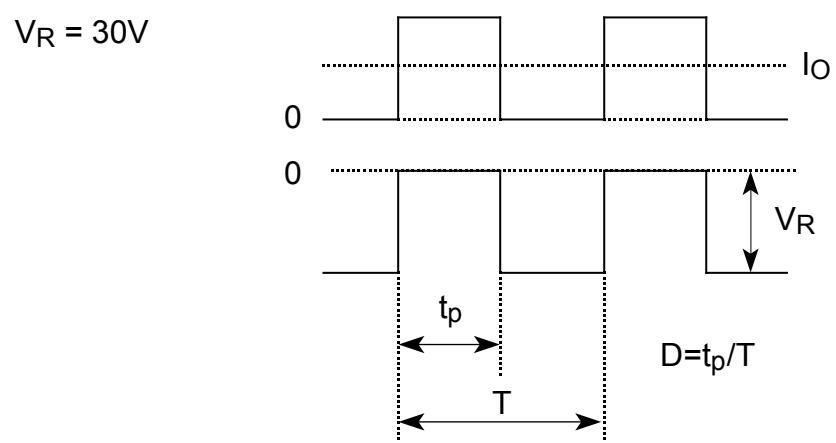
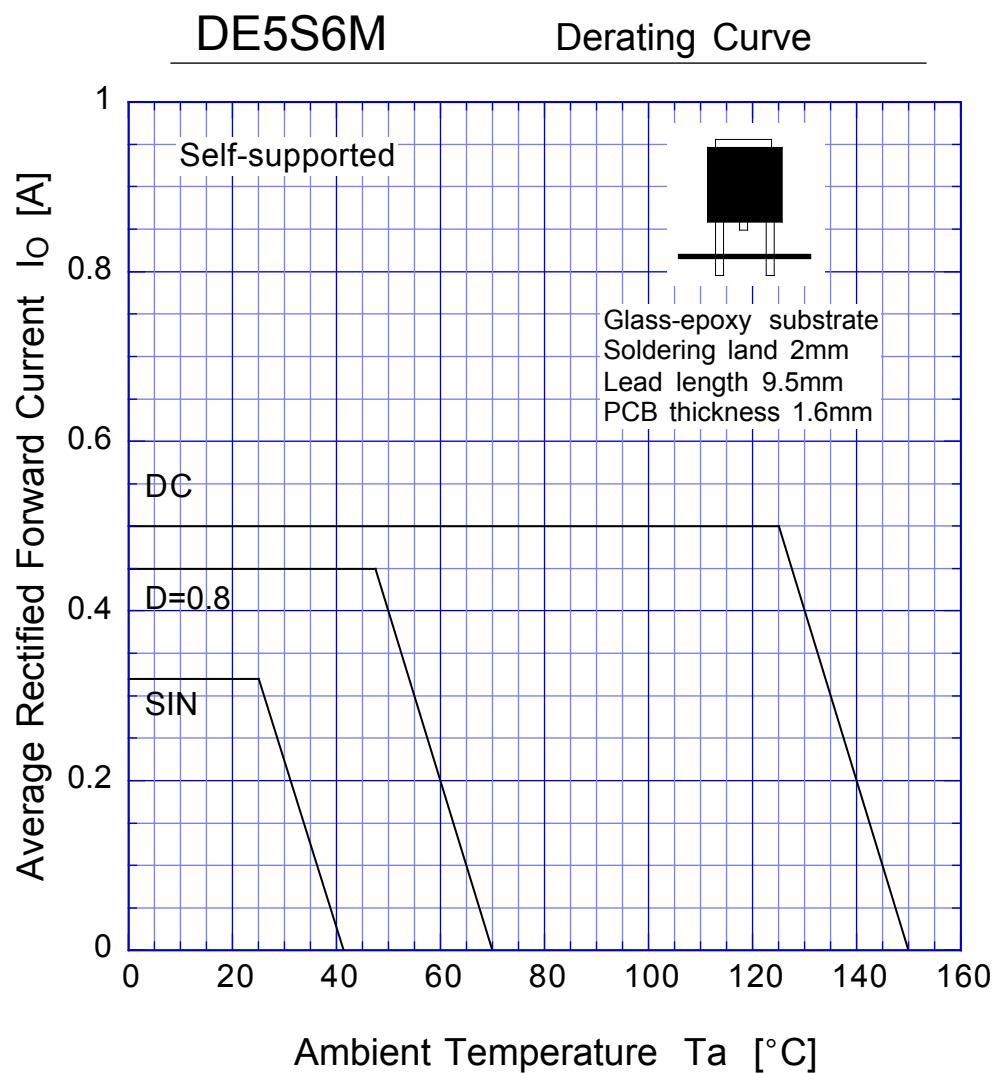


DE5S6M

Peak Surge Forward Capability

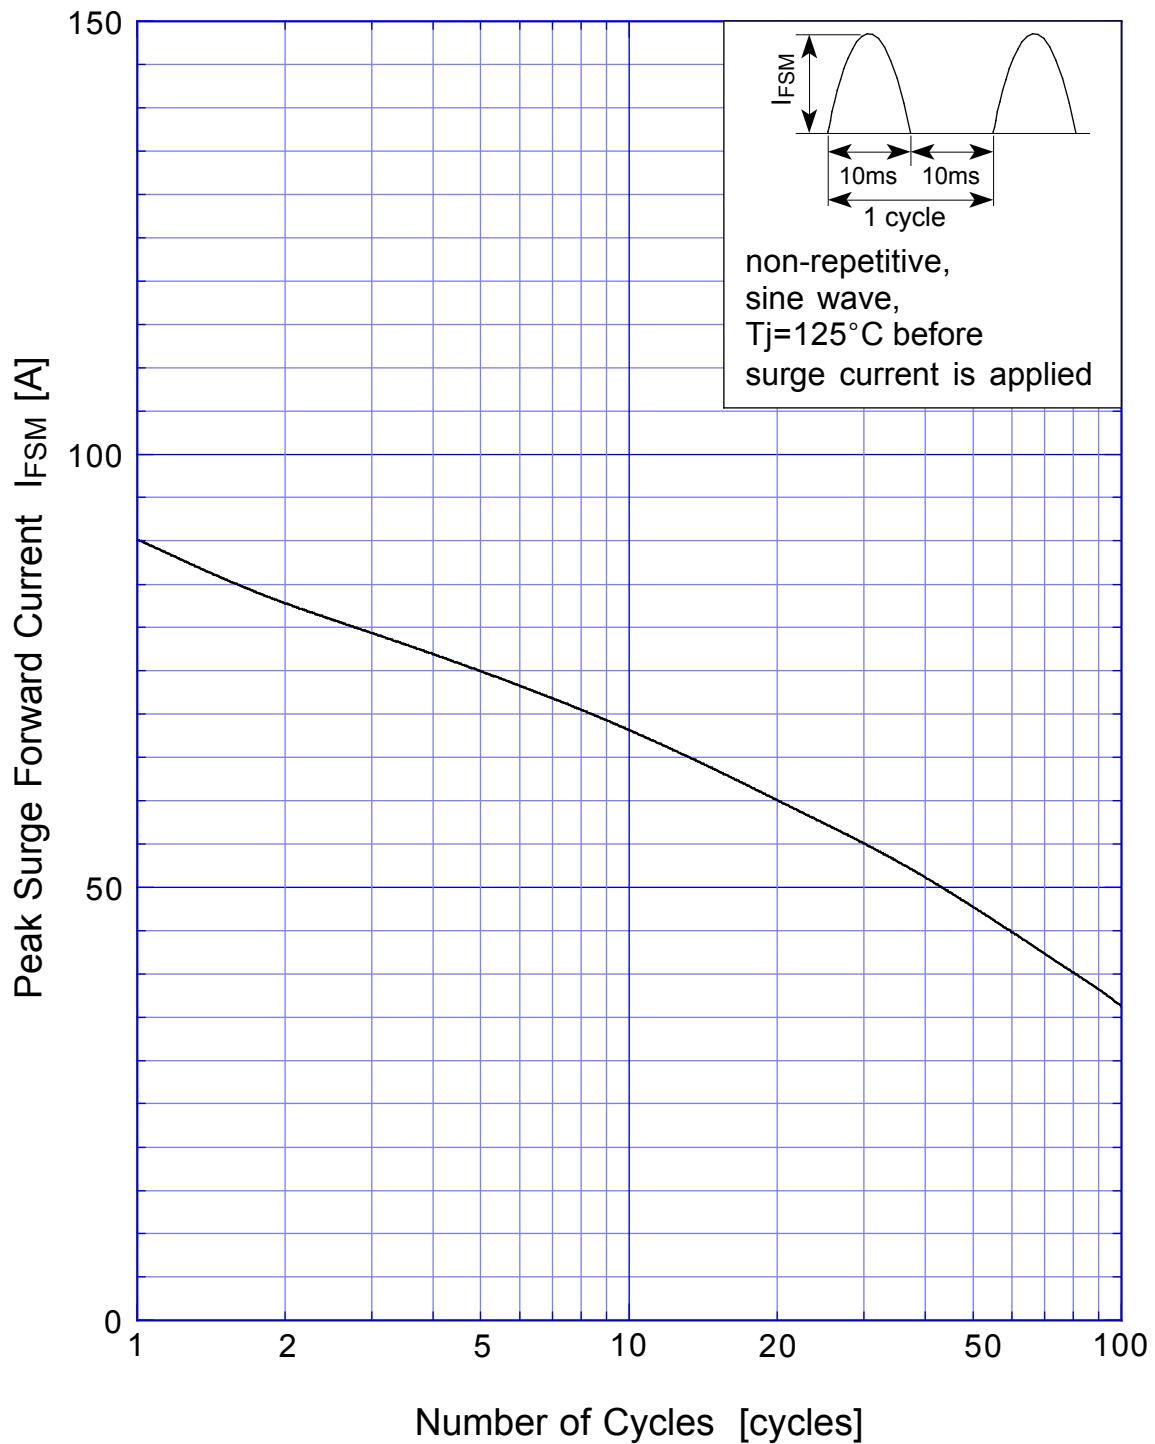

SBD Repetitive Surge Reverse Power Derating Curve

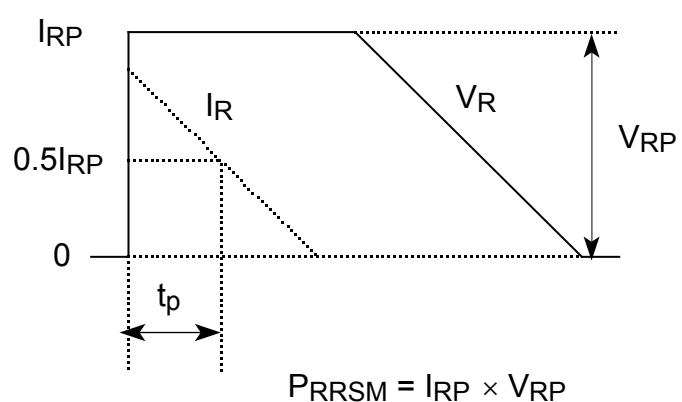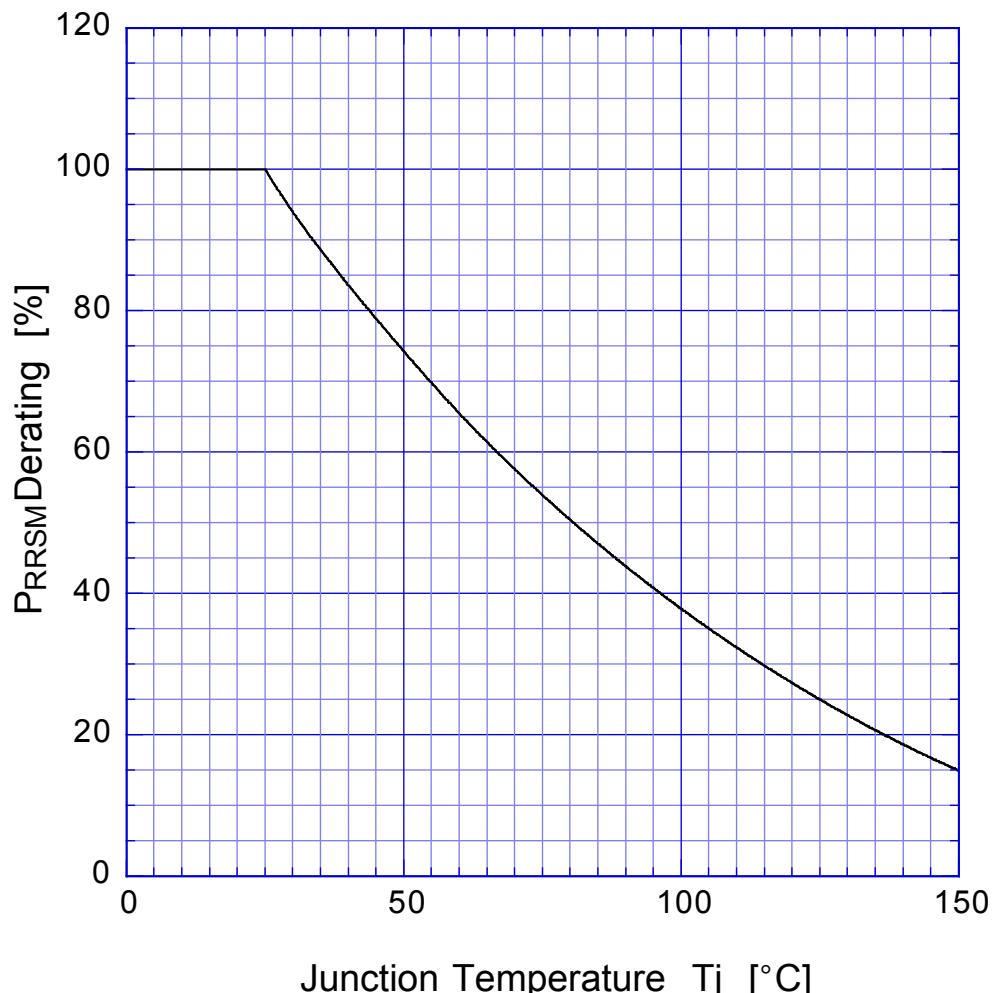

SBD Repetitive Surge Reverse Power Capability

