

### MLZ2012N6R8LT000









Applications	Commercial Grade
Feature	Shield Magnetic Shield  Multilayer Multilayer
- eature	Ferrite Core Ferrite Core
Series   Type	MLZ
Status	Production
Brand	TDK



Size		
Length(L)	2.00mm ±0.20mm	
Width(W)	1.25mm ±0.20mm	
Thickness(T)	0.85mm ±0.20mm	
Recommended Land Pattern (A)	0.80mm Nom.	
Recommended Land Pattern (B)	1.00mm Nom.	
Recommended Land Pattern (C)	1.20mm Nom.	

Electrical Characteristics		
Inductance	6.8μH ±20% at 2MHz	
Rated Current (L Change) [Typ.]		
Rated Current (L Change) [Max.]	110mA (50% Down)	
Rated Current (Temperature Rise) [Typ.]	550mA (20°C Rise)	
Rated Current (Temperature Rise) [Max.]	110mA (20°C Rise)	
DC Resistance [Typ.]	250mΩ	
DC Resistance [Max.]	325mΩ	
Self Resonant Frequency [Min.]		
Self Resonant Frequency [Typ.]		
Q [Min.]		
Q [Typ.]		

Other			
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C		
	Wave (Flow)		
Soldering Method	Reflow		
	Iron Soldering		
AEC-Q200	No		
Packing	Punched (Paper)Taping [180mm Reel]		
Package Quantity	4000pcs		
Whates are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.	0.01g		

#### MLZ2012N6R8LT000














## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

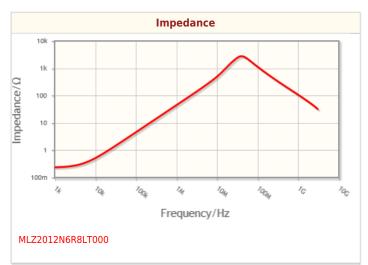

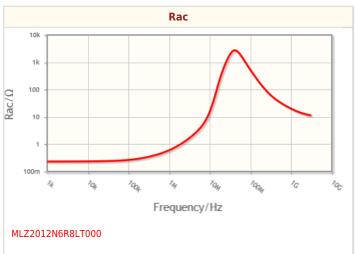

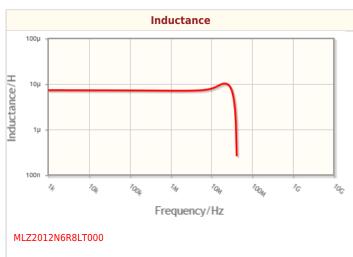

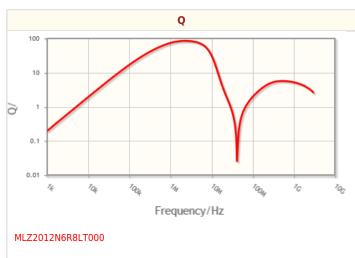

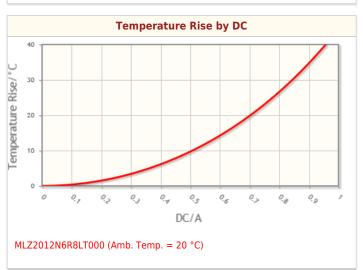

<sup>!</sup> Images are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.

### MLZ2012N6R8LT000










# **Associated Images**



<sup>!</sup> Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.