


# Olitech Electronics Co. Ltd

Email: info@olitech-elec.com Website: www.olitech-elec.com

## EM513 THRU EM520 GENERAL PURPOSE SILICON RECTIFIER

Reverse Voltage - 1600 to 2000 Volts Forward Current - 1.0 Ampere

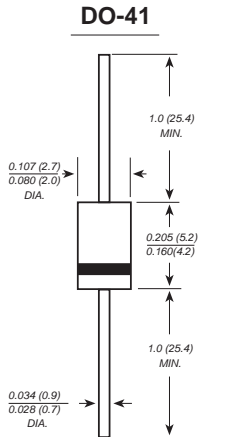

Dimensions in inches and (millimeters)

### FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Construction utilizes void-free molded plastic technique
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

### MECHANICAL DATA

**Case:** JEDEC DO-41 molded plastic body  
**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026  
**Polarity:** Color band denotes cathode end  
**Mounting Position:** Any  
**Weight:** 0.26 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	EM513	EM516	EM520	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	1600	1800	2000	VOLTS
Maximum RMS voltage	$V_{RMS}$	1120	1260	1400	VOLTS
Maximum DC blocking voltage	$V_{DC}$	1600	1800	2000	VOLTS
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=75^\circ\text{C}$	$I_{(AV)}$	1.0			Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	30.0			Amps
Maximum instantaneous forward voltage at 1.0A	$V_F$	1.1			Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	$I_R$	5.0 50.0			$\mu\text{A}$
Typical junction capacitance (NOTE 1)	$C_J$	15.0			pF
Typical thermal resistance (NOTE 2)	$R_{qJA}$	50.0			$^\circ\text{C/W}$
Operating junction and storage temperature range	$T_J, T_{STG}$	-65 to +175			$^\circ\text{C}$

**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.  
 2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

## RATINGS AND CHARACTERISTIC CURVES EM513 THRU EM520

