

LOC	DIST	REVISIONS			DATE	DWN	APVD
J		P	LTR	DESCRIPTION			
		B	REVISED	FJB0-0440-03	16DEC03	H.T	Y.Y





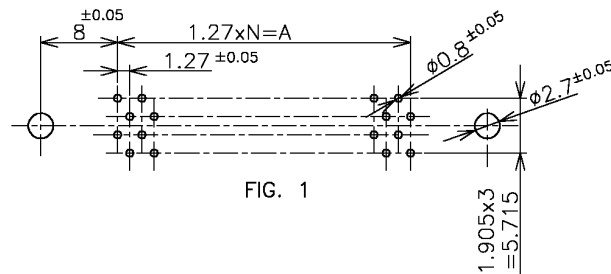



FIG. 1


- 1 基板パターン寸法図はFIG.1に示す通り。 1 P.C BOARD HOLE LAY-OUT AS SHOWN FIG.1
 2 適用ねじはM2.5x0.45 のなべ小ねじ。 2 USED SCREW; M2.5x0.45 PANHEAD SCREW.
 3 かん合相手コネクタ: X-174340-X 3 CONNECTOR TO BE MATED; X-174340-X

CAP SHIELD MATERIAL; ZINC FINISH; NICKEL OVER COPPER
 キャップシールド 材質: 亜鉛ダイカスト 仕上: 銅下地/Niめっき
 POST CONT- PHOS BRONZE DUPLEX PLATED 0.0002 OR 0.00076 MIN. GOLD ON CONTACT AREA TIN ON SOLDER TINE AREA WITH ENTIRE CONT UNDERPLATED NICKEL
 ポストコンタクト 材質: 燐青銅 仕上: Ni下地、接触部: 0.0002 OR 0.00076 金めっき タイン部: すずめっき
 CAP HOUSING MATERIAL; PBT, BLACK
 キャップハウジング 材質: PBT樹脂、黒

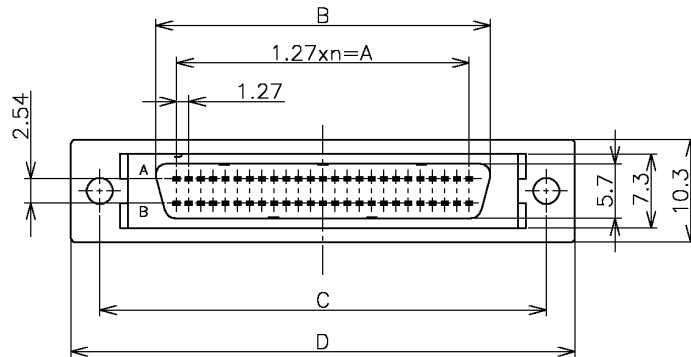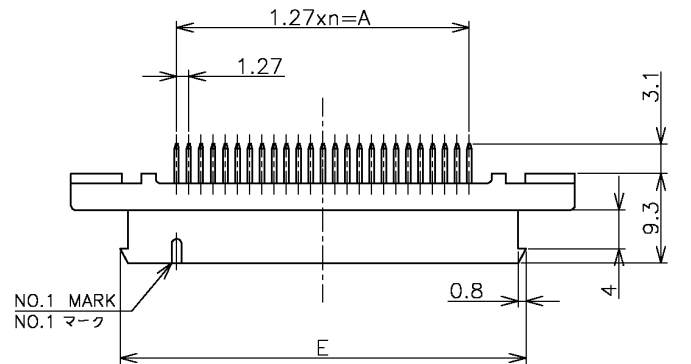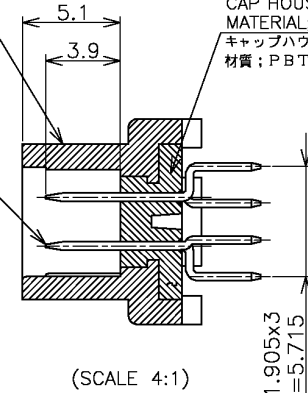

鉛フリー
LEAD FREE



	68	33	41.91	46.28	57.9	63.9	53.71	0.00076	2-174339-5	
GENERAL TOLERANCE 一般公差 10±: ±0.2 30± > 10: ±0.25 100± > 30: ±0.3 ANGLES: ±3°	50	24	30.48	34.85	46.5	52.5	42.28	MIN	2-174339-4	
	68	33	41.91	46.28	57.9	63.9	53.71	0.0002	174339-5	
	50	24	30.48	34.85	46.5	52.5	42.28	MIN	174339-4	
	POS	N	A	B	C	D	E	GOLD THK	PART NO.	
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN H.TAGUCHI 16DEC03	tyco Electronics			Tyco Electronics AMP K.K. Kawasaki, Japan			
DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK T.FUTATSUGI 16DEC03	NAME					
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± ±		APVD H.KODAMA 16DEC03	CAP HEADER (VERTICAL/M2.5) AMPLITE .050 SERIES II CONN. TYPE B					
				PRODUCT SPEC						
				APPLICATION SPEC						
MATERIAL SEE ABOVE	FINISH SEE ABOVE		WEIGHT		SIZE A3			CAGE CODE 00779	DRAWING NO C-174339	RESTRICTED
CUSTOMER DRAWING			SCALE 2:1			SHEET 1 OF 1			REV B	