
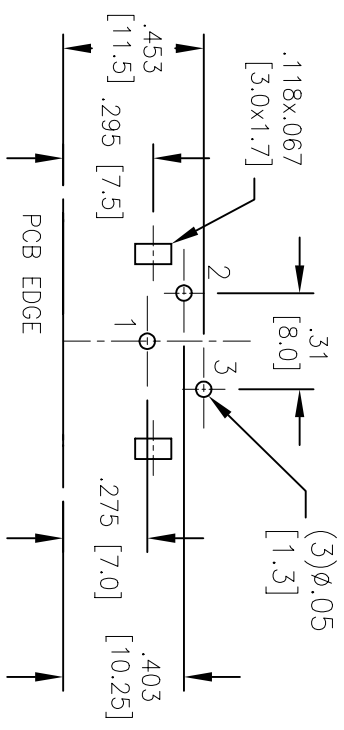



Rev	AWO #	Description	Date	Appr
-		RELEASED	8/6/04	

APPROVED: \_\_\_\_\_ TITLE: \_\_\_\_\_  
 DATE: \_\_\_\_\_

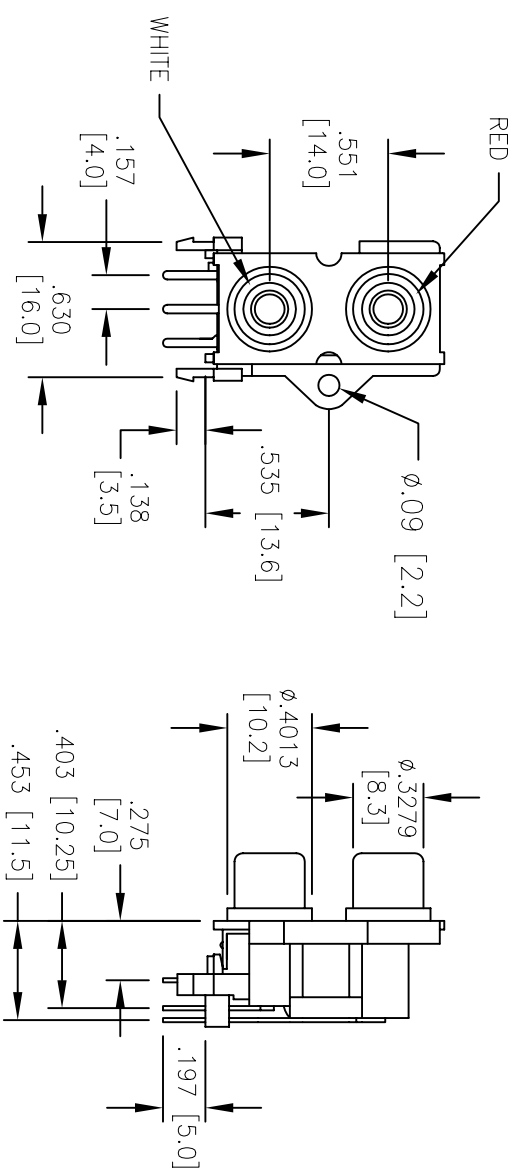

**SPECIFICATIONS:**

Material:

Insulator: PBT, glass reinforced thermoplastic, rated UL 94V-0

Insulator colors: Red, White, Black & Yellow

Bushing: Brass, Nickel plated

Contacts: Brass

Plating:

Tin or Silver over Copper underplate.

Electrical:

Operation voltage: 12V DC max

Current rating: 1 Amp max

Insulation resistance: 100 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature rating:

Operating temperature: -25°C to +85°C

Packaging:

Anti-ESD plastic bags

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES UNLESS NOTED	
INCHES	FRACTIONS
.XX	±.10
.XXX	±.020
.XXXX	±.015
.XXXXX	±.010
HOLES	
∅XX	±.10
∅XXX	±.015
∅XXXX	±.010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RCA JACK, RIGHT ANGLE, 2 PORT, PCB MOUNT TOP RED / BOTTOM WHITE

SIZE	PART NO.	REV.
X	RCA-8-4-RW	-
SCALE:	NIS	SHEET 1 OF 1