

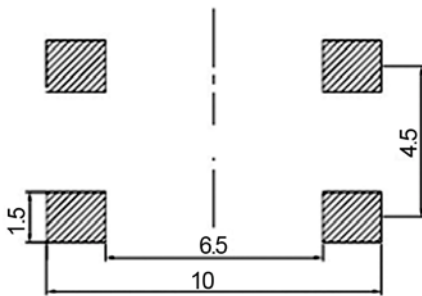




# TACT SWITCH

**Suntan®**

## TSS-RP-06XG

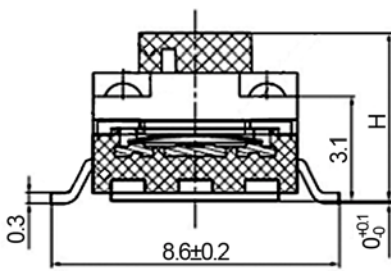

MODEL NO	H (mm)	Tape & Reel Option
TSS-RP-06XG	4.3	Yes
TSS-RP-06XA	5	Yes
TSS-RP-06XB	7	Yes
TSS-RP-06XE	9.5	Yes

CODE	OPERATING FORCE(gf)
X	160±50
Z	250±100

### SPECIFICATIONS

1. RATING:DC 12V 50mA
2. TRAVEL:0.30±0.1mm
3. CONTACT RESISTANCE 100mΩ MAX
4. LIFE: normal 50,000~100,000 times  
(over 100,000 times on request)

Note: Specification are subject to change without notice. For more detail and update, please visit our website.

**Suntan®** Technology Company Limited Website: [www.suntan.com.hk](http://www.suntan.com.hk) Email: [info@suntan.com.hk](mailto:info@suntan.com.hk) Tel: (852) 8202 8782 Fax: (852) 8208 6246