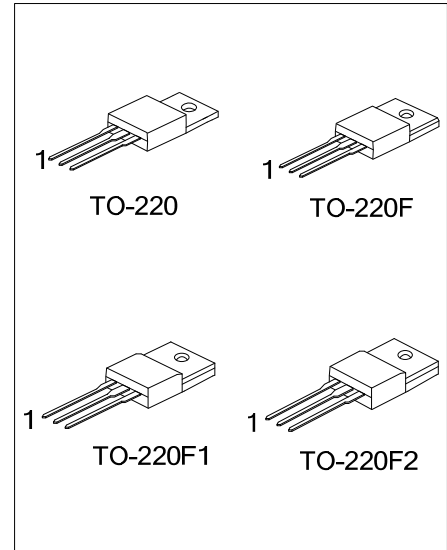



**9N50K-MT****Power MOSFET****9A, 500V N-CHANNEL
POWER MOSFET****DESCRIPTION**

The UTC **9N50K-MT** is an N-channel mode power MOSFET using UTC's advanced technology to provide customers planar stripe and DMOS technology. This technology allows a minimum on-state resistance, superior switching performance. It also can withstand high energy pulse in the avalanche and commutation mode.

The UTC **9N50K-MT** is generally applied in high efficiency switch mode power supplies, active power factor correction and electronic lamp ballasts based on half bridge topology.

**FEATURES**

- * $R_{DS(ON)} < 0.85\Omega$ @ $V_{GS} = 10\text{ V}$, $I_D = 4.5\text{ A}$
- * High Switching Speed
- * Improved dv/dt Capability
- * 100% Avalanche Tested


SYMBOL**ORDERING INFORMATION**

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
9N50KL-TA3-T	9N50KG-TA3-T	TO-220	G	D	S	Tube
9N50KL-TF3-T	9N50KG-TF3-T	TO-220F	G	D	S	Tube
9N50KL-TF1-T	9N50KG-TF1-T	TO-220F1	G	D	S	Tube
9N50KL-TF2-T	9N50KG-TF2-T	TO-220F2	G	D	S	Tube

Note: Pin Assignment: G: Gate D: Drain S: Source

9N50KL-TA3-T (1) Packing Type (2) Package Type (3) Green Package	(1) T: Tube (2) TA3: TO-220, TF3: TO-220F, TF1: TO-220F1, TF2: TO-220F2 (3) L: Lead Free, G: Halogen Free and Lead Free
--	--

■ MARKING

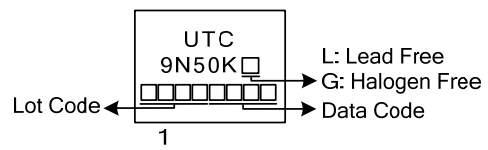

■ **ABSOLUTE MAXIMUM RATINGS** ($T_C=25^{\circ}\text{C}$, unless otherwise noted)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DSS}	500	V
Gate-Source Voltage		V_{GSS}	± 30	V
Drain Current	Continuous ($T_C=25^{\circ}\text{C}$)	I_D	9 (Note 5)	A
	Pulsed (Note 2)	I_{DM}	36 (Note 5)	A
Avalanche Energy	Single Pulsed (Note 3)	E_{AS}	360	mJ
Peak Diode Recovery dv/dt (Note 4)		dv/dt	4.5	V/ns
Power Dissipation	TO-220	P_D	140	W
	TO-220F/TO-220F1		47	W
	TO-220F2			
Derate above 25°C	TO-220	P_D	1.1	W/ $^{\circ}\text{C}$
	TO-220F/TO-220F1		0.38	W/ $^{\circ}\text{C}$
	TO-220F2			
Junction Temperature		T_J	+150	$^{\circ}\text{C}$
Storage Temperature		T_{STG}	-55~+150	$^{\circ}\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating: Pulse width limited by maximum junction temperature

3. $L = 8\text{mH}$, $I_{AS} = 9\text{A}$, $V_{DD} = 50\text{V}$, $R_G = 25\Omega$, Starting $T_J = 25^{\circ}\text{C}$

4. $I_{SD} \leq 9\text{A}$, $di/dt \leq 200\text{A}/\mu\text{s}$, $V_{DD} \leq BV_{DSS}$, Starting $T_J = 25^{\circ}\text{C}$

5. Drain current limited by maximum junction temperature

■ **THERMAL DATA**

PARAMETER		SYMBOL	RATING	UNIT
Junction to Ambient		θ_{JA}	62.5	$^{\circ}\text{C}/\text{W}$
Junction to Case	TO-220	θ_{JC}	0.8	$^{\circ}\text{C}/\text{W}$
	TO-220F/TO-220F1		2.62	$^{\circ}\text{C}/\text{W}$
	TO-220F2			







■ ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$, unless otherwise noted)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV _{DSS}	I _D =250μA, V _{GS} =0V	500			V
Drain-Source Leakage Current		I _{DSS}	V _{DS} =500V, V _{GS} =0V			1	μA
			V _{DS} =400V, T _C =125°C			10	
Gate- Source Leakage Current	Forward	I _{GSS}	V _{GS} =+30V, V _{DS} =0V			+100	nA
	Reverse		V _{GS} =-30V, V _{DS} =0V			-100	nA
ON CHARACTERISTICS							
Gate Threshold Voltage		V _{GS(TH)}	V _{DS} =V _{GS} , I _D =250μA	2.0		4.0	V
Static Drain-Source On-State Resistance		R _{DS(ON)}	V _{GS} =10V, I _D =4.5A			0.85	Ω
DYNAMIC PARAMETERS							
Input Capacitance		C _{ISS}	V _{GS} =0V, V _{DS} =25V, f=1.0MHz		685		pF
Output Capacitance		C _{OSS}			115		pF
Reverse Transfer Capacitance		C _{RSS}			12		pF
SWITCHING PARAMETERS							
Turn-ON Delay Time		t _{D(ON)}	V _{DD} =30V, I _D =0.5A, R _G =25Ω (Note 1, 2)		62		ns
Rise Time		t _R			86		ns
Turn-OFF Delay Time		t _{D(OFF)}			149		ns
Fall-Time		t _F			83		ns
Total Gate Charge		Q _G	V _{DS} =50V, I _D =1.3A, V _{GS} =10V (Note 1, 2)		27.2		nC
Gate to Source Charge		Q _{GS}			8.4		nC
Gate to Drain Charge		Q _{GD}			6.8		nC
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS							
Maximum Body-Diode Continuous Current		I _S				9	A
Maximum Body-Diode Pulsed Current		I _{SM}				36	A
Drain-Source Diode Forward Voltage		V _{SD}	I _S =9A, V _{GS} =0V			1.4	V



Notes: 1. Pulse Test: Pulse width $\leq 300\mu\text{s}$, Duty cycle $\leq 2\%$

2. Essentially independent of operating temperature.

■ TEST CIRCUITS AND WAVEFORMS

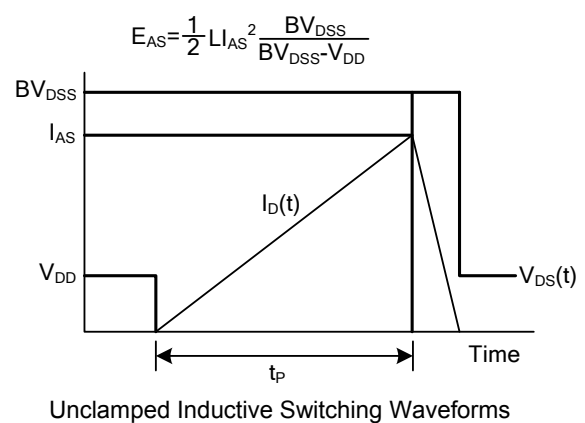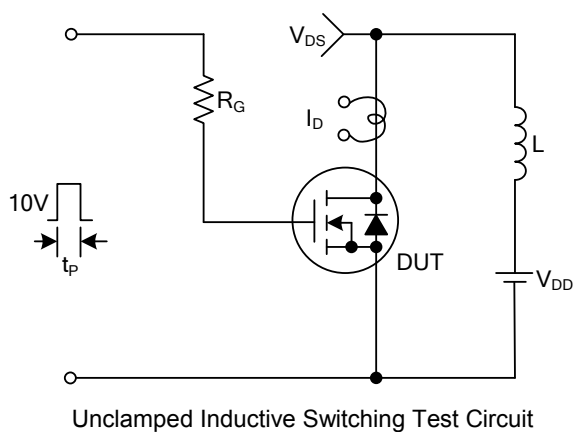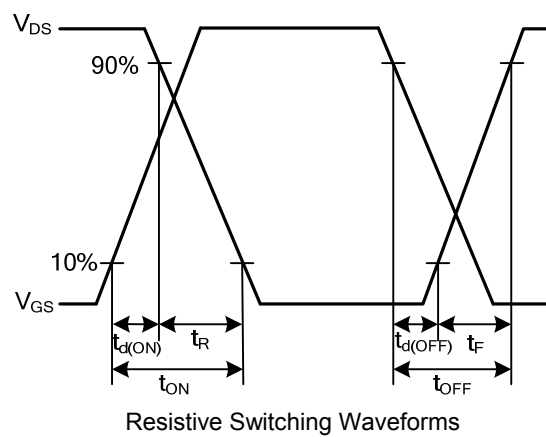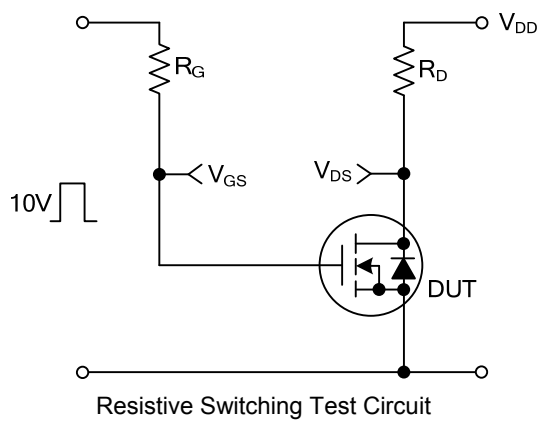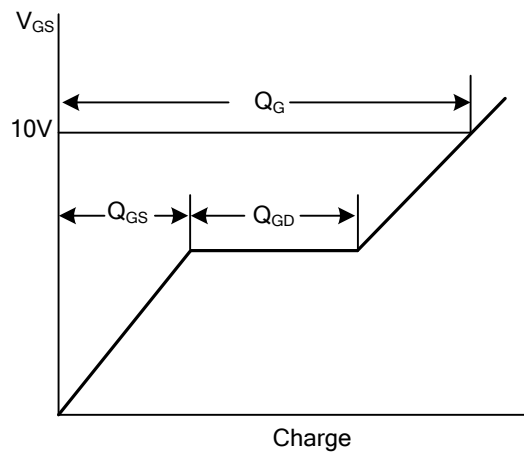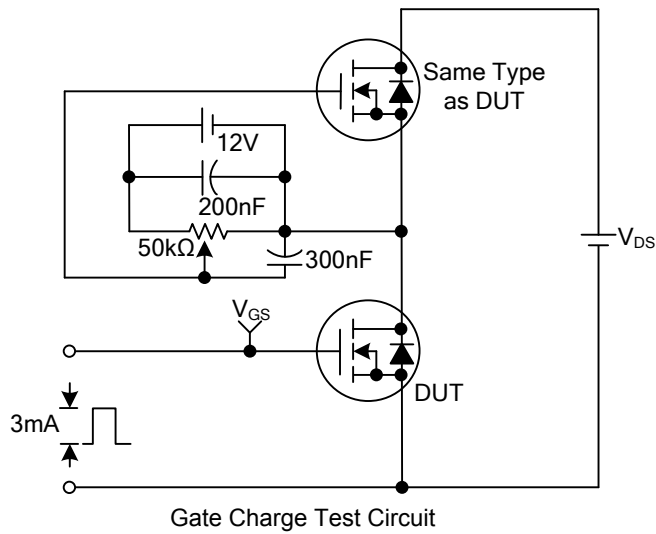

■ TEST CIRCUITS AND WAVEFORMS(Cont.)

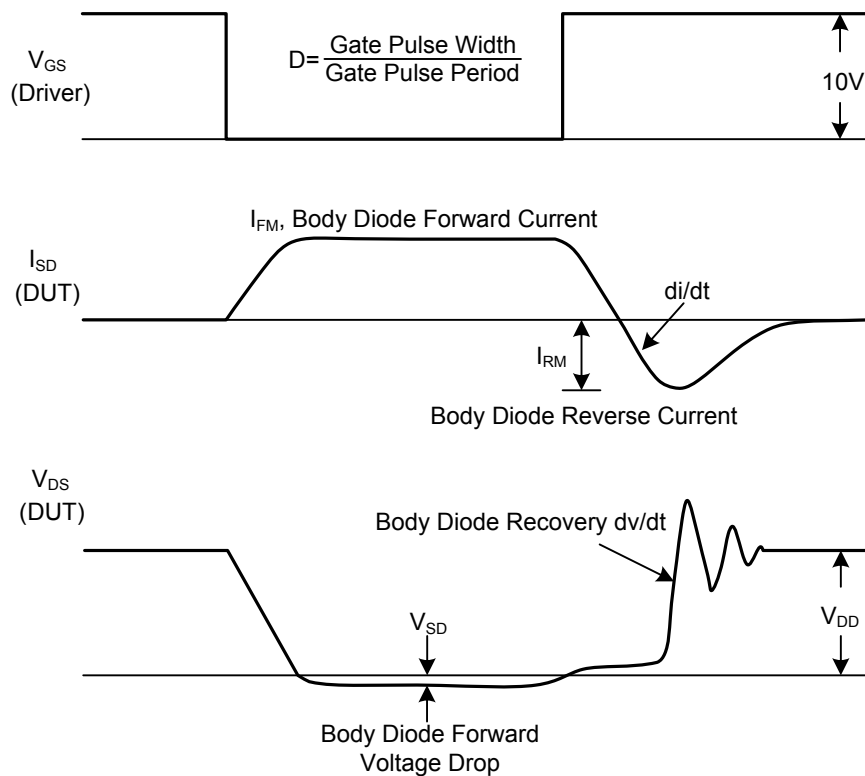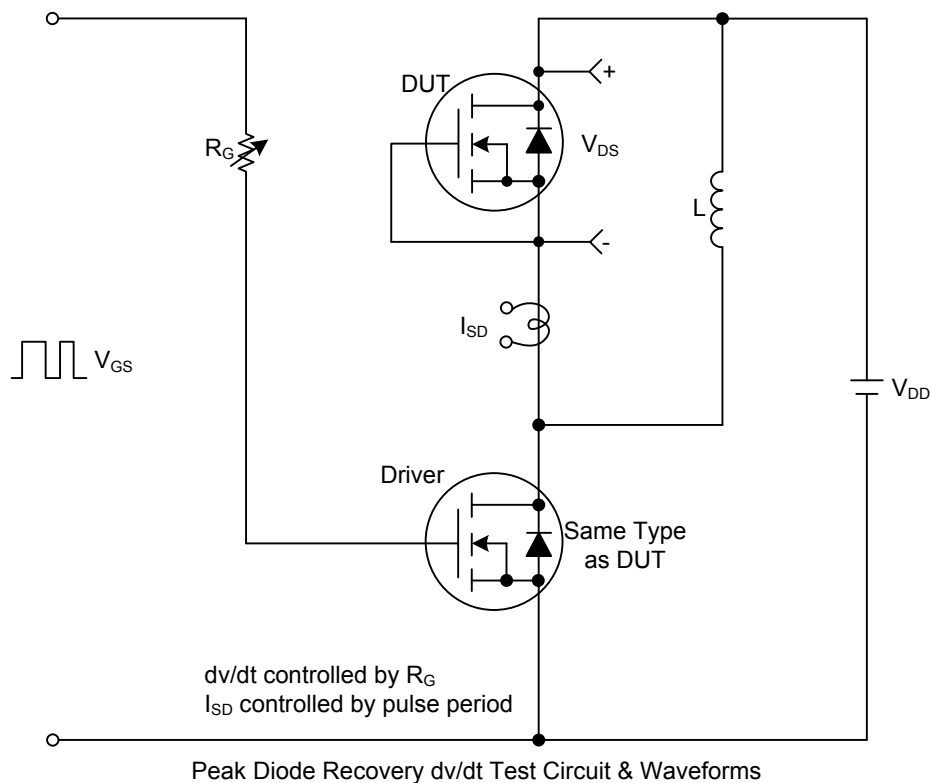

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.