Multilayer Ceramic Chip Capacitors

C3216X7R1H474M160AA








1 of 3 Creation Date : May 29, 2017 (GMT)



TDK item description C3216X7R1H474MT****

Applications	Commercial Grade Please refer to Part No. CGA5L2X7R1H474M160AA for Automotive use.	
Feature	General (Up to 50V)	
Series	C3216 [EIA 1206]	
Status	Production (Not Recommended for New Design)	



Size		
Length(L)	3.20mm ±0.20mm	
Width(W)	1.60mm ±0.20mm	
Thickness(T)	1.60mm ±0.20mm	
Terminal Width(B)	0.20mm Min.	
Terminal Spacing(G)	1.00mm Min.	
Recommended Land Pattern (PA)	2.10mm to 2.50mm(Flow Soldering)	
Recommended Land Fattern (FA)	2.00mm to 2.40mm(Reflow Soldering)	
Recommended Land Pattern (PB)	1.10mm to 1.30mm(Flow Soldering)	
Recommended Land Fattern (FB)	1.00mm to 1.20mm(Reflow Soldering)	
Recommended Land Pattern (PC)	1.00mm to 1.30mm(Flow Soldering)	
Neconiniended Land Fattern (FC)	1.10mm to 1.60mm(Reflow Soldering)	

Electrical Characteristics		
Capacitance	470nF ±20%	
Rated Voltage	50VDC	
Temperature Characteristic	X7R(±15%)	
Dissipation Factor (Max.)	3%	
Insulation Resistance (Min.)	1063ΜΩ	

Other	
Caldaring Mathad	Wave (Flow)
Soldering Method	Reflow
AEC-Q200	No
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	2000pcs

[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

C3216X7R1H474M160AA














Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

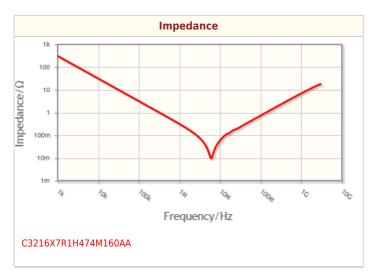


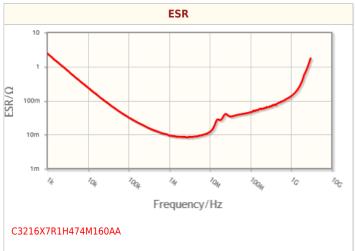

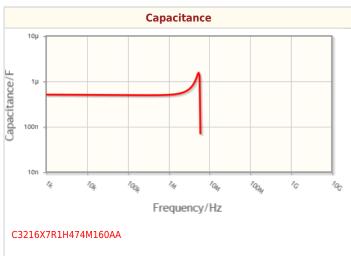

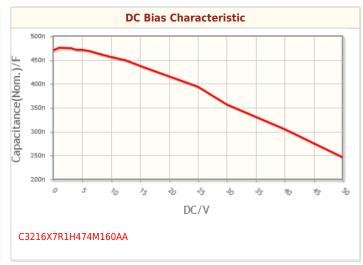

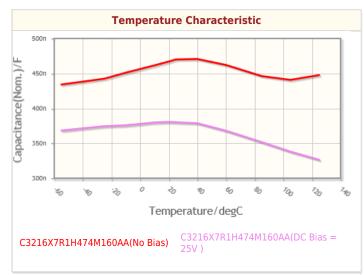

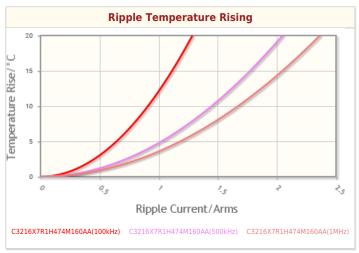

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

C3216X7R1H474M160AA










Associated Images



[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.