



INCANDESCENT BULB

PARAMETERS	SYMBOL	MAX.	UNITS
LAMP VOLTAGE (AC/DC)	V	6	V
POWER DISSIPATION	P <sub>D</sub>	2	Watts
CURRENT	I	200	mA

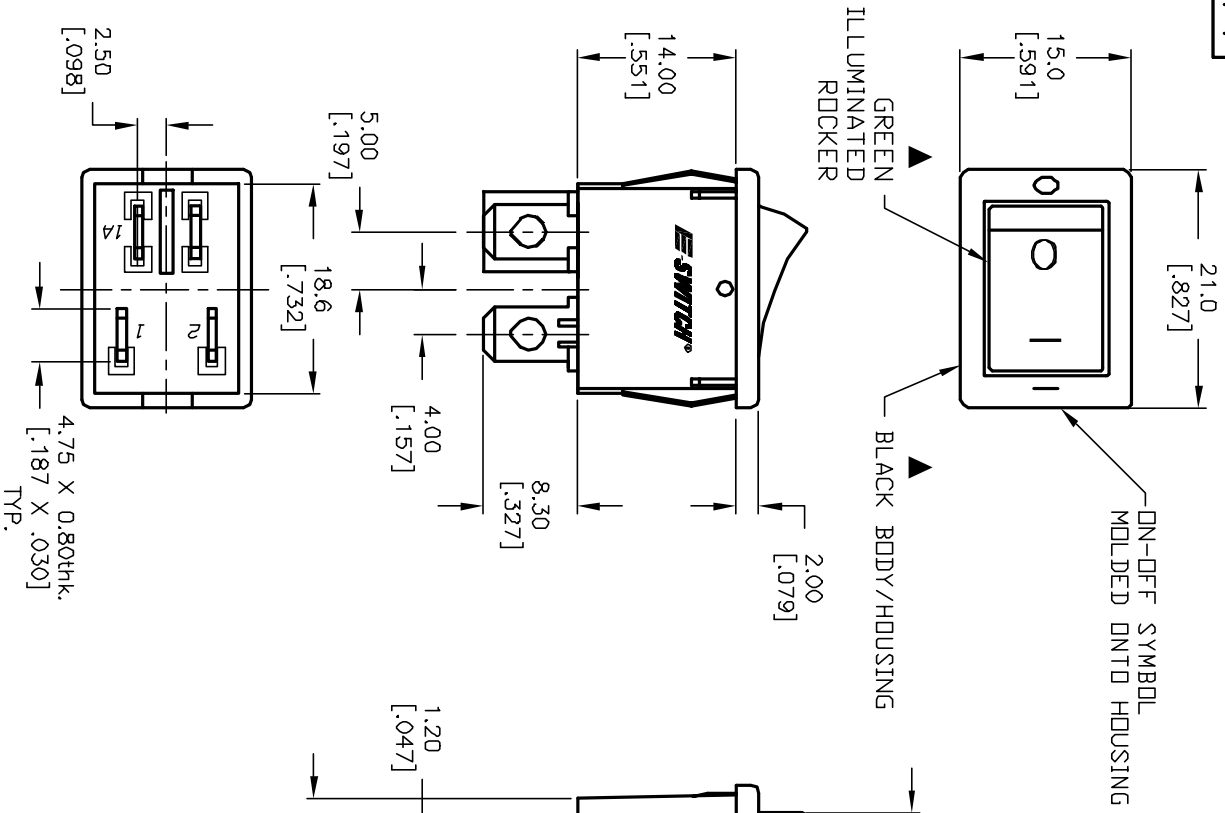

PANEL THICKNESS	X dimension
0.75-1.25 [0.30-.0491]	19.2-01 [7.561]
1.25-2.0 [0.49-.0792]	19.4-01 [7.641]
2.0-3.0 [0.79-.1181]	19.8-01 [7.801]

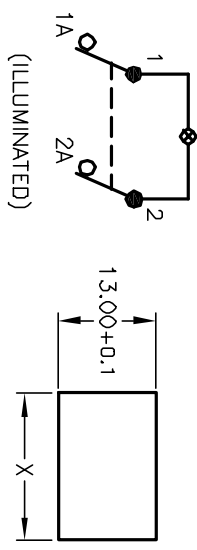

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. RATING:  
6A @250VAC;9A @125VAC (UL, CSA, VDE)  
4(1)A @250VAC
4. LAMP VOLTAGE: 6VDC (INCANDESCENT BULB)
5. MATERIAL:  
CONTACT SURFACE: Coin Silver, Silver Plate  
TERMINAL: Copper Alloy W/ Silver Plate,  
6. CONTACT RESISTANCE: 20mΩ TYP. INITIAL  
7. INSULATION RESISTANCE: 1000MΩ  
8. DIELECTRIC STRENGTH:  
> 1500V RMS min. @SEA LEVEL  
> 3000V RMS @SEA LEVEL  
9. MECHANICAL LIFE: 50,000 CYCLES.  
10. ELECTRICAL LIFE: 10,000 CYCLES.  
11. ▲ DENOTES CRITICAL PARAMETER.

B	19068	ADD TERMINAL IN R. SIDE VIEW	4/22/03	AR
A	13063	RELEASED FOR PRODUCTION	4/21/03	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE		SCALE		DATE		DR		DWG		REV	
R1973BBLKGLGF6		2:1		4/21/03		AR		M400070		B	



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED