

24

2480

USB and IEEE 1394 connectors




USB 2.0 connecting cable, type A plug 4 pole to mini type  
B plug 5 poles

---

State: Active

---

24 2480

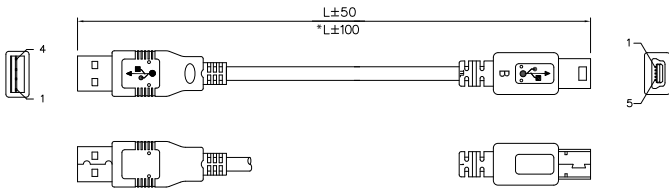

- 2480 01 UL2725 AWG28 (50 Ω each/100 Ω pair) + AWG28 x 2C + Al-Foil + Drain + Braid
- 2480 02 UL2725 AWG28 (50 Ω each/100 Ω pair) + AWG28 x 2C + Al-Foil + Drain + Braid
- 2480 03 UL2725 AWG28 (50 Ω each/100 Ω pair) + AWG26 x 2C + Al-Foil + Drain + Braid

USB-A/M	MINI USB-B/M
1 — RED — 1	
2 — WHITE — 2	
3 — 50 Ω each — 3	
3 — (Total 100 Ω pair) — 3	
GREEN — 3	
4 — BLACK — 5	
SHELL — BRAID — SHELL	

**Materials**

Overmolding/handle PVC

**Connected cable**

Construction UL2725 28 AWG x 1P + 28 AWG x 2C + Al-foil + drain + braid, PVC jacket

**Electrical data (at T<sub>amb</sub> 20 °C)**

Rated current 1 A  
Rated voltage 30 V AC

**Associated products**

Counterparts

<a href="#">☞ 1673 01</a>	<a href="#">☞ 2410 01</a>	<a href="#">☞ 2410 02</a>
<a href="#">☞ 2410 03</a>	<a href="#">☞ 2410 05</a>	<a href="#">☞ 2410 06</a>
<a href="#">☞ 2410 09</a>	<a href="#">☞ 2420 01</a>	<a href="#">☞ 2420 02</a>
<a href="#">☞ 2486 01</a>	<a href="#">☞ 2486 03</a>	<a href="#">☞ 4512</a>

24

2480

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)	Dimensions L (mm)
2480 01	4/5	400	400	1000
2480 02	4/5	200	200	2000
2480 03	4/5	150	100	3000

**Packaging:**

in bulk, in a cardboard box or a plastic bag