

isc N-Channel MOSFET Transistor

AOD2904

• FEATURES

- Static drain-source on-resistance:
 $R_{ds(on)} \leq 10m\Omega @ 10V$
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

• DESCRIPTION



- Synchronous Rectification in DC/DC and AC/DC Converters
- Industrial and Motor Drive applications

• ABSOLUTE MAXIMUM RATINGS(T_a=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _{DSS}	Drain-Source Voltage	100	V
V _{GS}	Gate-Source Voltage	±20	V
I _D	Drain Current-Continuous	70	A
I _{DM}	Drain Current-Single Pulsed	180	A
P _D	Total Dissipation @T _c =25°C	125	W
T _j	Max. Operating Junction Temperature	175	°C
T _{stg}	Storage Temperature	-55~175	°C

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th(j-c)}	Channel-to-case thermal resistance	1.2	°C/W

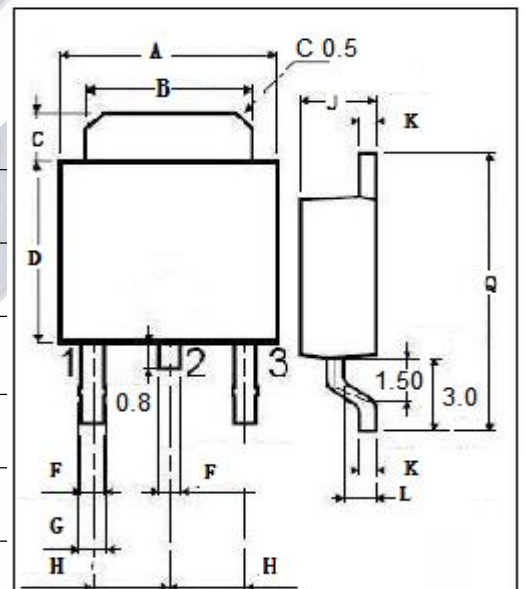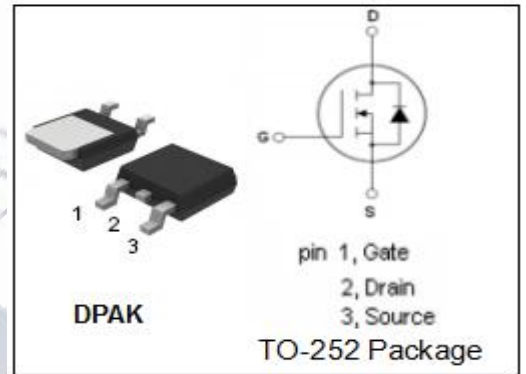

DIM	mm	
	MIN	MAX
A	6.40	6.60
B	5.20	5.40
C	1.15	1.35
D	5.70	6.10
F	0.65	
G	0.75	
H	2.10	2.50
J	2.10	2.40
K	0.40	0.60
L	0.90	1.10
Q	9.90	10.1

isc N-Channel MOSFET Transistor
AOD2904
ELECTRICAL CHARACTERISTICS

 T_C=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V; I _D =250 μ A	100			V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} ; I _D =250 μ A	2.3		3.4	V
R _{DS(on)}	Drain-Source On-Resistance	V _{GS} =10V; I _D =20A			10	m Ω
		V _{GS} =6V; I _D =20A			12.5	m Ω
I _{GSS}	Gate-Source Leakage Current	V _{GS} = ±20V; V _{DS} =0V			±100	nA
I _{DSS}	Drain-Source Leakage Current	V _{DS} =100V; V _{GS} = 0V			1	μ A
		V _{DS} =800V; V _{GS} = 0V; T _C =55°C			5	μ A
V _{SD}	Diode forward voltage	I _S =1A, V _{GS} = 0V			1	V