

# SMD Power Inductor CDRH73



## Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 7.5 × 7.5 × 3.4 mm Max.
- Product weight: 0.63g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

## Environmental Data

- Operating temperature range: -40°C~+100°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+100°C
- Solder reflow temperature: 260 °C peak.


## Packaging

- Carrier tape and reel packaging
- 12.9" diameter reel
- 1000pcs per reel


## Applications

- Ideally used in Notebook PC, LCD TV, DVD, Game machine, STB, Projector etc as DC-DC converter inductors.

## Dimension - [mm]

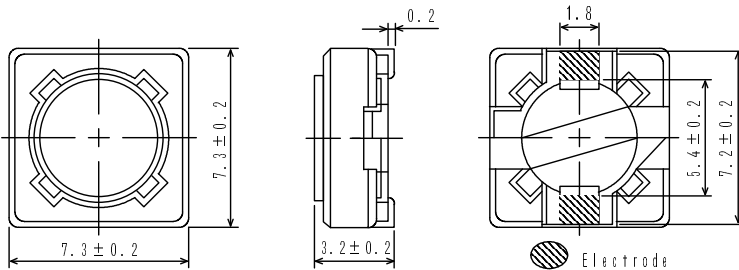

## Land pattern and Schematics - [mm]

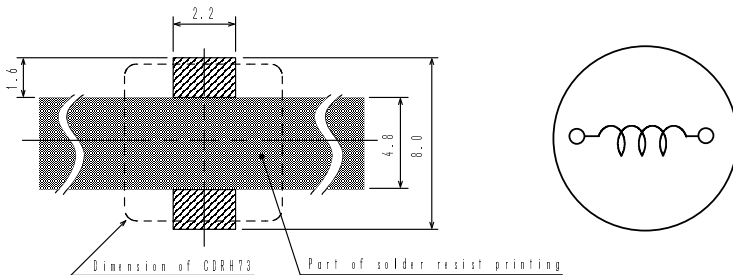

# SMD Power Inductor CDRH73



## Electrical Characteristics

| Part No.         | Stamp | Inductance<br>( $\mu$ H)<br>[ within ] ※1 | D.C.R.( $\Omega$ )<br>Max. (Typ.)<br>(at 20°C) | Rated Current<br>(A) ※2 |
|------------------|-------|---|--|-------------------------|
| CDRH73NP-100MC-B | 100   | 10 $\pm$ 20%                              | 72m (55m)                                      | 1.68                    |
| CDRH73NP-120MC-B | 120   | 12 $\pm$ 20%                              | 98m (75m)                                      | 1.52                    |
| CDRH73NP-150MC-B | 150   | 15 $\pm$ 20%                              | 0.13 (96m)                                     | 1.33                    |
| CDRH73NP-180MC-B | 180   | 18 $\pm$ 20%                              | 0.14 (0.11)                                    | 1.20                    |
| CDRH73NP-220MC-B | 220   | 22 $\pm$ 20%                              | 0.19 (0.15)                                    | 1.07                    |
| CDRH73NP-270MC-B | 270   | 27 $\pm$ 20%                              | 0.21 (0.16)                                    | 0.96                    |
| CDRH73NP-330MC-B | 330   | 33 $\pm$ 20%                              | 0.24 (0.18)                                    | 0.91                    |
| CDRH73NP-390MC-B | 390   | 39 $\pm$ 20%                              | 0.32 (0.25)                                    | 0.77                    |
| CDRH73NP-470MC-B | 470   | 47 $\pm$ 20%                              | 0.36 (0.28)                                    | 0.76                    |
| CDRH73NP-560MC-B | 560   | 56 $\pm$ 20%                              | 0.47 (0.36)                                    | 0.68                    |
| CDRH73NP-680MC-B | 680   | 68 $\pm$ 20%                              | 0.52 (0.40)                                    | 0.61                    |
| CDRH73NP-820MC-B | 820   | 82 $\pm$ 20%                              | 0.69 (0.53)                                    | 0.57                    |
| CDRH73NP-101MC-B | 101   | 100 $\pm$ 20%                             | 0.79 (0.61)                                    | 0.50                    |
| CDRH73NP-121MC-B | 121   | 120 $\pm$ 20%                             | 0.89 (0.69)                                    | 0.49                    |
| CDRH73NP-151MC-B | 151   | 150 $\pm$ 20%                             | 1.27 (1.02)                                    | 0.43                    |
| CDRH73NP-181MC-B | 181   | 180 $\pm$ 20%                             | 1.45 (1.16)                                    | 0.39                    |
| CDRH73NP-221MC-B | 221   | 220 $\pm$ 20%                             | 1.65 (1.32)                                    | 0.35                    |
| CDRH73NP-271MC-B | 271   | 270 $\pm$ 20%                             | 2.31 (1.85)                                    | 0.32                    |
| CDRH73NP-331MC-B | 331   | 330 $\pm$ 20%                             | 2.62 (2.10)                                    | 0.28                    |
| CDRH73NP-391MC-B | 391   | 390 $\pm$ 20%                             | 2.94 (2.35)                                    | 0.26                    |
| CDRH73NP-471MC-B | 471   | 470 $\pm$ 20%                             | 4.18 (3.35)                                    | 0.24                    |
| CDRH73NP-561MC-B | 561   | 560 $\pm$ 20%                             | 4.67 (3.73)                                    | 0.22                    |
| CDRH73NP-681MC-B | 681   | 680 $\pm$ 20%                             | 5.73 (4.58)                                    | 0.19                    |
| CDRH73NP-821MC-B | 821   | 820 $\pm$ 20%                             | 6.54 (5.23)                                    | 0.18                    |
| CDRH73NP-102MC-B | 102   | 1000 $\pm$ 20%                            | 9.44 (7.55)                                    | 0.16                    |

※1. Inductance measuring condition: at 1 kHz.













※2. Rated current: The DC current at which the inductance decreases to 75% of its nominal value or when  $\Delta t=40^{\circ}\text{C}$ , whichever is lower ( $T_a=20^{\circ}\text{C}$ ).

# SMD Power Inductor CDRH73




## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

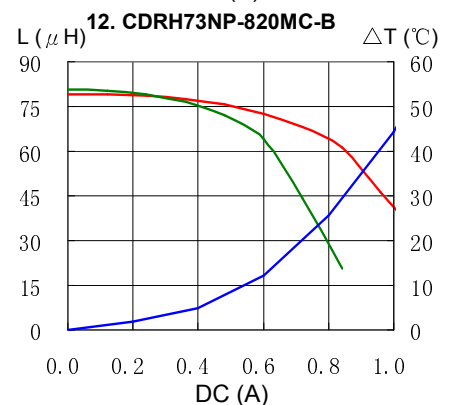
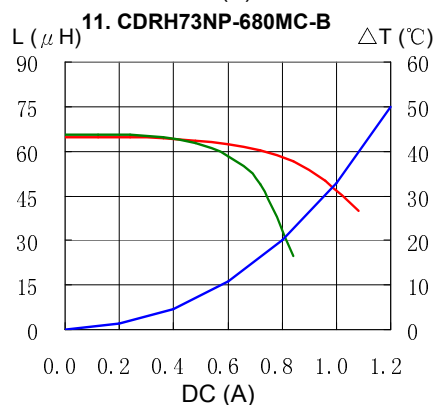
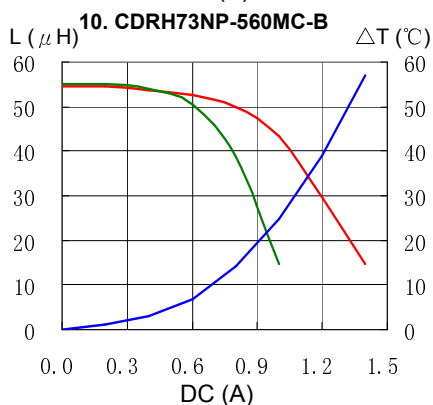
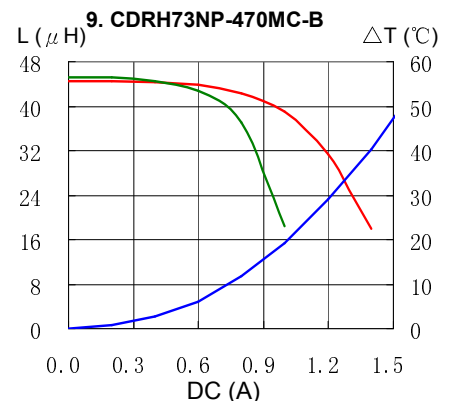
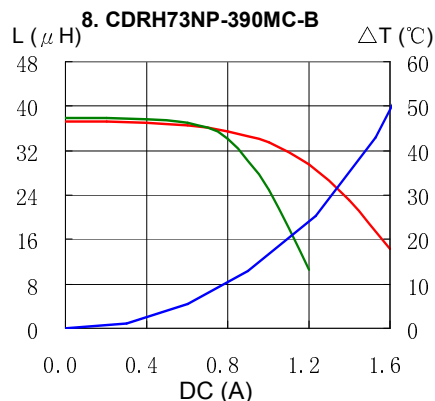
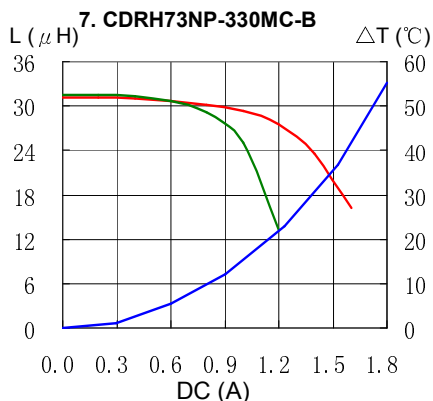
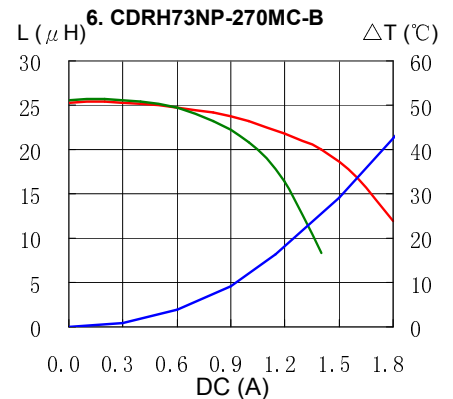
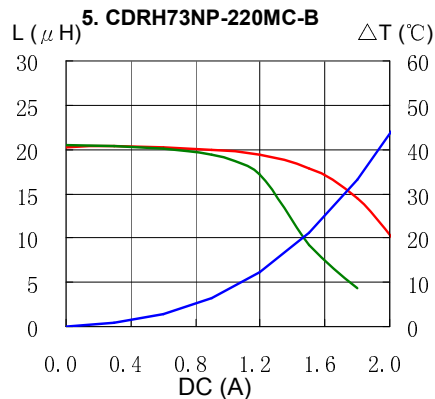
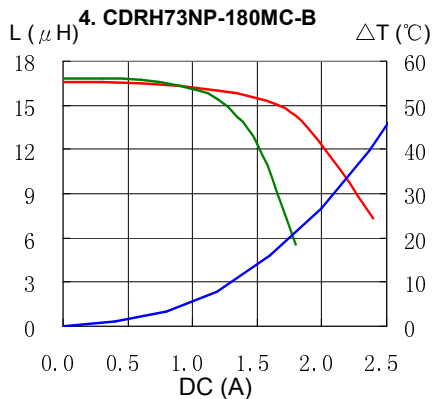
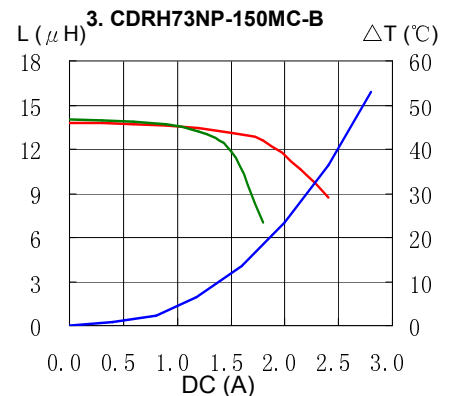
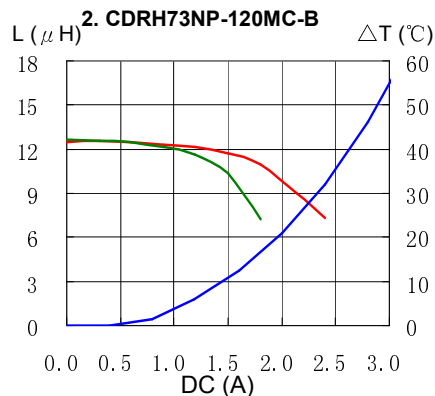
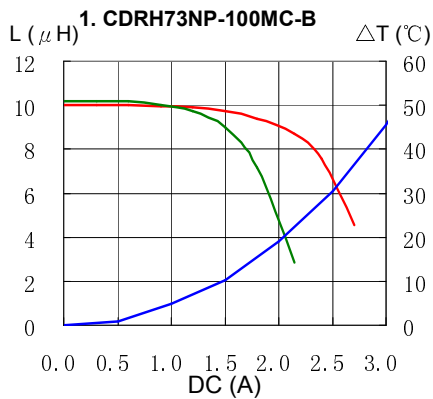


# SMD Power Inductor CDRH73



## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

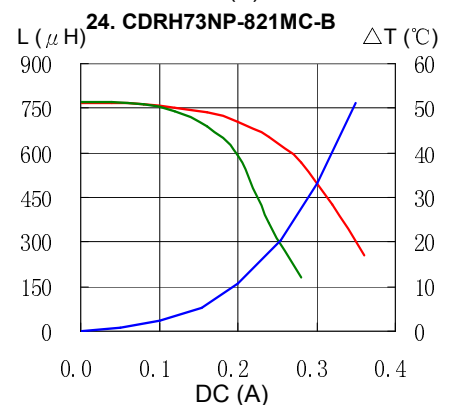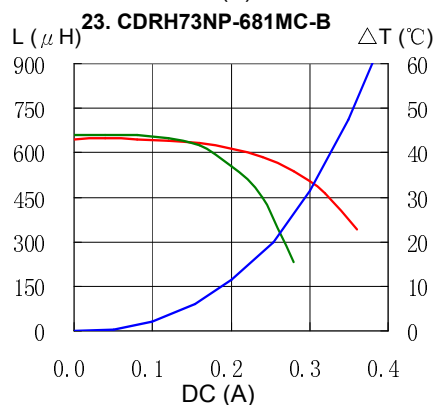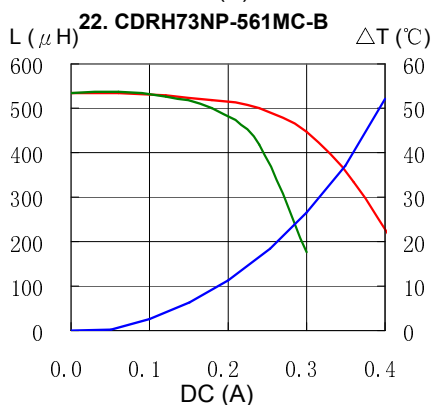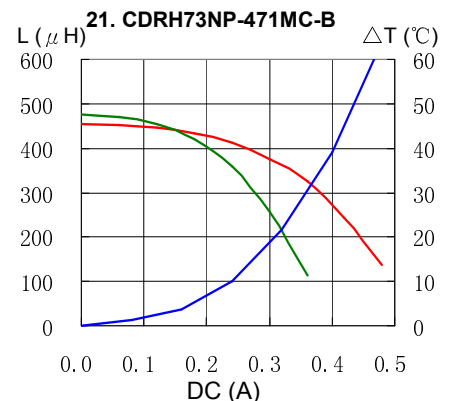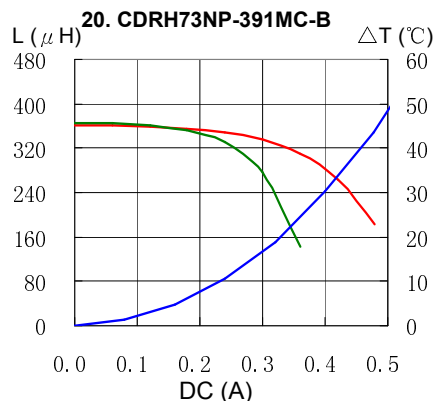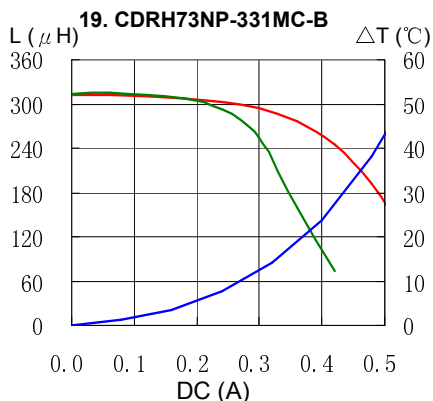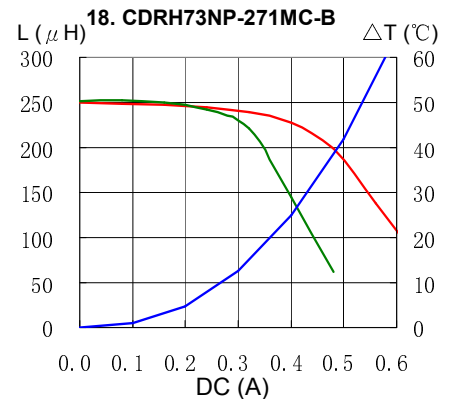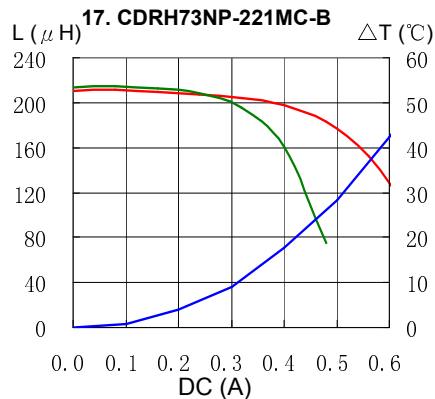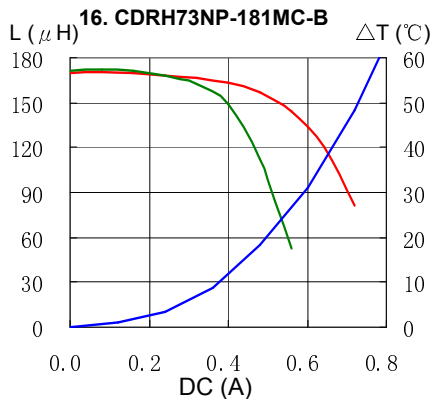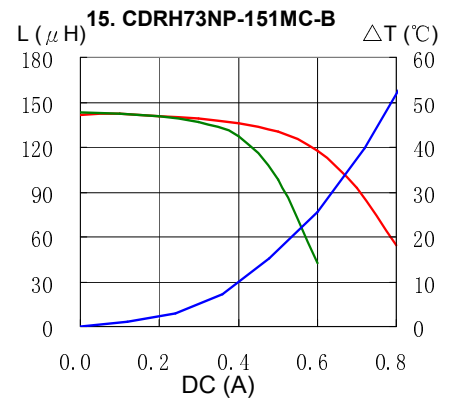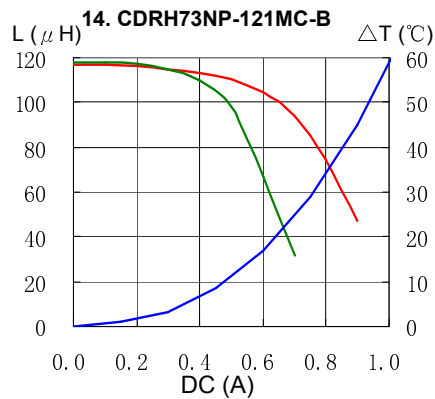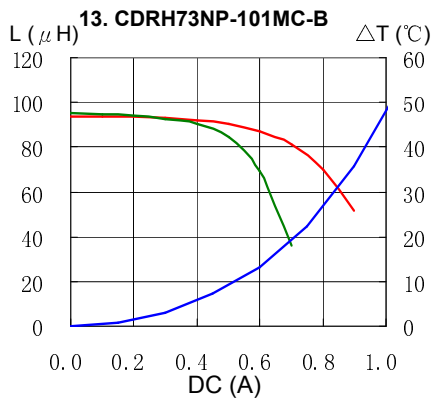


# SMD Power Inductor CDRH73





## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

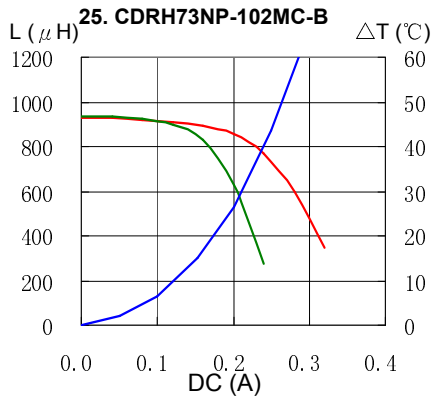

## Solder Reflow Condition

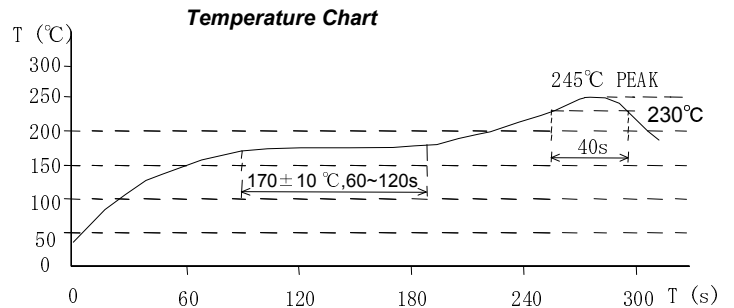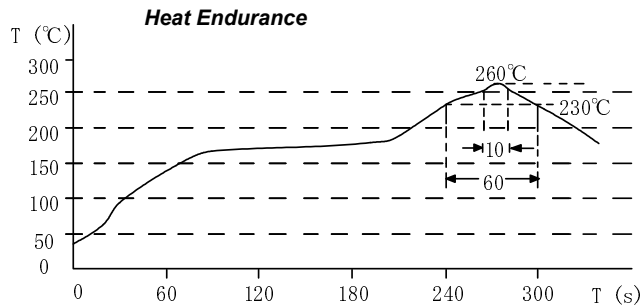

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6781  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel.+81-48-691-7300  
FAX.+81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-21-5836-3299  
FAX.+86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Oberzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)