
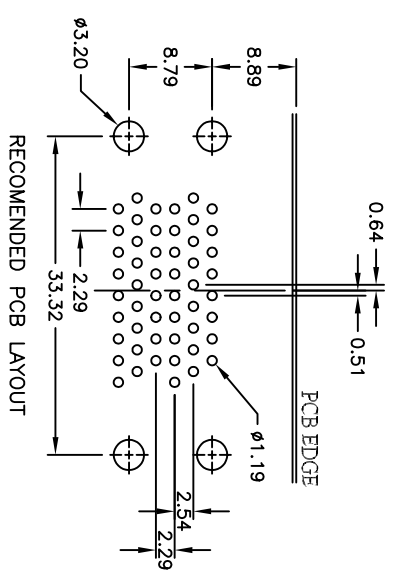
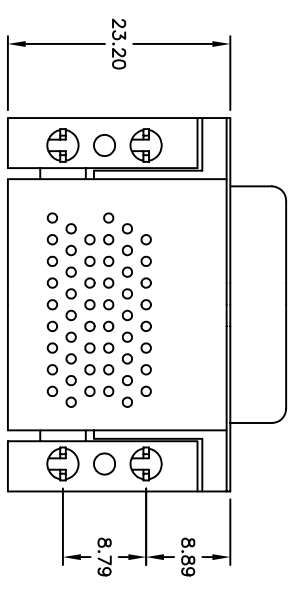


| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|---------|------|
| - | | RELEASED | 9/30/05 | |

APPROVED: _____
 DATE: _____ TITLE: _____

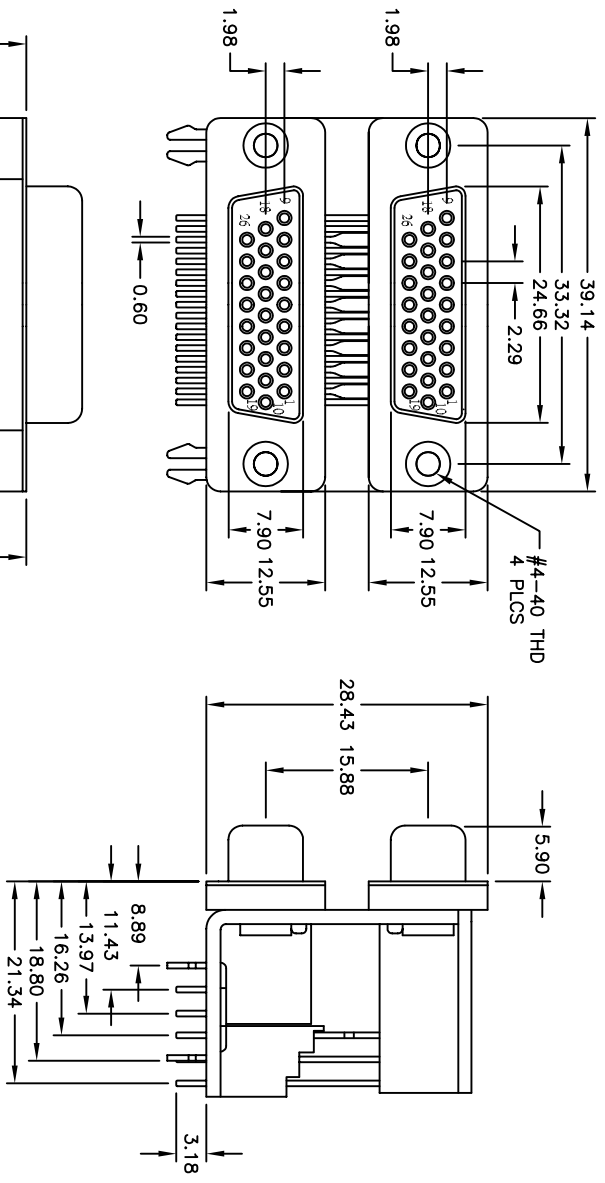

SPECIFICATIONS:

- Material: Insulator: PBT, 30% glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Shell: Steel, Nickel plated
- Plating: Gold flash over Nickel underplate overall
- Electrical: Operating voltage: 250 VAC max. Current rating: 2 Amps max. Contact resistance: 15 mohms max. initial Insulation resistance: 1,000 Mohms min. Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating: Operating temperature: -55°C to +105°C
- Environmental: Lead free, RoHS compliant. Recommended soldering temp: 230 for 5 sec.

| | |
|---|-------------|
| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED | |
| INCHES | HOLES |
| .X ± 0.25 | ∅XXX ± 0.13 |
| .XX ± 0.15 | |
| .XXX ± 0.05 | |
| APPROVALS | DATE |
| DRAWN | SS |
| CHECKED | |
| APPROVED | |

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DUAL PORT D-SUB, FEMALE / FEMALE
 HD62 OVER HD62, FORKED BOARDLOCKS

SIZE: X
 PART NO.: DPD-HD62-00-B3
 SCALE: NTS
 SHEET 1 OF 1