



Product Features

- 2400 ~ 2500MHz (ISM band)
- 3kW CW Peak Power
- Using GaN on SiC HEMT Transistors
- 50% System Efficiency
- High reliability & stability, long-run operation
- High frequency-stability with PLL technology
- Accurate adjustment function on output power, phase, frequency
- Very good frequency spectrum even at low power

Applications

- Building Block for High-power Systems
- Plasma Generator
- MW Heating and Drying
- Microwave CVD
- Microwave Sintering
- Microwave Chemistry
- Materials Processing
- Study of biological phenomena
- Semiconductor Equipment



Description

The RIF253K-40T uses GaN on SiC HEMT technology which performs high breakdown voltage and high efficiency.

This product is packaged in a rack mountable shelf with the water cooling system.

And this product is designed for High Power ISM(Industrial, Scientific, Medical) applications with adjustable power up to 3kW.

This Microwave Generator is suitable for use in CW, pulse and linear applications. This high efficiency rugged device is targeted to replace industrial magnetrons and other vacuum tubes currently powering industrial heating, drying, microwave CVD and sintering.

Electrical Specifications

PARAMETER		UNIT	MIN	TYP	MAX	SYMBOL
Operating Frequency		MHz	2400	-	2500	F _O
CW Variable Output Power		W	300	-	3000	P _o
Operating Bandwidth		MHz	-	100	-	OBW
System Efficiency		%	50	-	-	Eff
Pulse Duty Cycles		%	1	-	99	-
Control range of Frequency		MHz	2400	-	2500	-
Frequency resolution		kHz	-	100	-	-
Absolute frequency accuracy		ppm	-2.5	-	2.5	-
Frequency stability		ppm	-2.5	-	2.5	-
Phase adjustment		Deg.	0	-	360	-
Operating Voltage		VAC	400 VAC 3 phase 50/60 Hz			-
Controls	Generator On / Off	-	Enabled / Disabled			-
	Output Power Control		10 to 100 % (input)			
	Generator Alarm		1 or more outputs to indicate alarm condition / code (output)			
	Control Interface		RS232			

Preliminary

GaN

Solid State Microwave Generator

RIF253K-40T

RFHIC


Mechanical Specifications

PARAMETER	UNIT	VALUE
Dimensions (L x W x H)	mm	576.2 x 482.6 x 140
Weight	Kg	TBD
RF Input Connectors	-	SMA, Female
RF Output Connectors	-	WR340 waveguide
I/O Connector	-	D-sub 9pin
DC Connector	-	D-sub 3W3
Cooling	-	Water cooling (Water pressure: 8Bar)

Note

Dimensions and Connectors may be subjected change.

Power Shelf Exterior & Mechanical drawing

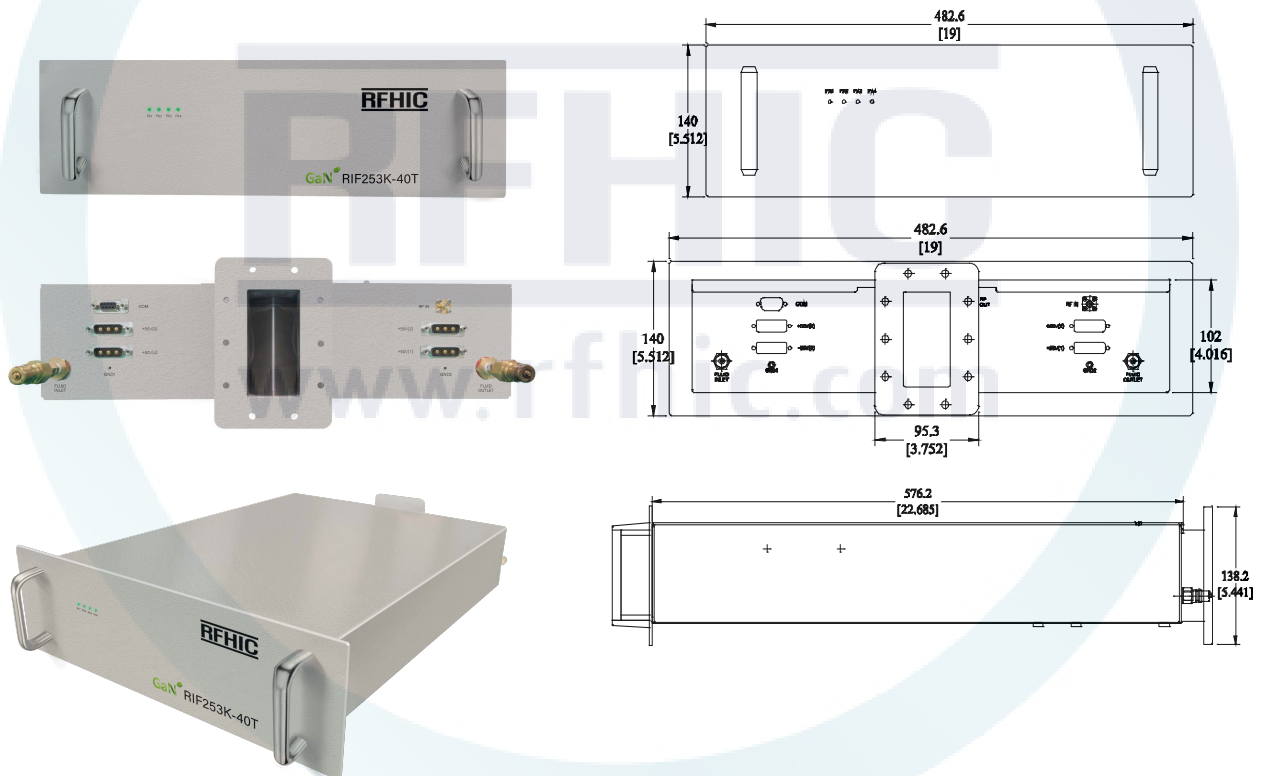

Note

Connector positions and module mount holes may be subjected change.

Preliminary

GaN

Solid State Microwave Generator

RIF253K-40T

RFHIC

Revision History

Part Number	Release Date	Version	Description	Data Sheet Status
RIF253K-40T	April, 2018	0.1	Initial release of datasheet	Preliminary

RFHIC
www.rfhic.com

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages.

RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use.

Sales, inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US Sales Team at 919-677-8780. For all other inquiries, please contact the International Sales Team at 82-31-8069-3036.