


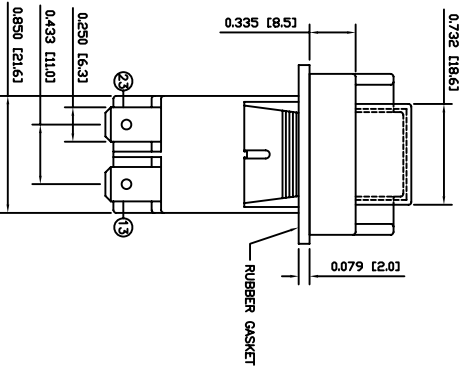


POSITION 2    POSITION 1

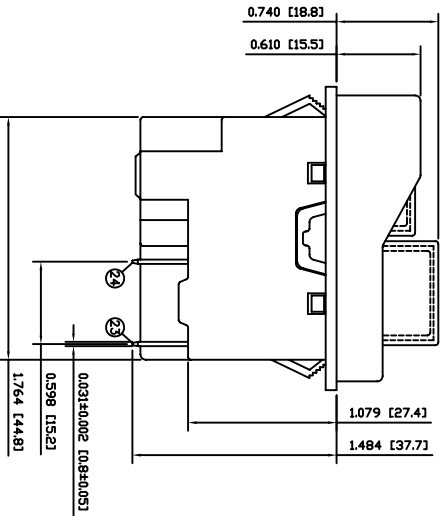

**SCHEMATIC**



**SPECIFICATIONS**

**FUNCTION:**  
2PT OFF-ON  
Auto Off Below Calibration Voltage

**RATINGS:**  
ANSI/UL 508 and CAN/CSA 222.2 No.14 (E195908):  
16A 220-240VAC [cUrms]  
2HP 220-240VAC (12A FLA, 72A IRL) [cUrms]

**CALIBRATION VOLTAGE:**  
Use: 240V 50Hz  
Release: 130-170V

**ELECTRICAL LIFE:**  
6,000 Cycles [cUrms]

**INGRESS PROTECTION:**  
IP55

APPROVALS:  
**ROHS**  
COMPLIANT

**COLORS AND MARKINGS**

**BEZEL:**  
Black

**ACTUATOR:**  
ON: Green  
OFF: Red

**MARKING:**  
I/O Vertical (1)

**MARKING COLOR:**  
White

**MATERIALS**

**UPPER BODY:**  
Polyamide 6/6 (PA66)

**LOWER BODY:**  
Polyamide 6/6 (PA66+G10)

**BEZEL:**  
Polyamide 6/6 (PA66+G10)

**ACTUATORS:**  
Polyamide 6/6 (PA66)


**MOUNTING EARS:**  
Polyamide 6/6 (PA66)

**COVER:**  
Polyvinyl Chloride (PVC)

**CONTACTS:**  
Silver Alloy Clad Copper (AgSnO/Cu)

**TERMINALS:**  
Brass

**GASKET:**  
Rubber



KJD17-21513-112

**DIMENSIONS**  
INCHES [MILLIMETERS]  
GENERAL TOLERANCES ±0.020 [±0.5] / ±.1  
SCALE DRAWING NOT TO SCALE

PROJECTION DRAWING NUMBER 34-KJD171513112 DATE 7-31-2012 REVISION A

REV.	DATE	BY	CHK	APP
A	09/08/07	CAB		
A	09/08/07	CAB		
A	09/08/07	CAB		

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.

REV.	DESCRIPTION	DATE	BY	CHK	APP
A	New Release	07/27/12	PCB		