

Isc N-Channel MOSFET Transistor

STP60NF06L

• FEATURES

- With low gate drive requirements
- Easy to drive
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

• APPLICATIONS



- Solenoid and relay drivers
- DC-DC converters
- Automotive environment

• ABSOLUTE MAXIMUM RATINGS(T_a=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _{DSS}	Drain-Source Voltage	60	V
V _{GSS}	Gate-Source Voltage	±15	V
I _D	Drain Current-Continuous@T _c =25°C T _c =100°C	60 42	A
I _{DM}	Drain Current-Single Pulsed	240	A
P _D	Total Dissipation	110	W
T _j	Operating Junction Temperature	-55~175	°C
T _{stg}	Storage Temperature	-55~175	°C

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th(ch-c)}	Channel-to-case thermal resistance	1.36	°C/W
R _{th(ch-a)}	Channel-to-ambient thermal resistance	62.5	°C/W

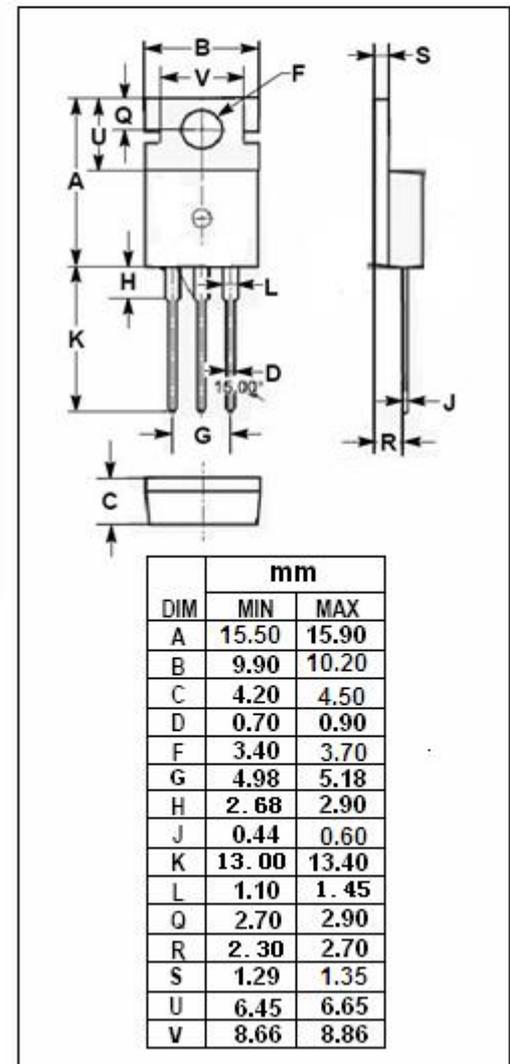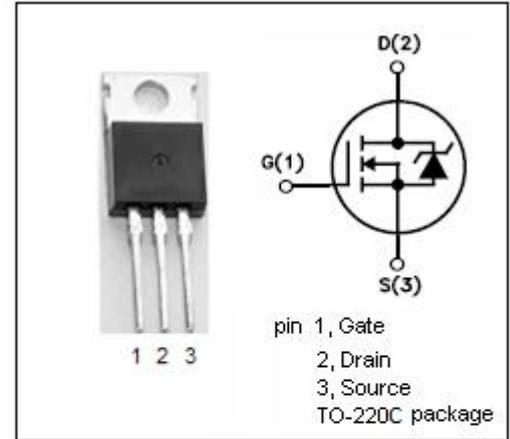

Isc N-Channel MOSFET Transistor

STP60NF06L

ELECTRICAL CHARACTERISTICS

T_C=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V; I _D = 0.25mA	60			V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =± 15V; I _D =0.25mA	1			V
R _{DS(on)}	Drain-Source On-Resistance	V _{GS} = 10V; I _D =30A		12	14	mΩ
I _{GSS}	Gate-Source Leakage Current	V _{GS} = ± 15V; V _{DS} = 0V			±0.1	μA
I _{DSS}	Drain-Source Leakage Current	V _{DS} = 60V; V _{GS} = 0V; T _J =25°C T _J =125°C			1 10	μA
V _{SDF}	Diode forward voltage	I _{SD} =100A, V _{GS} = 0 V			1.2	V