

MPB SERIES

Standard

- For applications where high frequency and high current are required. (TV, display monitor, power supply, lighting Inverter, etc)
- Coated with flame-retardant (UL94 V-0) epoxy resin.

RoHS compliance




SPECIFICATIONS


Category Temperature Range	-40~+105°C
Rated Voltage (U _R)	250Vdc, 450Vdc, 630Vdc
Capacitance Tolerance	±3%(H), ±5%(J), ±10%(K)
tanδ	0.001max at 1kHz
Voltage Proof	U _R ×150% 60s
Insulation Resistance	C≤0.33μF:25000MΩmin C>0.33μF: 7500ΩFmin
Reference Standard	JIS C 5101-16, JIS C 5101-1

DIMENSIONS

(mm)

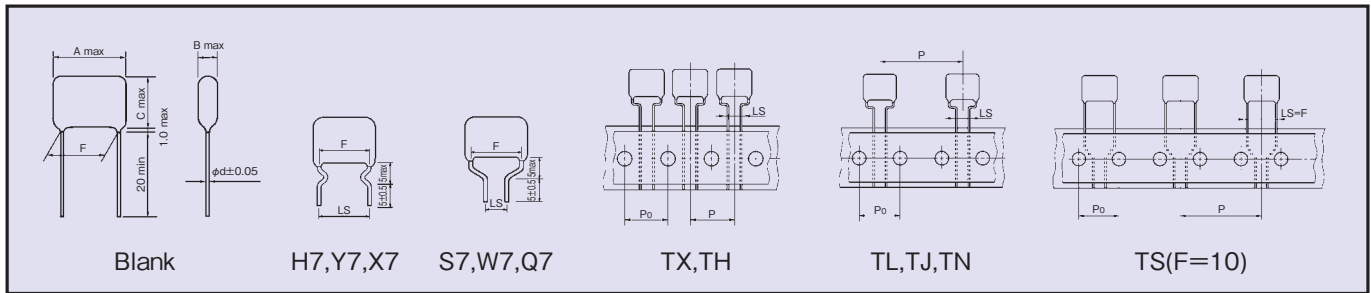

PART NUMBER



PERMISSIBLE CURRENT FOR FREQUENCY

