
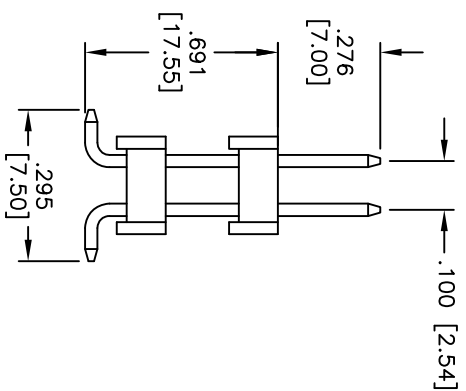
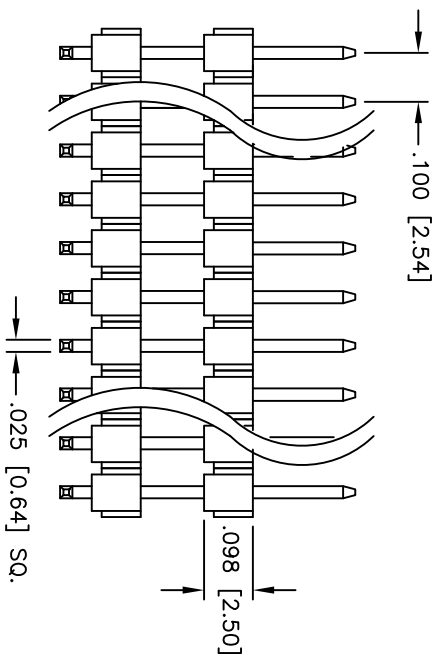
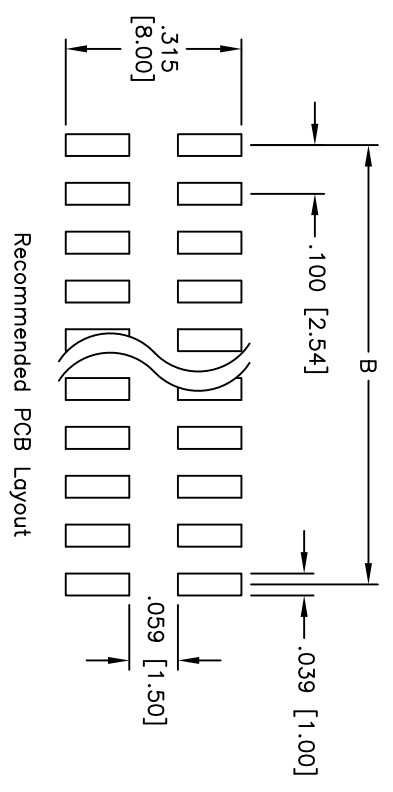


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/20/10	

APPROVED: _____
 DATE: _____ TITLE: _____

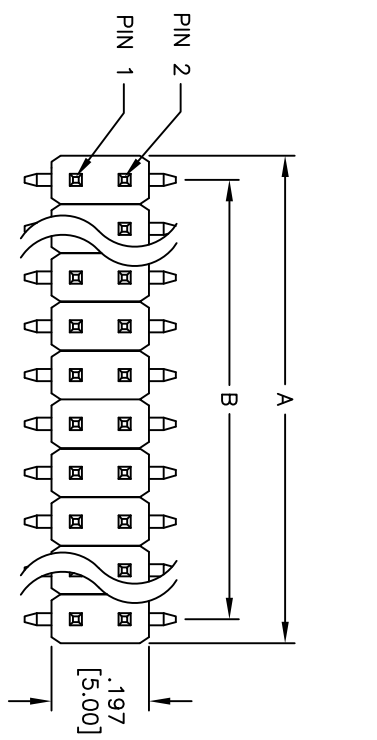

SPECIFICATIONS:

Material: Nylon 6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: Gold
 Flash over Nickel underplate overall.

Electrical:
 Operating voltage: 250 VAC max
 Current rating: 3 Amp max

Insulation resistance: 20 mohms max
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: -40°C to +105°C

Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



Positions: 2 thru 80
 A = .100 [2.54] x No. of Positions
 B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	
HOLDERS	
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] DUAL ROW PIN HEADER
 DUAL INSULATOR, SURFACE MOUNT

SIZE	PART NO.	REV.
X	DPH-2-XX-U-276SMT/691	-
REF:	SCALE: NTS	SHEET 1 OF 1