

Single N-channel MOSFET

ELM34404AA-N

■General description

ELM34404AA-N uses advanced trench technology to provide excellent $R_{ds(on)}$, low gate charge and low gate resistance.

■Features

- $V_{ds}=60V$
- $I_d=5.5A$
- $R_{ds(on)} < 55m\Omega$ ($V_{gs}=10V$)
- $R_{ds(on)} < 75m\Omega$ ($V_{gs}=4.5V$)

■Maximum absolute ratings

Ta=25°C. Unless otherwise noted.


Parameter	Symbol	Limit	Unit	Note
Drain-source voltage	Vds	60	V	
Gate-source voltage	Vgs	± 20	V	
Continuous drain current Ta=25°C	Id	5.5	A	3
Ta=70°C	Id	4.5		
Pulsed drain current	Idm	20	A	
Power dissipation Tc=25°C	Pd	2.5	W	
Tc=70°C	Pd	1.3		
Junction and storage temperature range	Tj, Tstg	-55 to 150	°C	

■Thermal characteristics

Parameter	Symbol	Typ.	Max.	Unit	Note
Maximum junction-to-ambient	Steady-state	R _{θja}		50	°C/W


■Pin configuration

SOP-8(TOP VIEW)

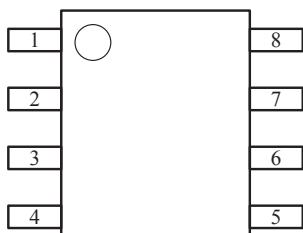

Pin No.	Pin name
1	SOURCE
2	SOURCE
3	SOURCE
4	GATE
5	DRAIN
6	DRAIN
7	DRAIN
8	DRAIN

■Circuit



Single N-channel MOSFET

ELM34404AA-N

■Electrical characteristics

Ta=25°C. Unless otherwise noted.

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Note
STATIC PARAMETERS							
Drain-source breakdown voltage	BVdss	Id=250µA, Vgs=0V	60			V	
Zero gate voltage drain current	Idss	Vds=48V, Vgs=0V			1	µA	
		Vds=40V, Vgs=0V, Ta=55°C			10		
Gate-body leakage current	Igss	Vds=0V, Vgs=±20V			±100	nA	
Gate threshold voltage	Vgs(th)	Vds=Vgs, Id=250µA	1.0	1.5	2.5	V	
On state drain current	Id(on)	Vgs=10V, Vds=5V	20			A	1
Static drain-source on-resistance	Rds(on)	Vgs=10V, Id=5.5A		42	55	mΩ	1
		Vgs=4.5V, Id=4.5A		55	75	mΩ	
Forward transconductance	Gfs	Vds=10V, Id=5.5A		14		S	1
Diode forward voltage	Vsd	If=1A, Vgs=0V			1	V	1
Max. body-diode continuous current	Is				1.3	A	
Pulsed body-diode current	Ism				2.6	A	3
DYNAMIC PARAMETERS							
Input capacitance	Ciss	Vgs=0V, Vds=25V, f=1MHz		650		pF	
Output capacitance	Coss			80		pF	
Reverse transfer capacitance	Crss			35		pF	
SWITCHING PARAMETERS							
Total gate charge	Qg	Vgs=10V, Vds=30V, Id=5.5A		12.5	18.0	nC	2
Gate-source charge	Qgs			2.4		nC	2
Gate-drain charge	Qgd			2.6		nC	2
Turn-on delay time	td(on)	Vgs=10V, Vds=30V, Id=1A Rgen=6Ω		11	20	ns	2
Turn-on rise time	tr			8	18	ns	2
Turn-off delay time	td(off)			19	35	ns	2
Turn-off fall time	tf			6	15	ns	2







NOTE :

1. Pulsed width≤300µsec and Duty cycle≤2%;
2. Independent of operating temperature;
3. Pulsed width limited by maximum junction temperature.
4. Duty cycle ≤ 1%.

Single N-channel MOSFET

ELM34404AA-N


■ Typical electrical and thermal characteristics

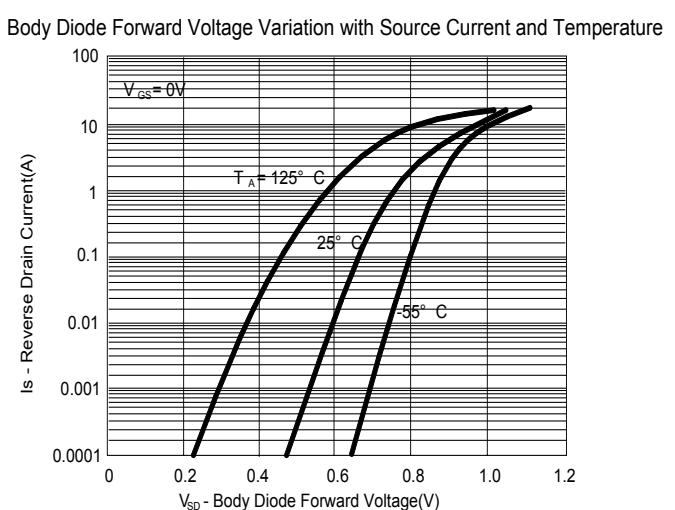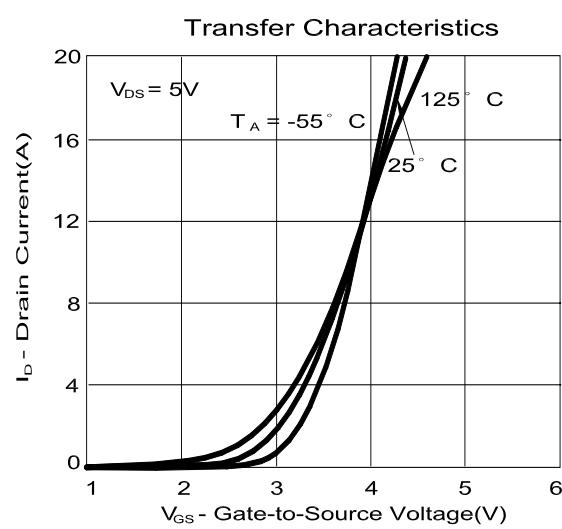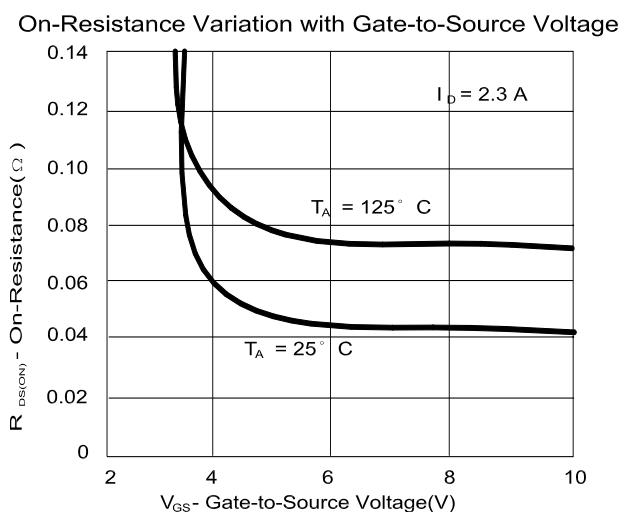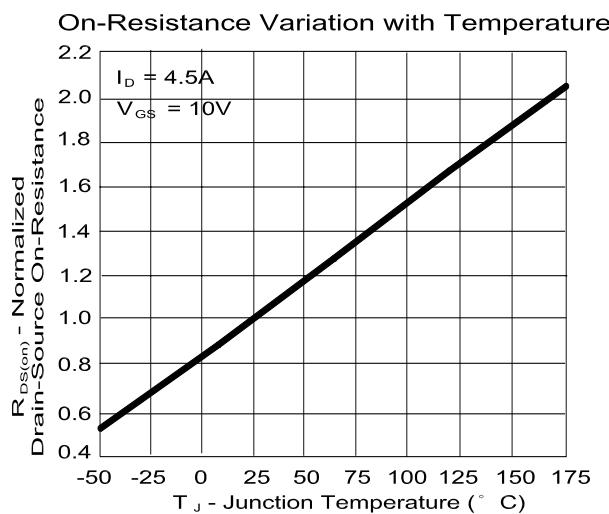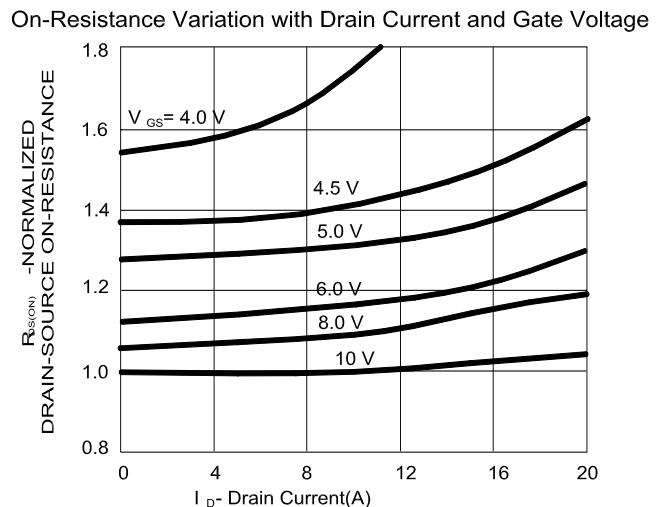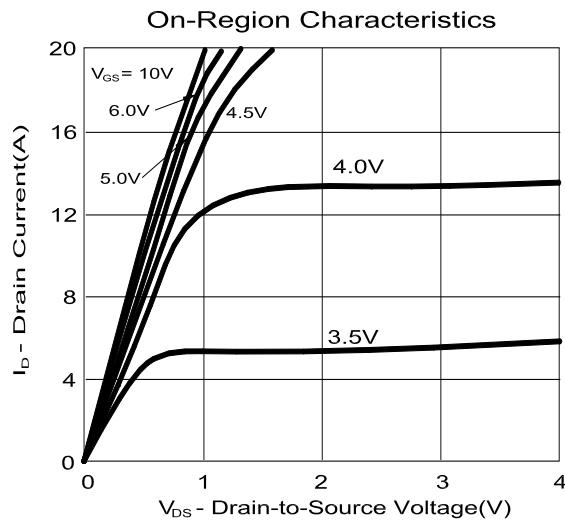


Single N-channel MOSFET

ELM34404AA-N


Gate Charge Characteristics

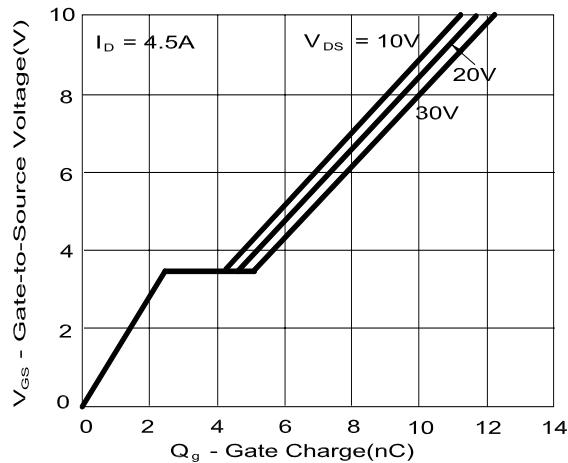


Capacitance Characteristics

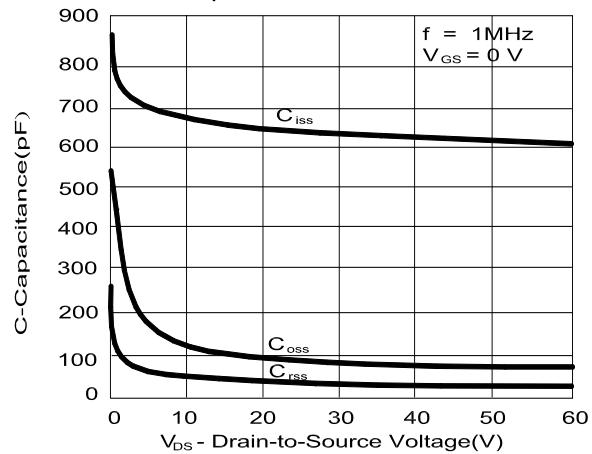

Maximum Safe Operating Area

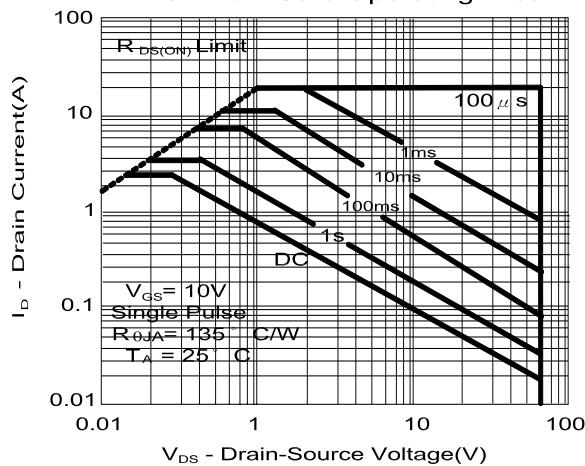

Single Pulse Maximum Power Dissipation

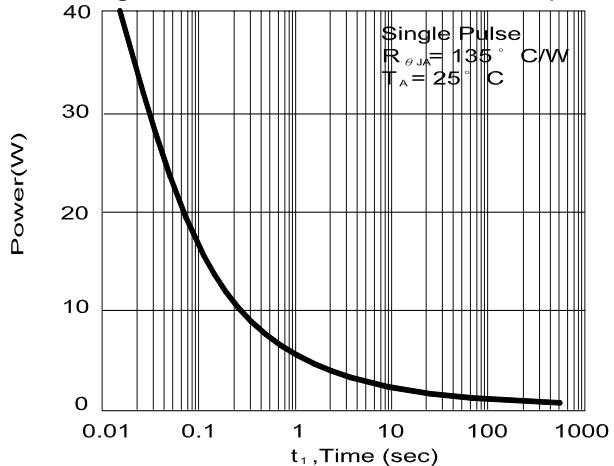

Transient Thermal Response Curve

