


51 5,08 UFL

Direct connectors for insert cards, pitch 2.5/2.54/5.0/ 5.08 mm

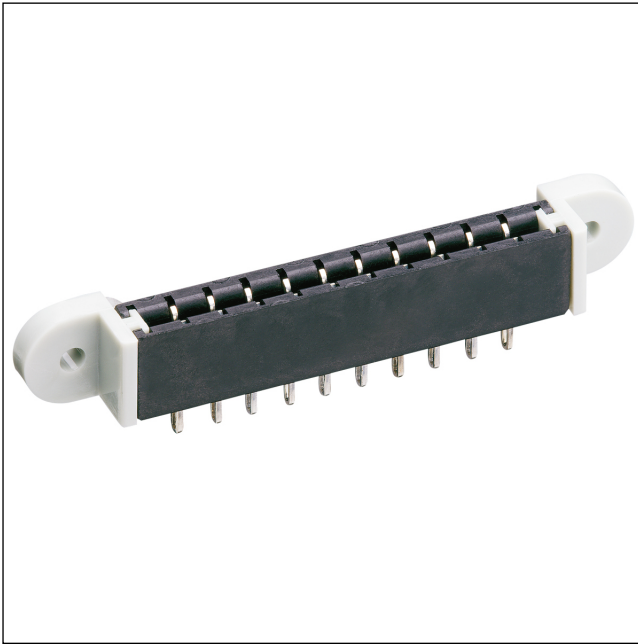

Socket board for direct mating, with mounted pair of flanges FL, with solder eyes


---

State: Phasing out

---

51

5,08 UFL

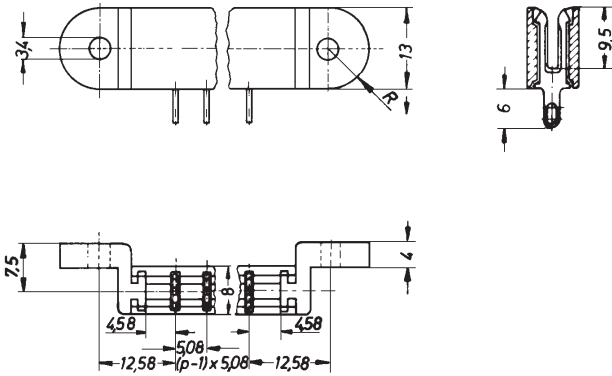

#### Environmental conditions

Temperature range -25 °C/+100 °C

#### Materials

Insulating body PPO  
Contact spring CuSn, pre-nickel and tin-plated  
Flange PC

#### Mechanical data

Mating with Leiterplatte 1,5 ± 0,14 mm

#### Electrical data (at T<sub>amb</sub> 20 °C)

Contact resistance ≤ 3 mΩ  
Rated current 5 A  
Rated voltage 250 V AC  
Rated impulse voltage ≥ 3,0 kV

#### Associated products

Accessories  
☑ SP 3

51

5,08 UFL

| Designation | Pole Number | PU (Pieces) | MDQ (Pieces) |
|-------------|-------------|-------------|--------------|
| 5,08 UFL 03 | 3           | 200         | 2000         |
| 5,08 UFL 04 | 4           | 200         | 2000         |
| 5,08 UFL 05 | 5           | 200         | 2000         |
| 5,08 UFL 06 | 6           | 200         | 2000         |
| 5,08 UFL 07 | 7           | 200         | 2000         |
| 5,08 UFL 08 | 8           | 200         | 2000         |
| 5,08 UFL 09 | 9           | 200         | 2000         |
| 5,08 UFL 10 | 10          | 200         | 2000         |
| 5,08 UFL 11 | 11          | 200         | 2000         |
| 5,08 UFL 12 | 12          | 200         | 2000         |
| 5,08 UFL 13 | 13          | 200         | 2000         |
| 5,08 UFL 14 | 14          | 200         | 2000         |
| 5,08 UFL 15 | 15          | 200         | 2000         |
| 5,08 UFL 16 | 16          | 200         | 2000         |
| 5,08 UFL 17 | 17          | 200         | 2000         |
| 5,08 UFL 18 | 18          | 200         | 2000         |
| 5,08 UFL 19 | 19          | 200         | 2000         |
| 5,08 UFL 20 | 20          | 200         | 2000         |
| 5,08 UFL 21 | 21          | 200         | 2000         |
| 5,08 UFL 22 | 22          | 200         | 2000         |
| 5,08 UFL 23 | 23          | 200         | 2000         |
| 5,08 UFL 24 | 24          | 200         | 2000         |
| 5,08 UFL 25 | 25          | 200         | 2000         |
| 5,08 UFL 26 | 26          | 200         | 2000         |
| 5,08 UFL 27 | 27          | 200         | 2000         |
| 5,08 UFL 28 | 28          | 200         | 2000         |
| 5,08 UFL 29 | 29          | 200         | 2000         |
| 5,08 UFL 30 | 30          | 200         | 2000         |
| 5,08 UFL 31 | 31          | 200         | 2000         |

**Packaging:**

in bulk, in a cardboard box