


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/04/09	

APPROVED: _____

DATE: _____ TITLE: _____

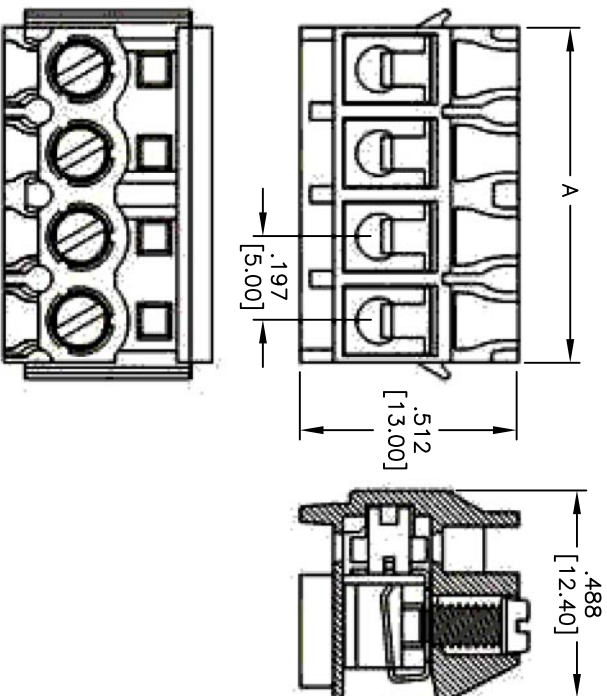

SPECIFICATIONS:

Material:

Insulator: Nylon66, rated UL 94V-0

Insulator color: Black

Wire Cage: Brass, Nickel plated.

Clamping: Phosphor Bronze, Tin plated

Screw: Steel, M2.6/Zn plated.

Electrical:

Operation voltage: 250 VAC max

Current rating: 10 Amps max per Pole

Contact resistance: 20 Mohms max

Mechanical:

Screw Torque: 0.4Nm

Wire Range: 14-22Awg.

Environmental:

Operating temperature: -30°C to +105°C

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.

Poles: 2 thru 24
A = .197 [5.00] x No. of Poles

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TERMINAL BLOCK, .197 [5.00] PITCH

TITLE

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES

.X ± .10 ØX ± .10
.XX ± .020 ØXX ± .015
.XXX ± .015 ØXXX ± .010

APPROVALS

DATE

DRAWN DY 11/04/09

CHECKED

APPROVED

SIZE PART NO.

X

EB111-XX-C

REV.

-

REF: S00007T

SCALE: NTS

SHEET 1 OF 1

