


CD45-B2GA471K-NKA



Applications	Commercial Grade
Feature	Mid Voltage (100 to 630V) Safety Standard Approved Halogen-free
Series	CD45
Status	Production



Size	
Diameter(D)	8.00mm Max.
Thickness(T)	6.00mm Max.
Lead Gap(F)	10.00mm +2.00,-1.00mm
Lead Diameter(d)	0.60mm ±0.05mm

Electrical Characteristics	
Capacitance	470pF ±10%
Rated Voltage	400VAC
Withstanding Voltage	4kVAC
Temperature Characteristic	B(±10%)
Dissipation Factor (Max.)	2.5%
Insulation Resistance (Min.)	10000MΩ




Other	
Soldering Method	Flow Iron Soldering
Lead Length / Package Type	5mm for Bulk
AEC-Q200	No
Package Quantity	1000pcs

! Images are for reference only and show exemplary products.
 ! This PDF document was created based on the data listed on the TDK Corporation website.
 ! All specifications are subject to change without notice.

CD45-B2GA471K-NKA



Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

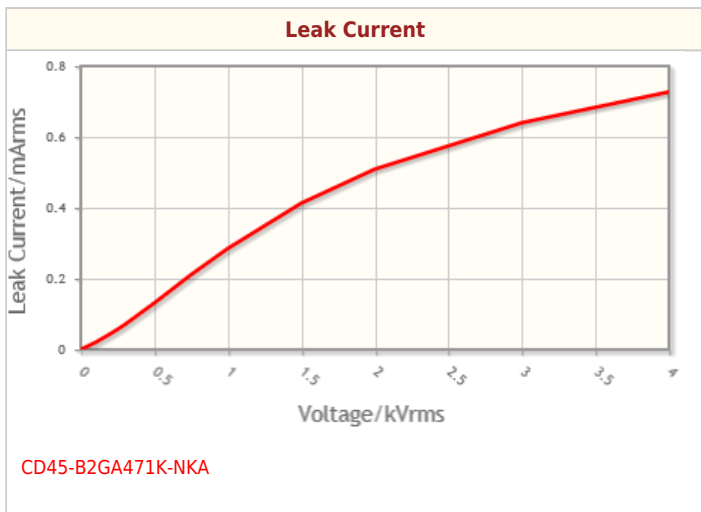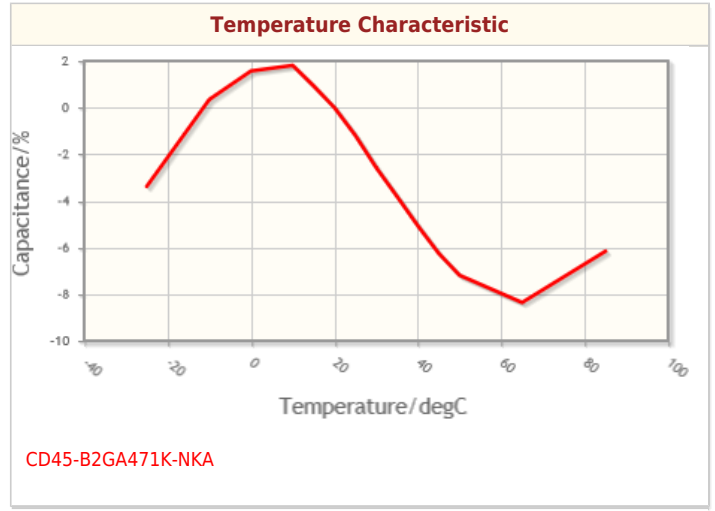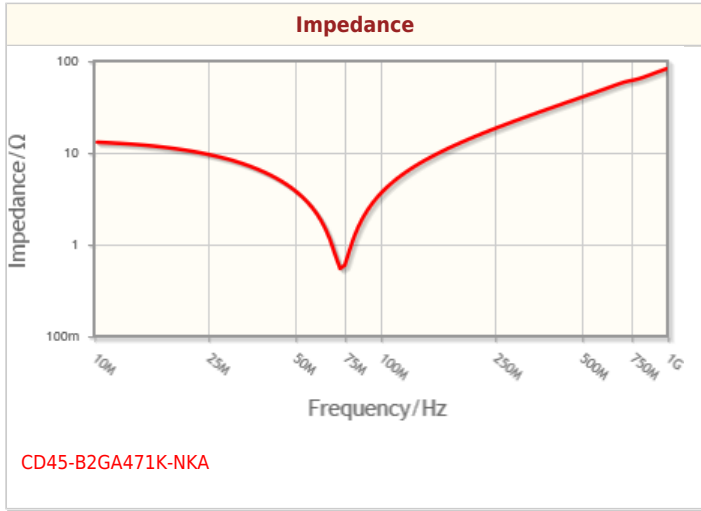

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.