

Model: D4021-111/211/311

characteristics:

Applicable for circuit of triggering pulse train

Technical indicators:

Installation method: PCB


Flame resistance: UL94-V0

Operating temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Storage temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Frequency range: 40KHz~200KHz


Dielectric strength: 3.1KV 50Hz 2s

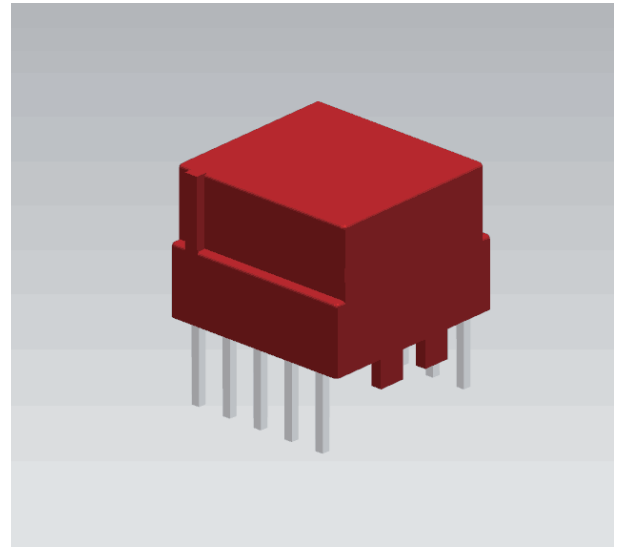


Electrical parameters:

Vout microsecond integral	120	μVs
Pulse width (D=1:2)	8/6/4	μs
Ratio	1:1:2:1:1/3:1:1	
Input amplitude	15/20/30	V
Output amplitude	$\geq 13 / \geq 8.8 / \geq 8.8$	V
Load impedance	100	Ω
Leading edge time	≤ 0.2	μs
Main circuit operating voltage	380	V
Weight		g


Connection diagram:

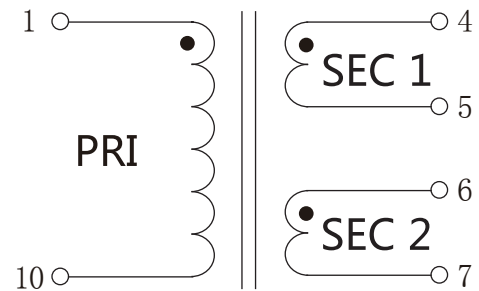

Dimensions (in mm) :

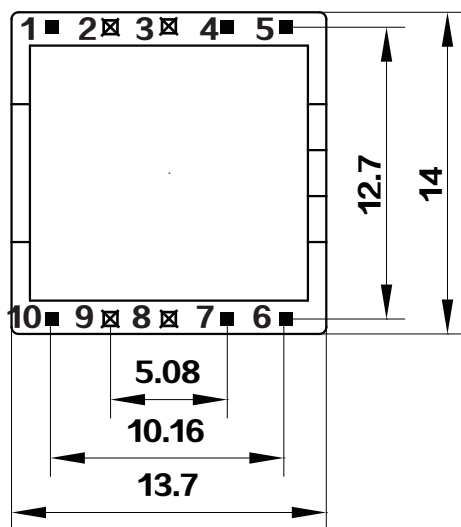

Front View

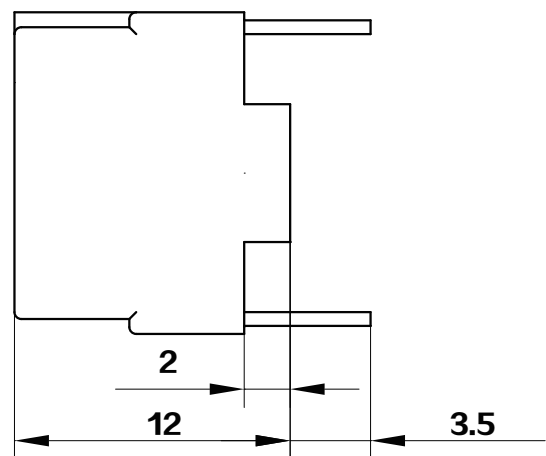

Bottom View