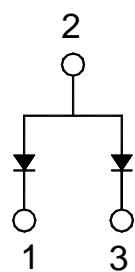
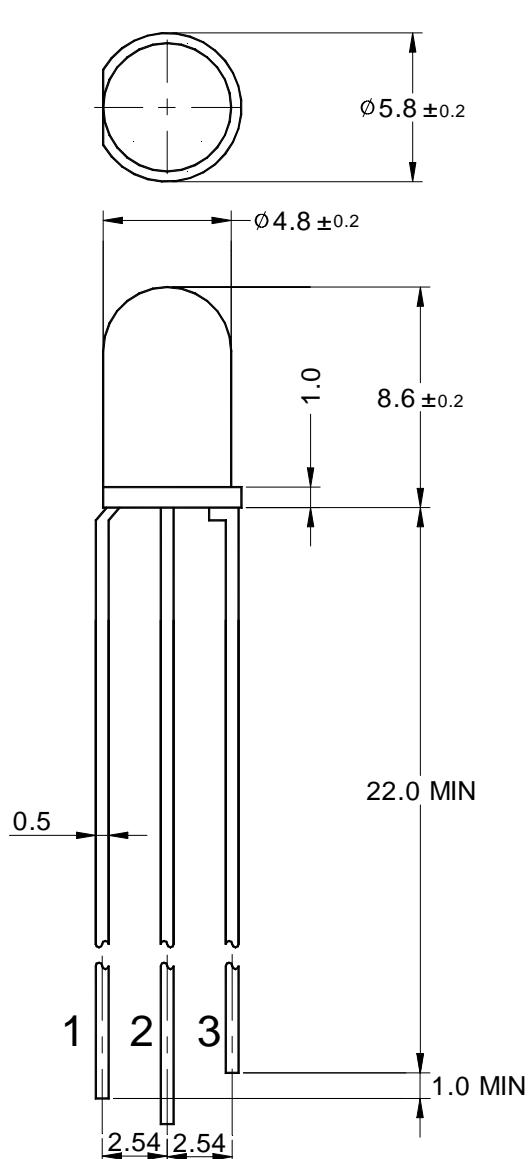


Features

- Milky diffusion lens type
- $\phi 5\text{mm}$ (T-13/4) all plastic mold type
- Radiation color (Red, Green)
- Low power consumption

Outline Dimensions

unit : mm



PIN Connections
1.Y-Green
2.Common Anode
3.Red

Absolute maximum ratings

Characteristic	Symbol	Ratings	Unit
Power Dissipation	P_D	85	mW
Forward Current	I_F	30	mA
* ¹ Peak Forward Current	I_{FP}	50	mA
Reverse Voltage	V_R	4	V
Operating Temperature	T_{opr}	-25 85	
Storage Temperature	T_{stg}	-30 100	
* ² Soldering Temperature	T_{sol}	260 for 5 seconds	

*1.Duty ratio = 1/16, Pulse width = 0.1ms

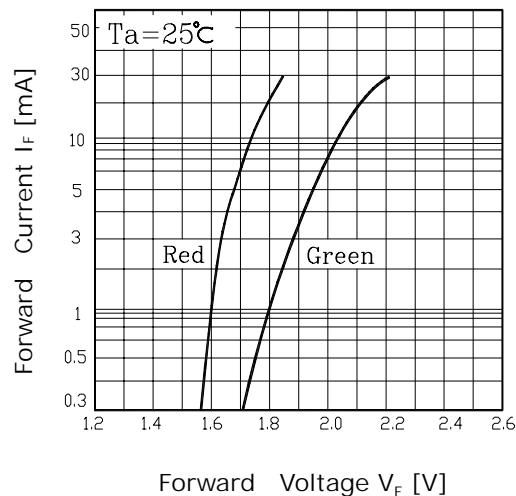
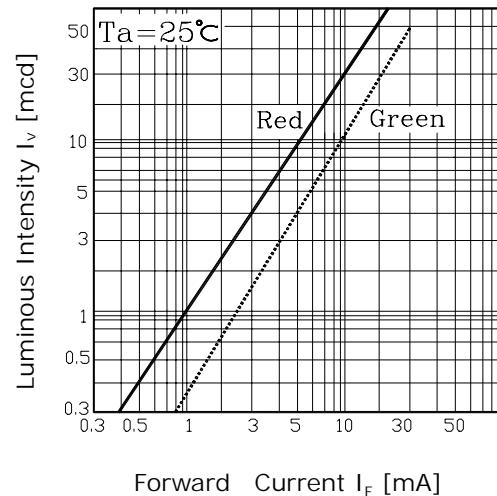
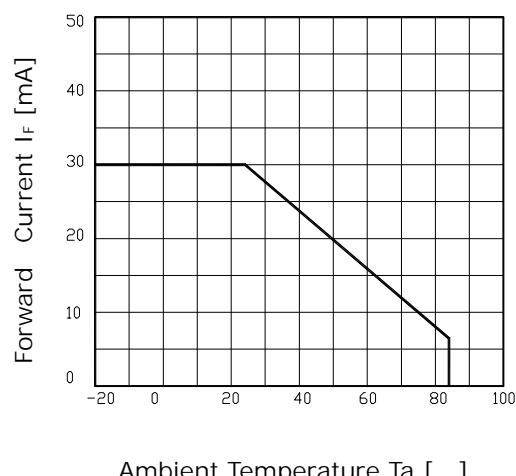
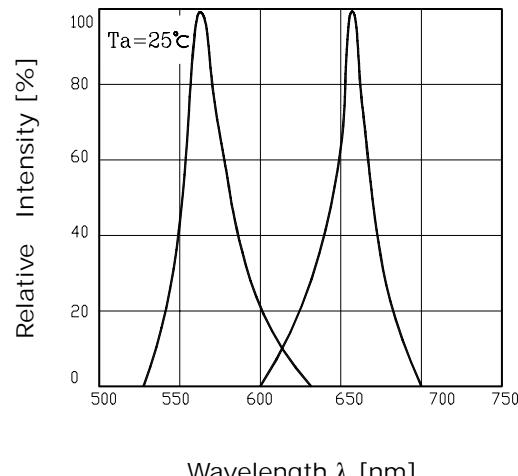
*2.Recommended soldering condition ⇒ Attached

Electrical Characteristics

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F = 20mA$	-	1.8	2.5	V
			-	2.1	2.8	
Luminous Intensity	I_V	$I_F = 20mA$	-	60	-	mcd
			-	25	-	
Peak Wavelength	λ_P	$I_F = 20mA$	-	660	-	nm
			-	570	-	
Spectrum Bandwidth		$I_F = 20mA$	-	20	-	nm
			-	30	-	
Reverse Current	I_R	$V_R = 4V$	-	-	10	uA
* ³ Half angle	$\theta_{1/2}$	$I_F = 20mA$	-	± 20	-	deg

*3. $\theta_{1/2}$ is the off-axis angle where the luminous intensity is 1/2 the peak intensity

Characteristic Diagrams

Fig. 1 I_F - V_F**Fig. 2 I_V - I_F****Fig. 3 I_F – Ta****Fig.4 Spectrum Distribution****Fig. 5 Radiation Diagram**