


Features

- Ultra-Fast Switching Speed
- High Reverse Breakdown Voltage
- Low Forward Voltage Drop
- Guard Ring Junction Protection

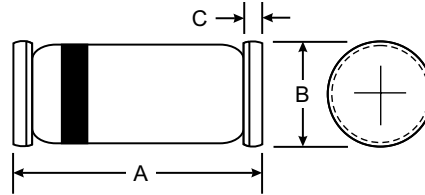

Mechanical Data

- Case: MiniMELF, Glass
- Terminals: Solderable per MIL-STD-202, Method 208
- Marking: Cathode Band Only
- Polarity: Cathode Band
- Weight: 0.05 grams (approx.)

MiniMELF		
Dim	Min	Max
A	3.30	3.70
B	1.30	1.60
C	0.28	0.50
All Dimensions in mm		

Maximum Ratings @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	LL5711	Unit
Peak Repetitive Reverse Voltage	V _{RRM}	70	V
Working Peak Reverse Voltage	V _{RWM}		
DC Blocking Voltage	V _R		
RMS Reverse Voltage	V _{R(RMS)}	49	V
Forward Continuous Current (Note 1)	I _{FM}	15	mA
Power Dissipation (Note 1)	P _d	250	mW
Thermal Resistance, Junction to Ambient Air (Note 1)	R _{θJA}	600	K/W
Operating and Storage Temperature Range	T _J , T _{STG}	-65 to +175	°C

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Min	Max	Unit	Test Condition
Reverse Breakdown Voltage	V _{(BR)R}	70	—	V	I _R = 10μA
Reverse Leakage Current	I _R	—	200	nA	V _R = 50V
Forward Voltage Drop	V _F	—	0.41 1.00	V	I _F = 1.0mA I _F = 15mA
Junction Capacitance	C _j	—	2.0	pF	V _R = 0V, f = 1.0MHz
Reverse Recovery Time	t _{rr}	—	1.0	ns	I _F = I _R = 5.0mA, I _{rr} = 0.1 x I _R , R _L = 100Ω

Note: 1. Valid provided that electrodes are kept at ambient temperature.