



DC COMPONENTS CO., LTD.
RECTIFIER SPECIALISTS

**HER201
THRU
HER208**

TECHNICAL SPECIFICATIONS OF HIGH EFFICIENCY RECTIFIER
VOLTAGE RANGE - 50 to 1000 Volts CURRENT - 2.0 Amperes

FEATURES


- * Low power loss, high efficiency
- * Low leakage
- * Low forward voltage drop
- * High current capability
- * High speed switching
- * High surge capability
- * High reliability

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: MIL-STD-202E, Method 208 guaranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 0.4 gram



DO-15

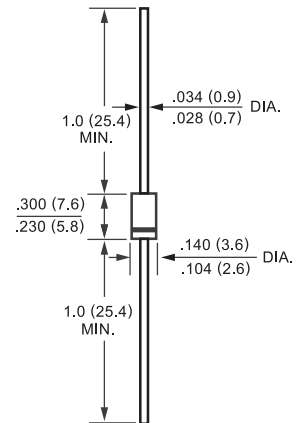

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

| | SYMBOL | HER201 | HER202 | HER203 | HER204 | HER205 | HER206 | HER207 | HER208 | UNITS |
|---|-----------------------------------|--------------|--------|--------|--------|--------|--------|--------|--------|-------|
| Maximum Recurrent Peak Reverse Voltage | V _{RRM} | 50 | 100 | 200 | 300 | 400 | 600 | 800 | 1000 | Volts |
| Maximum RMS Voltage | V _{RMS} | 35 | 70 | 140 | 210 | 280 | 420 | 560 | 700 | Volts |
| Maximum DC Blocking Voltage | V _{bc} | 50 | 100 | 200 | 300 | 400 | 600 | 800 | 1000 | Volts |
| Maximum Average Forward Rectified Current at T _A = 50°C | I _o | 2.0 | | | | | | | | Amps |
| Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method) | I _{FSM} | 60 | | | | | | | | Amps |
| Maximum Instantaneous Forward Voltage at 2.0A DC | V _F | 1.0 | | 1.3 | | 1.7 | | | | Volts |
| Maximum DC Reverse Current at Rated DC Blocking Voltage T _A = 25°C | I _R | 5.0 | | | | | | | | uAmps |
| Maximum Full Load Reverse Current Average, Full Cycle .375*(9.5mm) lead length at T _L = 55°C | | 100 | | | | | | | | uAmps |
| Maximum Reverse Recovery Time (Note 1) | t _{rr} | 50 | | | | 75 | | | | nSec |
| Typical Junction Capacitance (Note 2) | C _J | 30 | | | | 20 | | | | pF |
| Operating and Storage Temperature Range | T _J , T _{STG} | -65 to + 150 | | | | | | | | °C |

NOTES : 1. Test Conditions: I_F = 0.5A, I_R = 1.0A, I_{RR} = 0.25A
2. Measured at 1 MHz and applied reverse voltage of 4.0 volts

RATING AND CHARACTERISTIC CURVES (HER201 THRU HER208)

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

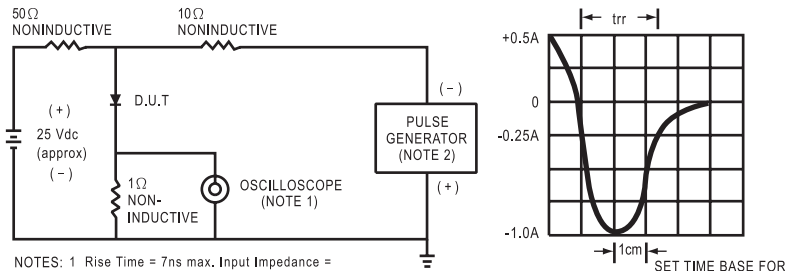

NOTES: 1 Rise Time = 7ns max. Input Impedance = 1 megohm. 22pF.
 2. Rise Time = 10ns max. Source Impedance = 50 ohms.

FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

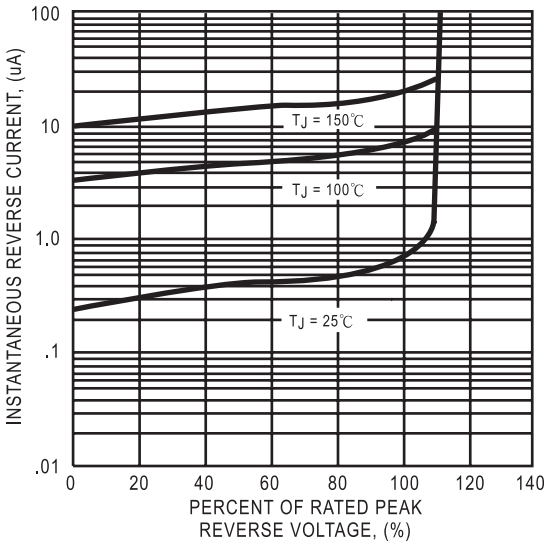


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

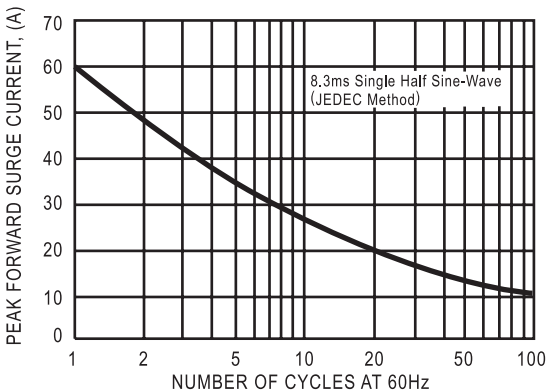


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

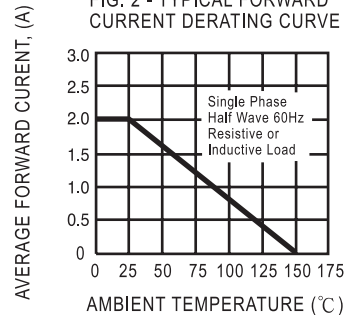


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS


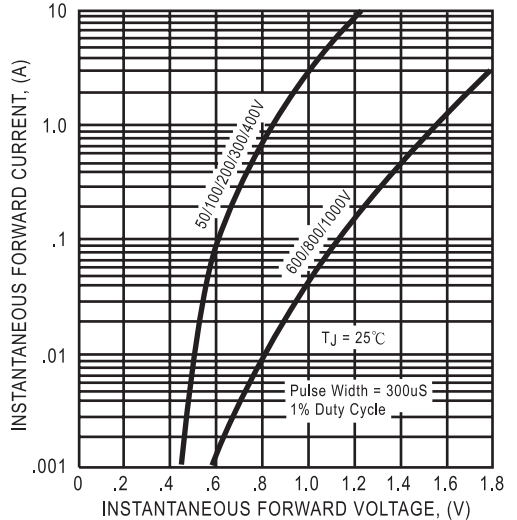


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

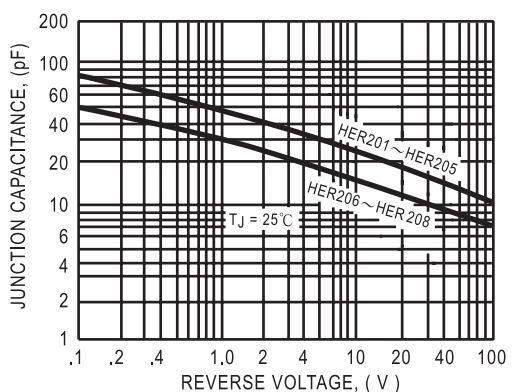

DC COMPONENTS CO., LTD.