

$I_{F(AV)} = 10\text{Amp}$   
 $V_R = 45\text{V}$

**Major Ratings and Characteristics**


Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	10	A
$V_{RRM}$	45	V
$I_{FSM}$ @tp = 5 $\mu$ s sine	400	A
$V_F$ @10Apk, $T_J = 125^\circ\text{C}$	0.53	V
$T_J$ range	-40 to 175	$^\circ\text{C}$

**Description/ Features**

The 10WQ045FN surface mount Schottky rectifier has been designed for applications requiring low forward drop and small foot prints on PC board. Typical applications are in disk drives, switching power supplies, converters, free-wheeling diodes, battery charging, and reverse battery protection.

- Popular D-PAK outline
- Small foot print, surface mountable
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead-Free ("PbF" suffix)

**Case Styles**



**D-PAK (TO-252AA)**

## Voltage Ratings

Part number	10WQ045FNPbF
$V_R$ Max. DC Reverse Voltage (V)	45
$V_{RWM}$ Max. Working Peak Reverse Voltage (V)	

## Absolute Maximum Ratings

Parameters	10WQ...	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 5	10	A	50% duty cycle @ $T_C = 157^\circ\text{C}$ , rectangular wave form
$I_{FSM}$ Max. Peak One Cycle Non-Repet. Surge Current * See Fig. 7	400	A	5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse
	75		10ms Sine or 6ms Rect. pulse
$E_{AS}$ Non-Repetitive Avalanche Energy	20	mJ	$T_J = 25^\circ\text{C}$ , $I_{AS} = 3.0$ Amps, $L = 4.40$ mH
$I_{AR}$ Repetitive Avalanche Current	3.0	A	Current decaying linearly to zero in 1 $\mu\text{sec}$ Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical

## Electrical Specifications

Parameters	10WQ...	Units	Conditions
$V_{FM}$ Max. Forward Voltage Drop * See Fig. 1 (1)	0.630	V	@ 10A $T_J = 25^\circ\text{C}$
	0.800	V	@ 20A $T_J = 25^\circ\text{C}$
	0.530	V	@ 10A $T_J = 125^\circ\text{C}$
	0.710	V	@ 20A $T_J = 125^\circ\text{C}$
$I_{RM}$ Max. Reverse Leakage Current * See Fig. 2 (1)	1	mA	$T_J = 25^\circ\text{C}$ $V_R = \text{rated } V_R$
	15	mA	$T_J = 125^\circ\text{C}$ $V_R = \text{rated } V_R$
$V_{F(TO)}$ Threshold Voltage	0.255	V	$T_J = T_J \text{ max.}$
$r_t$ Forward Slope Resistance	22	m $\Omega$	
$C_T$ Typical Junction Capacitance	760	pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$
$L_S$ Typical Series Inductance	5.0	nH	Measured lead to lead 5mm from package body

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

## Thermal-Mechanical Specifications

Parameters	10WQ...	Units	Conditions
$T_J$ Max. Junction Temp. Range (*)	- 40 to 175	$^\circ\text{C}$	
$T_{stg}$ Max. Storage Temperature Range	- 40 to 175	$^\circ\text{C}$	
$R_{thJC}$ Max. Thermal Resistance Junction to Case	2.0	$^\circ\text{C}/\text{W}$	DC operation * See Fig. 4
$R_{thJA}$ Max. Thermal Resistance Junction to Ambient	50	$^\circ\text{C}/\text{W}$	
wt Approximate Weight	0.3(0.01)	g(oz.)	
Case Style	D - PAK		Similar to TO-252AA
Marking Device	10WQ045FN		

(\*)  $\frac{dP_{tot}}{dT_J} < \frac{1}{R_{th(j-a)}}$  thermal runaway condition for a diode on its own heatsink

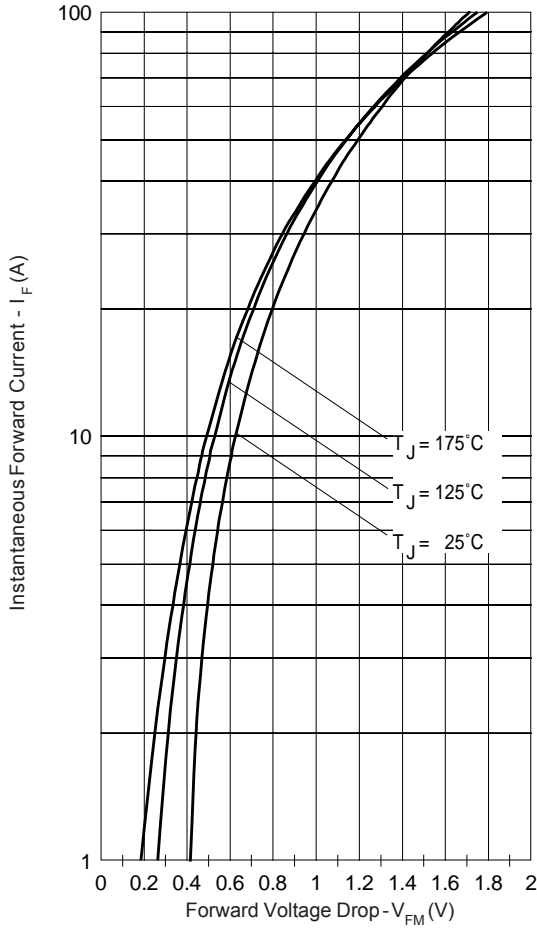


Fig. 1 - Maximum Forward Voltage Drop Characteristics

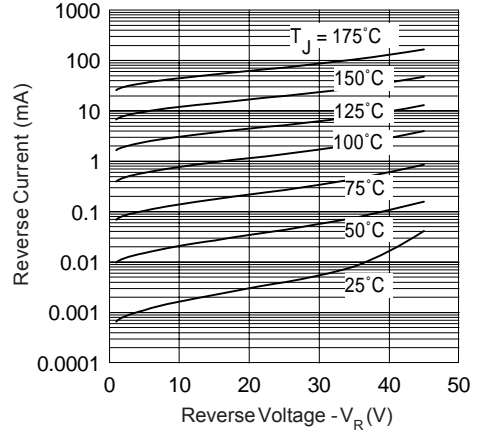


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

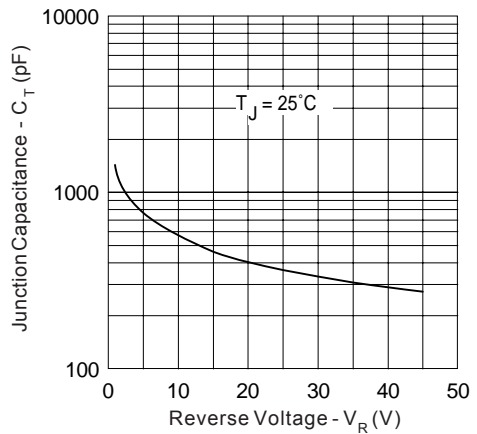


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

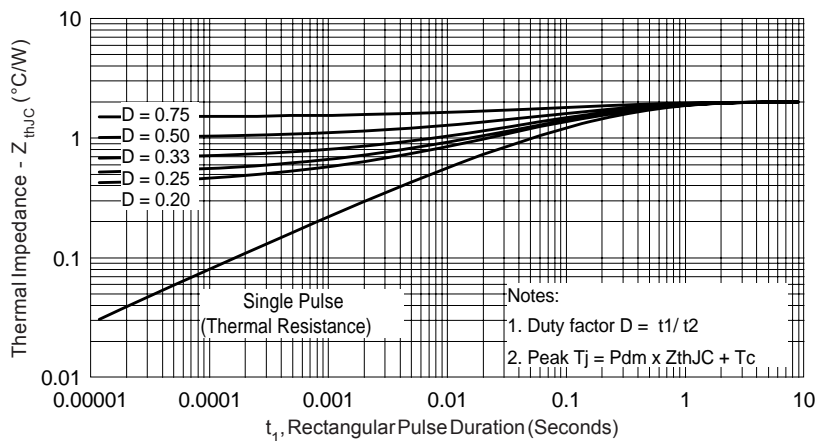


Fig. 4 - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics

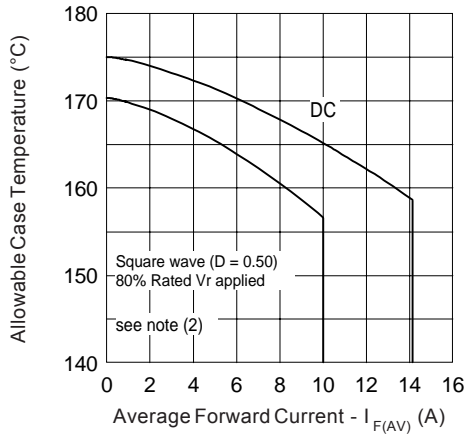


Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

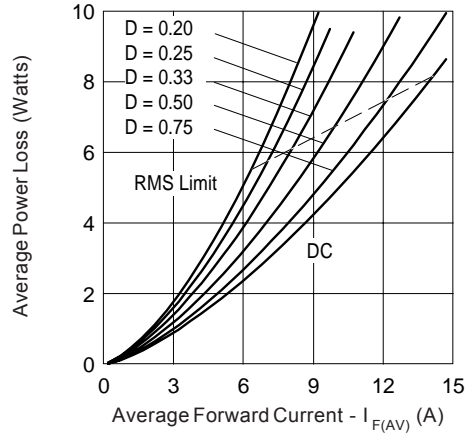


Fig. 6 - Forward Power Loss Characteristics

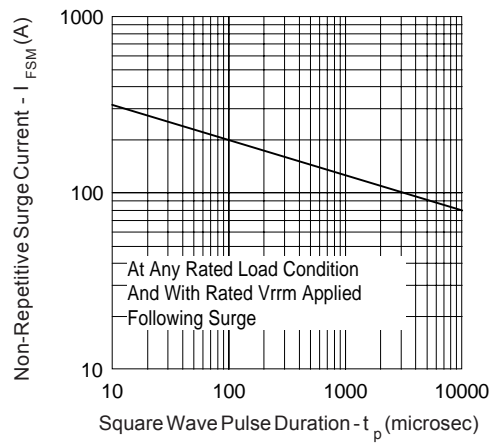


Fig. 7 - Maximum Non-Repetitive Surge Current

(2) Formula used:  $T_c = T_j - (Pd + Pd_{REV}) \times R_{thJC}$ ;

$Pd = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)}/D)$  (see Fig. 6);

$Pd_{REV} = \text{Inverse Power Loss} = V_{R1} \times I_R (1-D)$ ;  $I_R @ V_{R1} = 80\% \text{ rated } V_R$

Outline Table

**NOTES:**  
 1- DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994  
 2- DIMENSIONS ARE SHOWN IN INCHES [MILLIMETERS]  
 3- LEAD DIMENSION UNCONTROLLED IN L.S.  
 4- DIMENSION D1, E1, L3 & Q2 ESTABLISH A MINIMUM MOUNTING SURFACE FOR THERMAL PAD.  
 5- SECTION C-C DIMENSIONS APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN .025 AND .010 [0.13 AND 0.25] FROM THE LEAD TIP.  
 6- DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED .006 [0.15] PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTMOST EXTREMES OF THE PLASTIC BODY.  
 7- DIMENSION W1 & W2 APPLIED TO BASE METAL ONLY.  
 8- DATUM A & B TO BE DETERMINED AT DATUM PLANE H.  
 9- OUTLINE CONFORMS TO JEDEC OUTLINE 10-252AA.

DIM	DIMENSIONS		TYP
	MILLIMETERS	INCHES	
A	2.18	2.39	.096
A1	-	0.13	-.005
b	0.64	0.69	.026
b1	0.65	0.79	.026
b2	0.76	1.14	.030
b3	4.95	5.46	.196
c	0.46	0.61	.018
c1	0.41	0.56	.016
c2	0.46	0.89	.018
D	5.97	6.22	.235
D1	5.21	-	.205
E	6.35	6.75	.250
E1	4.32	-	.170
h	2.29	BSC	.090
H	8.40	10.41	.330
L	1.40	1.78	.055
L1	2.74	BSC	.108
L2	0.93	BSC	.020
L3	0.89	1.27	.035
L4	-	1.02	.040
L5	1.14	1.52	.045
W	0"	10"	0"
W1	0"	15"	0"
W2	25"	35"	20"

**LEAD ASSIGNMENTS**  
 1- GATE  
 2- DRAIN  
 3- SOURCE  
 4- DRAIN

**IGBT & CoPAK**  
 1- GATE  
 2- COLLECTOR  
 3- EMITTER  
 4- COLLECTOR

**Modified JEDEC outline TO-252AA**  
 Dimensions in millimeters and (inches)

Part Marking Information

EXAMPLE: THIS IS A 10WQ045FN  
 LOT CODE 8024  
 ASSEMBLED ON WW 02, 2000


INTERNATIONAL  
 RECTIFIER  
 LOGO

ASSEMBLY  
 LOT CODE

PART NUMBER

DATE CODE  
 P = LEAD-FREE  
 YEAR 0 = 2000  
 WEEK 02  
 X = SITE ID

Tape & Reel Information

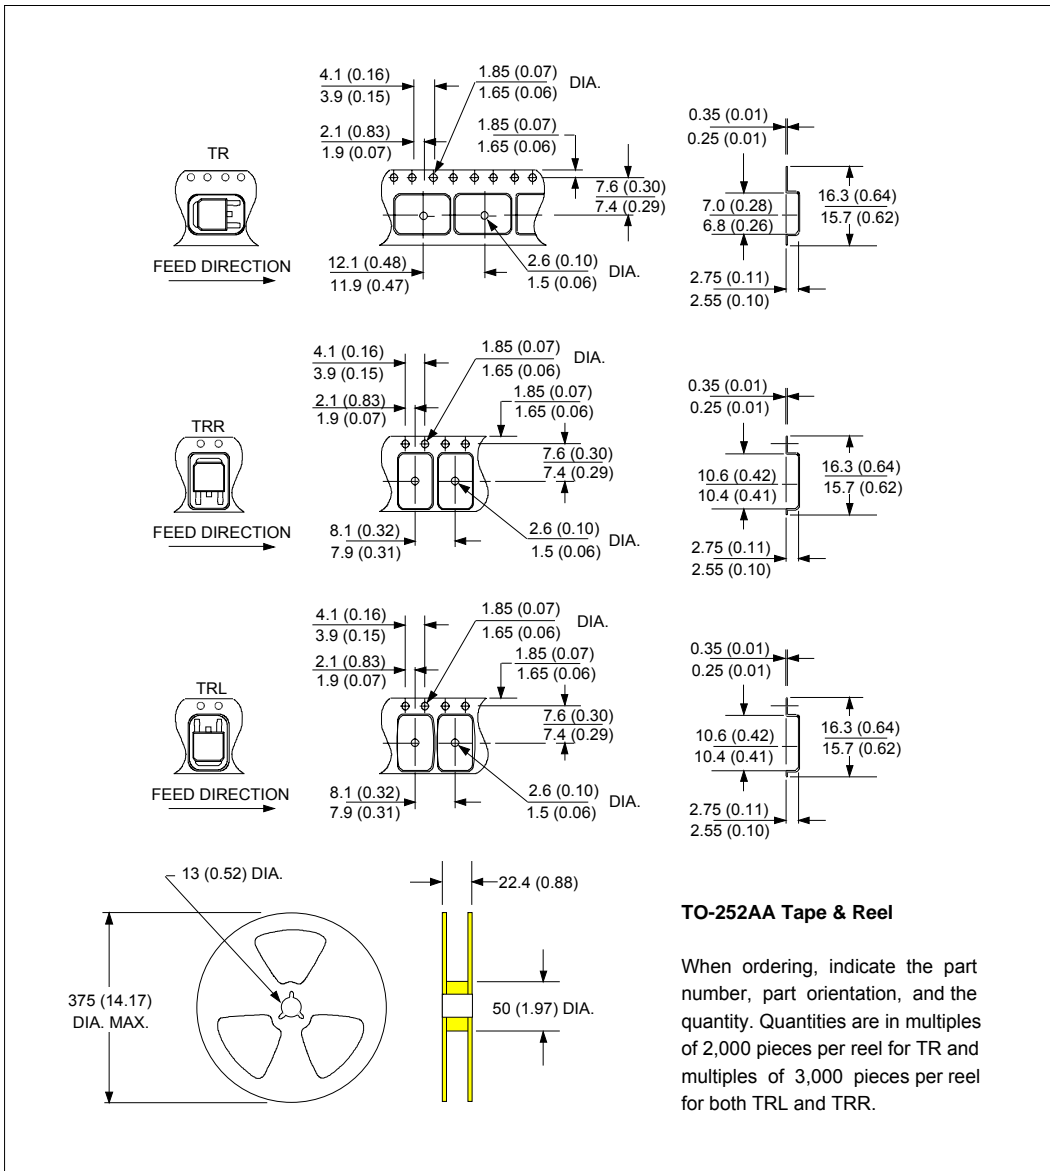

Ordering Information Table

Device Code															
	<table border="1" style="margin: auto;"> <tr> <td style="padding: 5px;">10</td> <td style="padding: 5px;">W</td> <td style="padding: 5px;">Q</td> <td style="padding: 5px;">045</td> <td style="padding: 5px;">FN</td> <td style="padding: 5px;">TRL</td> <td style="padding: 5px;">PbF</td> </tr> <tr> <td style="text-align: center;">①</td> <td style="text-align: center;">②</td> <td style="text-align: center;">③</td> <td style="text-align: center;">④</td> <td style="text-align: center;">⑤</td> <td style="text-align: center;">⑥</td> <td style="text-align: center;">⑦</td> </tr> </table>	10	W	Q	045	FN	TRL	PbF	①	②	③	④	⑤	⑥	⑦
10	W	Q	045	FN	TRL	PbF									
①	②	③	④	⑤	⑥	⑦									
<b>1</b>	- Current Rating (10A)														
<b>2</b>	- Package Identifier W = D-Pak														
<b>3</b>	- Schottky "Q" Series														
<b>4</b>	- Voltage Rating (045 = 45V)														
<b>5</b>	- FN = TO-252AA (D-Pak)														
<b>6</b>	- <ul style="list-style-type: none"> <li>• none = Tube (50 pieces)</li> <li>• TR = Tape &amp; Reel</li> <li>• TRL = Tape &amp; Reel (Left Oriented)</li> <li>• TRR = Tape &amp; Reel (Right Oriented)</li> </ul>														
<b>7</b>	- <ul style="list-style-type: none"> <li>• none = Standard Production</li> <li>• PbF = Lead-Free</li> </ul>														

Data and specifications subject to change without notice.  
 This product has been designed and qualified for AEC Q101 Level and Lead-Free.  
 Qualification Standards can be found on IR's Web site.