


NPN General Purpose Amplifier

MMBT2222

FEATURES

- Epitaxial planar die construction.
- Ultra-small surface mount package.

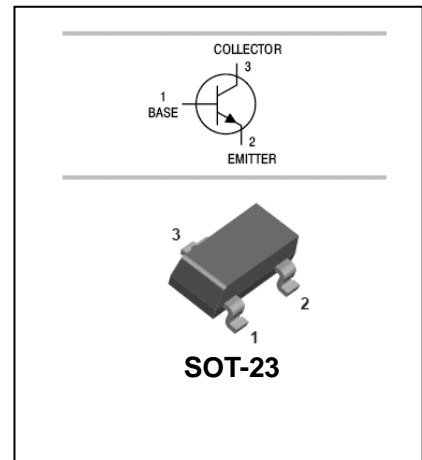

APPLICATIONS

- Use as a medium power amplifier.
- Switching requiring collector currents up to 500mA.

ORDERING INFORMATION

Type No.	Marking	Package Code
MMBT2222	M1B	SOT-23

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	60	V
V_{CEO}	Collector-Emitter Voltage	30	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current -Continuous	600	mA
P_C	Collector Dissipation	350	mW
T_j, T_{stg}	Junction and Storage Temperature	-55to+150	°C

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

NPN General Purpose Amplifier







MMBT2222

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=10\mu A$ $I_E=0$	60			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=10mA$ $I_B=0$	30			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=10\mu A$ $I_C=0$	5			V
Collector cut-off current	I_{CBO}	$V_{CB}=50V$ $I_E=0$			0.01	μA
Collector cut-off current	I_{CEO}	$V_{CE}=10V$ $I_{BE(off)}=0$			0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=3V$ $I_C=0$			0.1	μA
DC current gain	h_{FE}	$V_{CE}=10V$ $I_C=150mA$	100		300	
		$V_{CE}=10V$ $I_C=0.1mA$	35			
		$V_{CE}=10V$ $I_C=500mA$	30			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=500mA$ $I_B=50mA$			1.6	V
		$I_C=150mA$ $I_B=15mA$			0.4	
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=500mA$ $I_B=50mA$			2.6	V
Transition frequency	f_T	$V_{CE}=20V$ $I_C=20mA$ $f=100MHz$	250			MHz
Delay time	t_d	$V_{CC}=30V$, $V_{BE(off)}=-0.5V$ $I_C=150mA$, $I_{B1}=15mA$			10	ns
Rise time	t_r				25	ns
Storage time	t_s	$V_{CC}=30V$, $I_C=150mA$			225	ns
Fall time	t_f	$I_{B1}=-I_{B2}=15mA$			60	ns

NPN General Purpose Amplifier

MMBT2222

TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

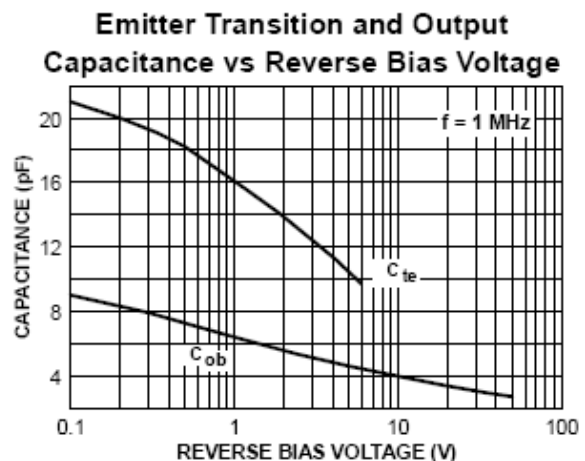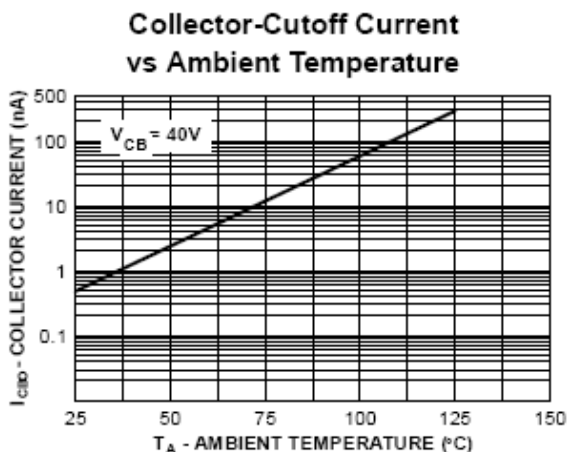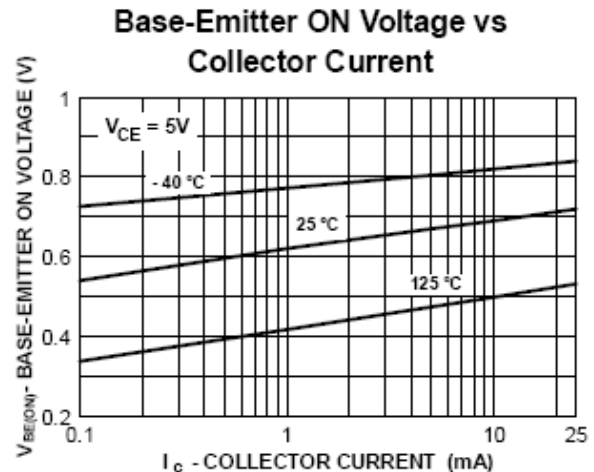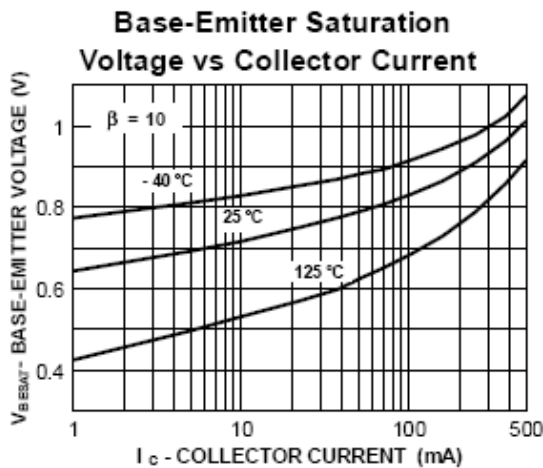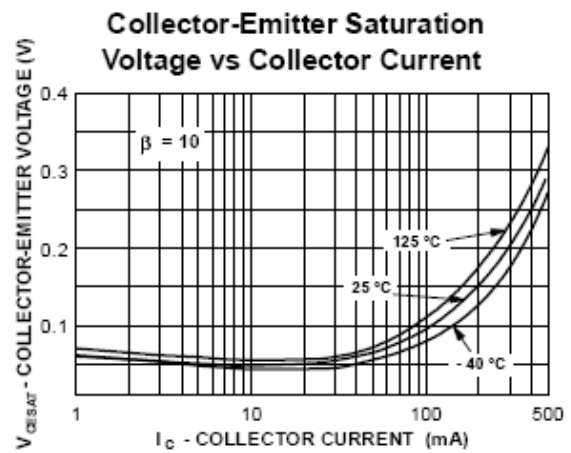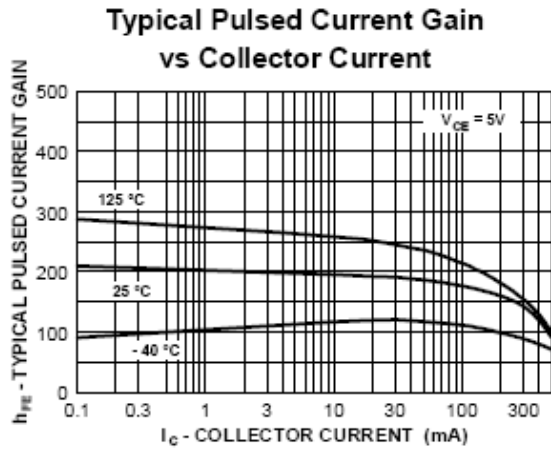


NPN General Purpose Amplifier

MMBT2222


PACKAGE OUTLINE

Plastic surface mounted package

SOT-23

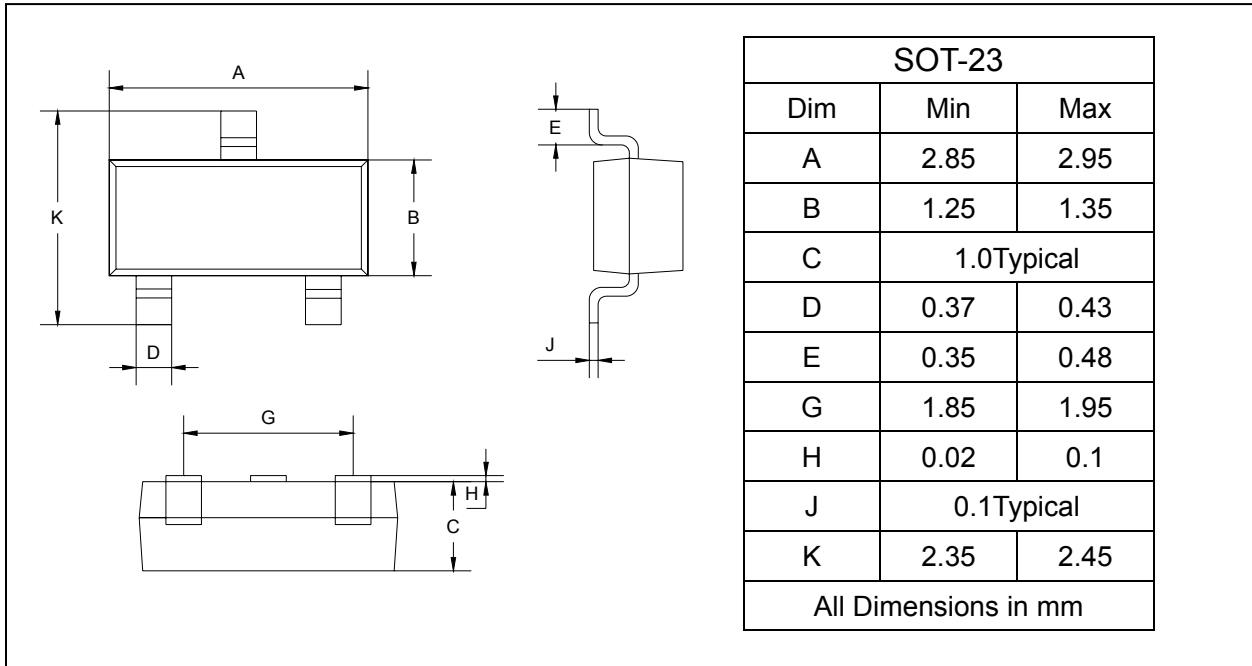

SOLDERING FOOTPRINT

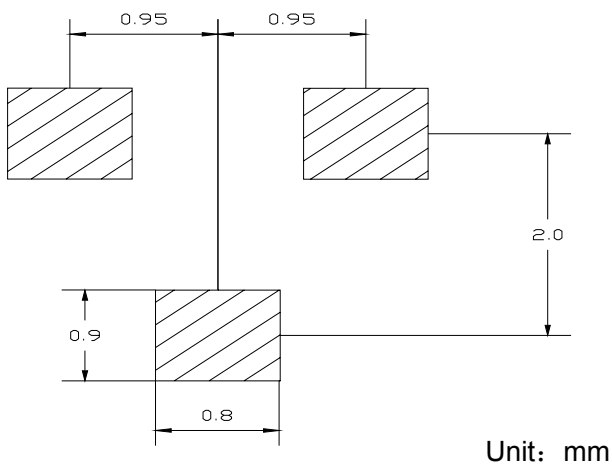

PACKAGE INFORMATION

Device	Package	Shipping
MMBT2222	SOT-23	3000/Tape&Reel