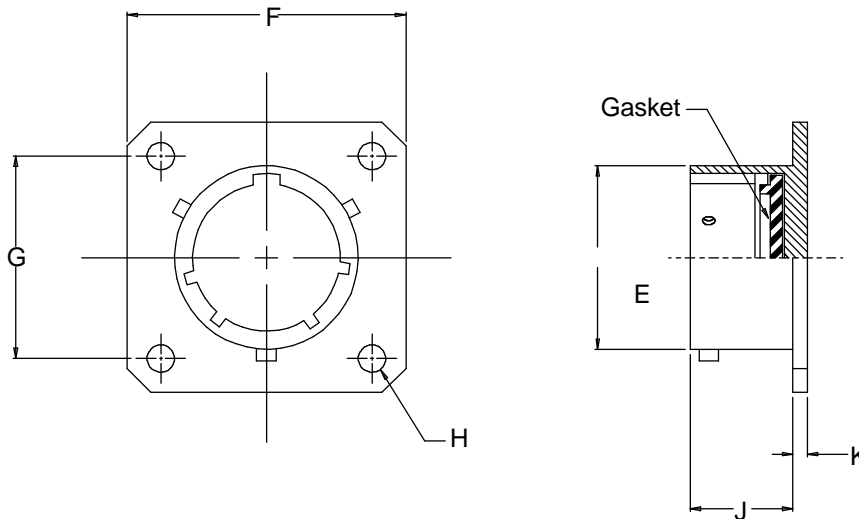


**MIL-C-26482**
**MIL-C-83723**  
**Series I Bayonet**

**650DS001 B 16**  
 Basic Part No. \_\_\_\_\_  
 Finish (Table IV) \_\_\_\_\_  
 Shell Size \_\_\_\_\_


**TABLE III: DIMENSIONS**

Shell Size	E Dia	F Max	G	H Dia ±.010 (0.3)	J	K
08	.471 (12.0)	.828 (21.0)	.594 (15.1)	.120 (3.0)	.478 (12.1)	.062 (1.6)
10	.588 (14.9)	.954 (24.2)	.719 (18.3)	.120 (3.0)	.478 (12.1)	.062 (1.6)
12	.748 (19.0)	1.047 (26.6)	.812 (20.6)	.120 (3.0)	.478 (12.1)	.062 (1.6)
14	.873 (22.2)	1.141 (29.0)	.906 (23.0)	.120 (3.0)	.478 (12.1)	.062 (1.6)
16	.998 (25.3)	1.234 (31.3)	.969 (24.6)	.120 (3.0)	.478 (12.1)	.062 (1.6)
18	1.123 (28.5)	1.328 (33.7)	1.062 (27.0)	.120 (3.0)	.478 (12.1)	.062 (1.6)
20	1.248 (31.7)	1.453 (36.9)	1.156 (29.4)	.120 (3.0)	.572 (14.5)	.094 (2.4)
22	1.373 (34.9)	1.578 (40.1)	1.250 (31.8)	.120 (3.0)	.572 (14.5)	.094 (2.4)
24	1.498 (38.0)	1.703 (43.3)	1.375 (34.9)	.147 (3.7)	.605 (15.4)	.094 (2.4)

**TABLE IV: STANDARD FINISHES**

Finish Symbol	Finish
B	Cadmium Olive Drab
C	Anodize, Black
M	Electroless nickel
NF	500 hr Cadmium Olive Drab

1. For complete dimensions see Military Standard MS3115.
2. Metric dimensions (mm) are indicated in parentheses.