








REVISIONS			
REV	ECN, ERN NO.	DATE	APPRD.
J	PRODUCT DRAWING (EAR13166)	SEP26/07	K.L.

ORDERING CODE: FCC17-E09PM-440G

SERIES
SIZE/NUMBER OF CONTACTS
 E09, A15, B25, OR C37
CONNECTOR STYLE
 P = PIN
 S = SOCKET
TERMINATION TYPE
 M = SOLDER CUP

CONTACT FINISH/GOLD THICKNESS
 NO DIGIT = STANDARD 15 MICRONS
 [0.38 MICRONS] GOLD
 G = 50 MICRONS [1.27 MICRONS] GOLD
MODIFIER
 0 = STANDARD
FILTER CAPACITANCE
 D = 50 pF 5 = 1000 pF
 B = 100 pF 7 = 1200 pF
 0 = 180 pF E = 2200 pF
 F = 330 pF 9 = 5600 pF
 L = 380 pF 8 = 47000 pF
 1 = 470 pF N = NO FILTERS
 4 = 820 pF
 REFER TO AMPHENOL CATALOGUE FOR FILTER PERFORMANCE CHARACTERISTICS

MOUNTING
 2 = .120[3.05] DIA THROUGH HOLE
 3 = #4-40 UNC SELF-LOCKING THREAD
 4 = #4-40 UNC THREAD
 6 = M3 x 0.5 THREAD
 E = CODE 4 MOUNTING WITH #4-40 UNC HEX JACK SOCKET SUPPLIED LOOSE

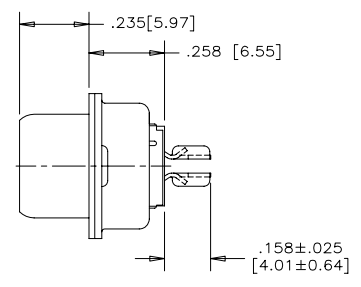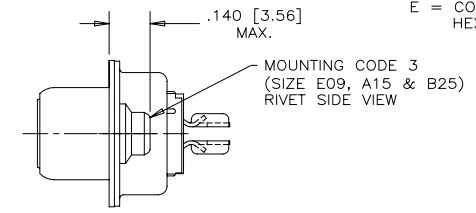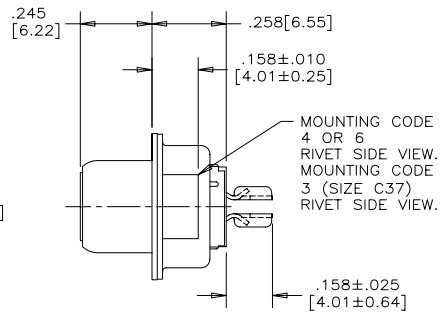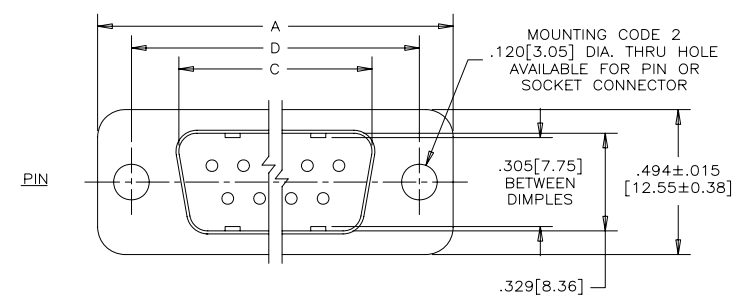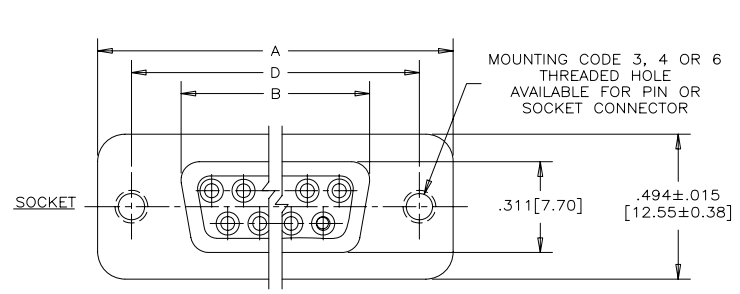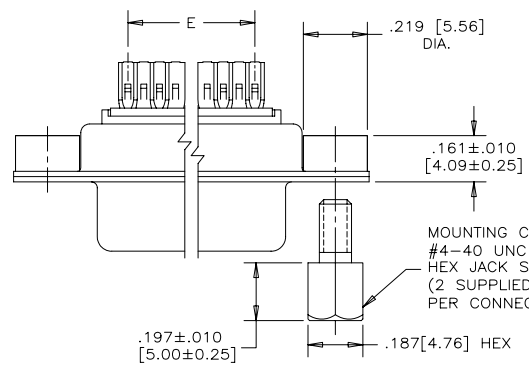

NOTES:

- MATERIALS: - SHELLS - TIN PLATED STEEL
 - CONTACTS - PHOSPHOR BRONZE PLATED WITH GOLD OVER NICKEL ON THE MATING AREA AND TIN-LEAD ON THE TERMINALS
 - INSULATOR - ENGINEERING THERMOPLASTIC, FLAMMABILITY RATING UL94V-0, BLACK.
- CONTACT RESISTANCE: 15 MILLIOHMS MAXIMUM.
- INSULATION RESISTANCE: 3000 MEGOHMS MINIMUM
- CURRENT RATING: 5 AMPS MAXIMUM
 2 AMPS FILTERING MAXIMUM
- OPERATING TEMPERATURE: -40°C TO 85°C.
- TOLERANCE, UNLESS INDICATED OTHERWISE, ±.005 [0.13].

SIZE	STYLE	A±.015 [0.38]	B±.005 [0.13]	C±.005 [0.13]	D±.005 [0.13]	E BSC.
E09	PIN	1.213 [30.81]	-----	.666[16.92]	.984 [24.99]	.432 [10.97]
	SOCKET		.643[16.33]	-----		
A15	PIN	1.541 [39.14]	-----	.994[25.25]	1.312 [33.32]	.756 [19.20]
	SOCKET		.971[24.66]	-----		
B25	PIN	2.088 [53.04]	-----	1.534[38.96]	1.852 [47.04]	1.304 [33.12]
	SOCKET		1.511[38.38]	-----		
C37	PIN	2.729 [69.32]	-----	2.182[55.42]	2.500 [63.50]	1.956 [49.68]
	SOCKET		2.159[54.84]	-----		

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

DRAWN I.ESSAJEE	DATE 98/03/09
DESIGNED K.LAMBIE	98/03/04
CHECKED	
I. E. APPRD.	
Q. A. APPRD.	
DWG. APPRD.	
ENG. REL. NO.	
REF.	
DIMENSIONS ARE IN INCHES [mm]	CODE ID. NO. 03554

Amphenol Canada Corp.	
TITLE FCC17 FILTERED D-SUB CONNECTOR, PIN & SOCKET, SOLDER CUP CONTACTS	
DWG C	DRAWING NO. P-FCC17-XXXXM-XXOX
SCALE 3/1	WT. ----- SURF. ----- SHEET 1 OF 1