


# PCLD-785 PCLD-785B PCLD-885

16-ch Relay Board

24-ch Relay Board

16-ch Power Relay Board

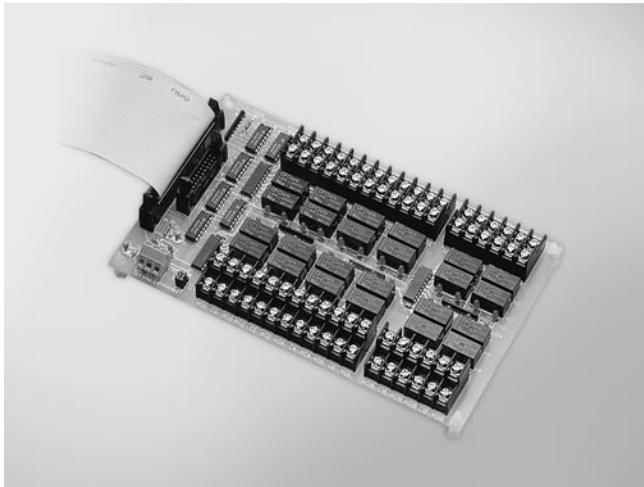

PCLD-785/B



## Features

- Compatible with PC-LabCard™ products with 20-pin digital output connector and 50-pin Opto-22 digital output connector (PCLD-785B only)
- Automatic selection of control logic (PCLD-785B only): Negative logic for the Opto-22 connector Positive logic for the 20-pin flat cable connector
- Screw terminals for easy output wiring
- LED status indicators

## Specifications

### Relay


- Channels** PCLD-785: 16 (CN1, 20-pin conn.)  
PCLD-785B: 16 (CN1, 20-pin conn.)  
24 (CN2, 50-pin conn.)
- Contact Ratings** 120 V<sub>AC</sub> @ 0.5 A, 30 V<sub>DC</sub> @ 1 A
- Contact Resistance** < 100 mΩ
- Operation Time** 5 ms max.
- Insulation Resistance** 100 MΩ
- Life Expectancy** AC: 5 x 10<sup>5</sup> @ 110 V/0.3 A  
DC: 5 x 10<sup>5</sup> @ 24 V/1.25 A
- Relay Type** SPDT (Single-Pole Double-Throw) Form C
- Release Time** 5 ms max.

### General

- Dimensions (L x W)** PCLD-785: 114 x 220 mm (4.5" x 8.7")  
PCLD-785B: 132 x 220 mm (5.2" x 8.7")
- Power Consumption** +5 V @ < 100 mA; +12 V @ 33 mA for each relay
- Connectors** 20-pin connector:  
+5 V<sub>DC</sub>: Jumper select either PC bus or external supply  
+12 V<sub>DC</sub>: Jumper select either PC bus or external supply  
50-pin connector: external 12 V supply

## Ordering Information

- PCLD-785** 16-ch Relay Board w/ One 1m 20-pin Flat Cable
- PCLD-785B** 24-ch Relay Board w/ 20-pin & 50-pin Flat Cables
- PCL-10120-1** 20-pin Flat Cable, 1 m
- PCL-10120-2** 20-pin Flat Cable, 2 m
- PCL-10150-1.2** 50-pin Flat Cable, 1.2 m

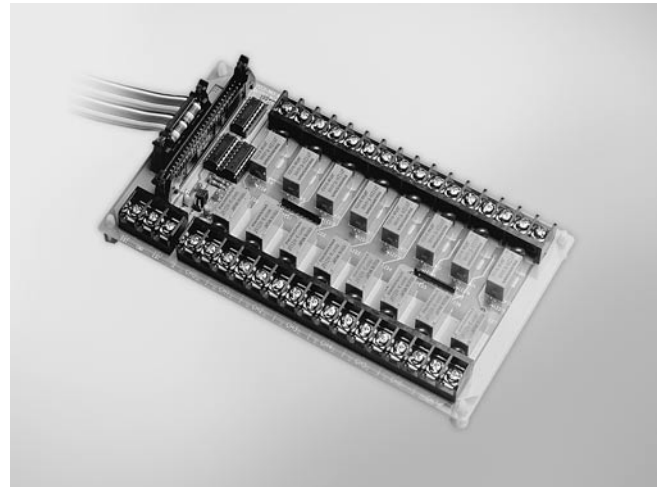

PCLD-885



## Features

- Accepts 20-pin or 50-pin (Opto-22 compatible) connectors
- 16 single-pole single-throw (SPST) relays
- High-power relay handles up to 5 A @ 250 V<sub>AC</sub>
- Onboard varistors protect all relay contact points
- Industrial screw terminals for ease of wiring
- LED status indicators
- +5 V/+12 V power/status LED indicator

## Specifications

### Relay

- Channels** 16
- Contact Rating** AC: 250 V @ 6 A  
DC: 30 V @ 5 A
- Contact Resistance** 30 mΩ max.
- Insulation Resistance** 1000 mΩ @ 500 V<sub>DC</sub>
- Life Expectancy** >100,000 cycles at rated load
- Relay On Time** 6 ms max.
- Relay Off Time** 3 ms max.
- Relay Type** SPST (Form A), normally open

### Varistor

- Clamping Voltage** 760 V (10 A)
- Max. Peak Current** 1,200 A for 8 msec.
- Max. Applied Voltage** 300 V<sub>RMS</sub> AC continuous
- Varistor Voltage** 470 V (current = 1 mA)

### General

- Power Consumption** 12 V @ 22 mA for each relay,  
352 mA if all relays energized; 5 V @ 200 mA max.
- Connectors** Input: 20-pin flat cable or 50-pin Opto-22 compatible  
Output: Barrier strip screw terminal
- Dimensions (L x W)** 205 x 114 mm (8" x 4.5")
- Operating Temperature** 0 ~ 60° C (32 ~ 140° F)

## Ordering Information

- PCLD-885** 16-ch Power Relay Board w/ 20p & 50p Flat Cables