



Solid State Devices, Inc.

14830 Valley View Blvd * La Mirada, Ca 90638


Phone: (562) 404-7855 * Fax: (562) 404-1773

ssdi@ssdi-power.com * www.ssdi-power.com

DESIGNER'S DATA SHEET

FEATURES:


- High Surge Rating
- Hermetically Sealed in Glass
- Available to TX, TXV, and Space Levels

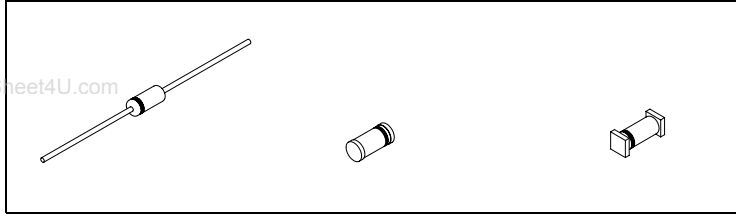


Maximum Ratings

CHARACTERISTICS	Symbol	Value	Units
Steady Off Voltage	V _{RWM}	3-370	V
Steady State Power Dissipation	P _D	3	W
Peak Pulse Power @ 1.0 msec	P _{PP}	150	W
Peak Pulse Power And Steady State Power Derating	See Graph		
Peak Pulse Power And Pulse Width	See Graph		
Operating and Storage Temperature	-65°C to + 175°C		


STEADY STATE POWER VS. TEMPERATURE DERATING CURVE

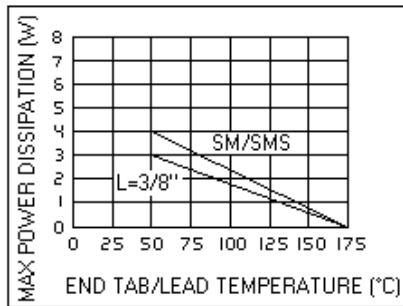

PEAK PULSE POWER VS. TEMPERATURE DERATING CURVE

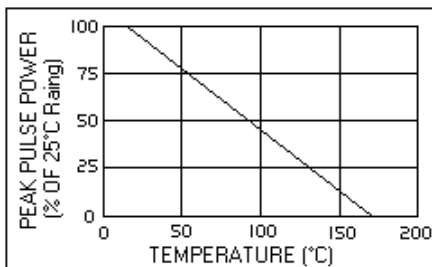


**150 WATT
7.5 – 510 VOLTS
TRANSIENT SUPPRESSOR**



DIM	MIN.	MAX
A	---	.085"
B	---	.170"
C	1.0"	---
D	.028"	.034"


AXIAL(L)

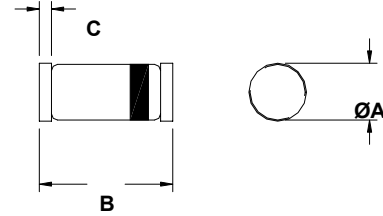

DIM	MIN	MAX
A	.077"	.083"
B	.130"	.146"
C	.010"	.022"

ROUND TAB (SM)

All dimensions are prior to soldering

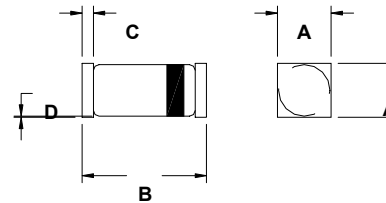

DIM	MIN.	MAX.
A	.090"	.100"
B	.175"	.215"
C	.022"	.028"
D	Body to Tab Clearance: .002"	

SQUARE TAB (SMS)

All dimensions are prior to soldering

Note:

SSDI's Transient Suppressors offer standard Breakdown Voltage Tolerance of ±10%(A) and ±5%(B). For other Voltages and Voltage Tolerances, contact SSDI's Marketing Department.

NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.



ST150A7.5 thru ST150A510

Solid State Devices, Inc.

14830 Valley View Blvd * La Mirada, Ca 90638

Phone: (562) 404-7855 * Fax: (562) 404-1773 ssdi@ssdi-power.com * www.ssdi-power.com

ELECTRICAL CHARACTERISTICS

PART NUMBER	Break Down (note 1)		MAX REVERSE STANDOFF		PEAK PULSE CLAMPING		MAXIMUM CONTINUOUS (NOTE 3)	DYNAMIC IMPEDANCE (NOTE 2)	MAXIMUM TEMPERATURE COEFFICIENT
	Nominal Voltage	Test Current	Voltage	Reverse Leakage Current	Voltage (max.)	@ Current tp=1ms (NOTE 4)			
	VBR	@IBRT	VRWM	IR @ VRWM	Vc	IPP	IRM	ZBR @ IBRT	TC @ 25°C
For 5% Voltage Tolerance Specify "B" in place "A"	Volts	mA	Volts	µA	Volts	A	mA	Ohms	%/°C
ST150A7.5	7.5	100	3	50	13.3	11.3	400	2	.07
ST150A8.2	8.2	100	4	10	14.8	10.1	360	2	.08
ST150A9.1	9.1	50	5	10	15.7	9.6	330	4	.08
ST150A10	10	50	7.1	7	17.0	8.8	300	4	.09
ST150A11	11	50	7.8	3	18.9	7.9	250	7	.10
ST150A12	12	50	8.6	2	20.9	7.2	230	7	.10
ST150A13	13	50	9.5	2	22.9	6.6	200	10	.10
ST150A15	15	50	10.5	1	25.6	5.9	185	10	.10
ST150A16	16	25	11.4	1	28.4	5.3	170	15	.11
ST150A18	18	25	12.4	1	31.0	4.8	150	15	.11
ST150A20	20	25	14.3	1	33.8	4.4	135	15	.11
ST150A22	22	25	15.5	1	38.1	3.9	125	15	.11
ST150A24	24	25	17.1	1	42.2	3.6	110	15	.11
ST150A27	27	25	19.0	1	46.2	3.2	100	15	.11
ST150A30	30	25	20	1	50.1	3.0	90	15	.11
ST150A33	33	10	23	1	54.1	2.8	85	15	.11
ST150A36	36	10	26	1	60.7	2.5	65	40	.11
ST150A39	39	10	29	1	65.5	2.3	60	40	.11
ST150A43	43	10	31	1	70.8	2.1	55	45	.13
ST150A47	47	10	34	1	78.6	1.9	50	45	.13
ST150A51	51	10	37	1	86.5	1.7	45	60	.13
ST150A56	56	10	41	1	94.4	1.6	40	60	.13
ST150A62	62	10	45	1	103	1.5	35	80	.13
ST150A68	68	10	49	1	114	1.3	30	80	.13
ST150A75	75	10	53	1	126	1.2	30	100	.13
ST150A82	82	10	59	1	139	1.1	25	100	.13
ST150A91	91	5	65	1	152	1.0	25	200	.13
ST150A100	100	5	71	1	167	0.90	20	200	.13
ST150A110	110	5	77	1	185	0.81	20	250	.13
ST150A120	120	5	86	1	204	0.73	20	250	.13
ST150A130	130	5	95	1	224	0.67	20	300	.13
ST150A150	150	5	105	1	249	0.60	18	300	.13
ST150A160	160	5	114	1	276	0.54	18	350	.13
ST150A180	180	5	124	1	305	0.50	15	400	.13
ST150A200	200	2	143	1	336	0.45	15	500	.13
ST150A220	220	2	152	1	380	0.40	15	750	.13
ST150A240	240	2	171	1	419	0.36	12	850	.13
ST150A270	270	2	190	1	459	0.33	12	1000	.13
ST150A300	300	2	210	1	498	0.30	11	1500	.14
ST150A330	330	2	230	1	537	0.26	10	1900	.14
ST150A360	360	2	260	1	603	0.25	9	2200	.14
ST150A390	390	2	290	1	655	0.23	8	2800	.14
ST150A430	430	2	310	1	707	0.21	7	3500	.15
ST150A470	470	2	340	1	789	0.19	7	4500	.15
ST150A510	510	2	370	1	882	0.17	6	5500	.16

NOTES:

† Suffix "L" for axial lead, "SM" for surface mount Round Tab. "SMS" for Square Tab.

- 1) All zener voltages are measured with an automated test set using a 35 msec test time. Longer or shorter test time will have a corresponding effect on the measured value due to heating effects.
- 2) Zener impedance is derived from the AC voltage divided by the AC current with RMS value of 10% of DC zener test current superimposed on the test current.
- 3) Ratings based on maximum zener voltage of individual units (leadless units). Multiply by 1.3 for SM and SMS devices.
- 4) Figures shown are for a peak sinusoidal surge current of 8.3 msec duration, non-repetitive. The 8.3 msec square pulse rating is 71% of the value shown.
- 5) SSDI standard marking consists of a contrasting color cathode dot or band. Part number information is included on packaging labels.

For optional high reliability screening or higher nominal zener voltages, consult SSDI MARKETING Department.

NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: T00001B

www.DataSheet4u.com

Doc