

Silicon NPN Power Transistors

2SD2599

DESCRIPTION

www.datasheet4u.com

- With TO-3P(H)IS package
- High voltage;high speed
- Low saturation voltage
- Bult-in damper diode

APPLICATIONS

- Horizontal deflection output for color TV

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

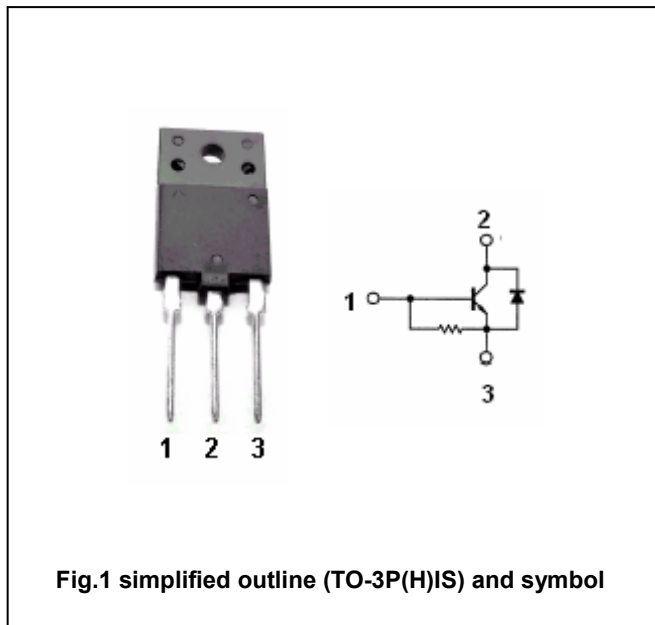


Fig.1 simplified outline (TO-3P(H)IS) and symbol

Absolute maximum ratings(Ta=25°C)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V <sub>CBO</sub>	Collector-base voltage	Open emitter	1500	V
V <sub>CEO</sub>	Collector-emitter voltage	Open base	600	V
V <sub>EBO</sub>	Emitter-base voltage	Open collector	5	V
I <sub>C</sub>	Collector current		3.5	A
I <sub>CM</sub>	Collector current-peak		7	A
I <sub>B</sub>	Base current		1	A
P <sub>C</sub>	Total power dissipation	T <sub>C</sub> =25°C	40	W
T <sub>j</sub>	Junction temperature		150	°C
T <sub>stg</sub>	Storage temperature		-55~150	°C

## Silicon NPN Power Transistors

## 2SD2599

## CHARACTERISTICS

www.datasheet4u.com

 $T_j=25^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_C=300\text{mA}; I_B=0$	5			V
$V_{CEsat}$	Collector-emitter saturation voltage	$I_C=3\text{A}; I_B=0.8\text{A}$		5	8	V
$V_{BEsat}$	Base-emitter saturation voltage	$I_C=3\text{A}; I_B=0.8\text{A}$		0.9	1.5	V
$I_{CBO}$	Collector cut-off current	$V_{CB}=1500\text{V}; I_E=0$			1	mA
$I_{EBO}$	Emitter cut-off current	$V_{EB}=5\text{V}; I_C=0$	66		200	mA
$h_{FE}$	DC current gain	$I_C=0.5\text{A}; V_{CE}=5\text{V}$	8		25	
$V_F$	Diode forward voltage	$I_F=3.5\text{A}$		1.5	2.0	V
$C_{ob}$	Collector output capacitance	$I_E=0; V_{CB}=10\text{V}, f=1\text{MHz}$		55		pF
$f_T$	Transition frequency	$I_C=0.1\text{A}; V_{CE}=10\text{V}$		3		MHz

Switching times :


$t_s$	Storage time	$I_{CP}=3\text{A}; I_{B1}=0.8\text{A}$ $f_H=15.75\text{kHz}$		7.5	10	$\mu\text{s}$
$t_f$	Fall time			0.5	1.0	$\mu\text{s}$

Silicon NPN Power Transistors

2SD2599

PACKAGE OUTLINE

www.datasheet4u.com

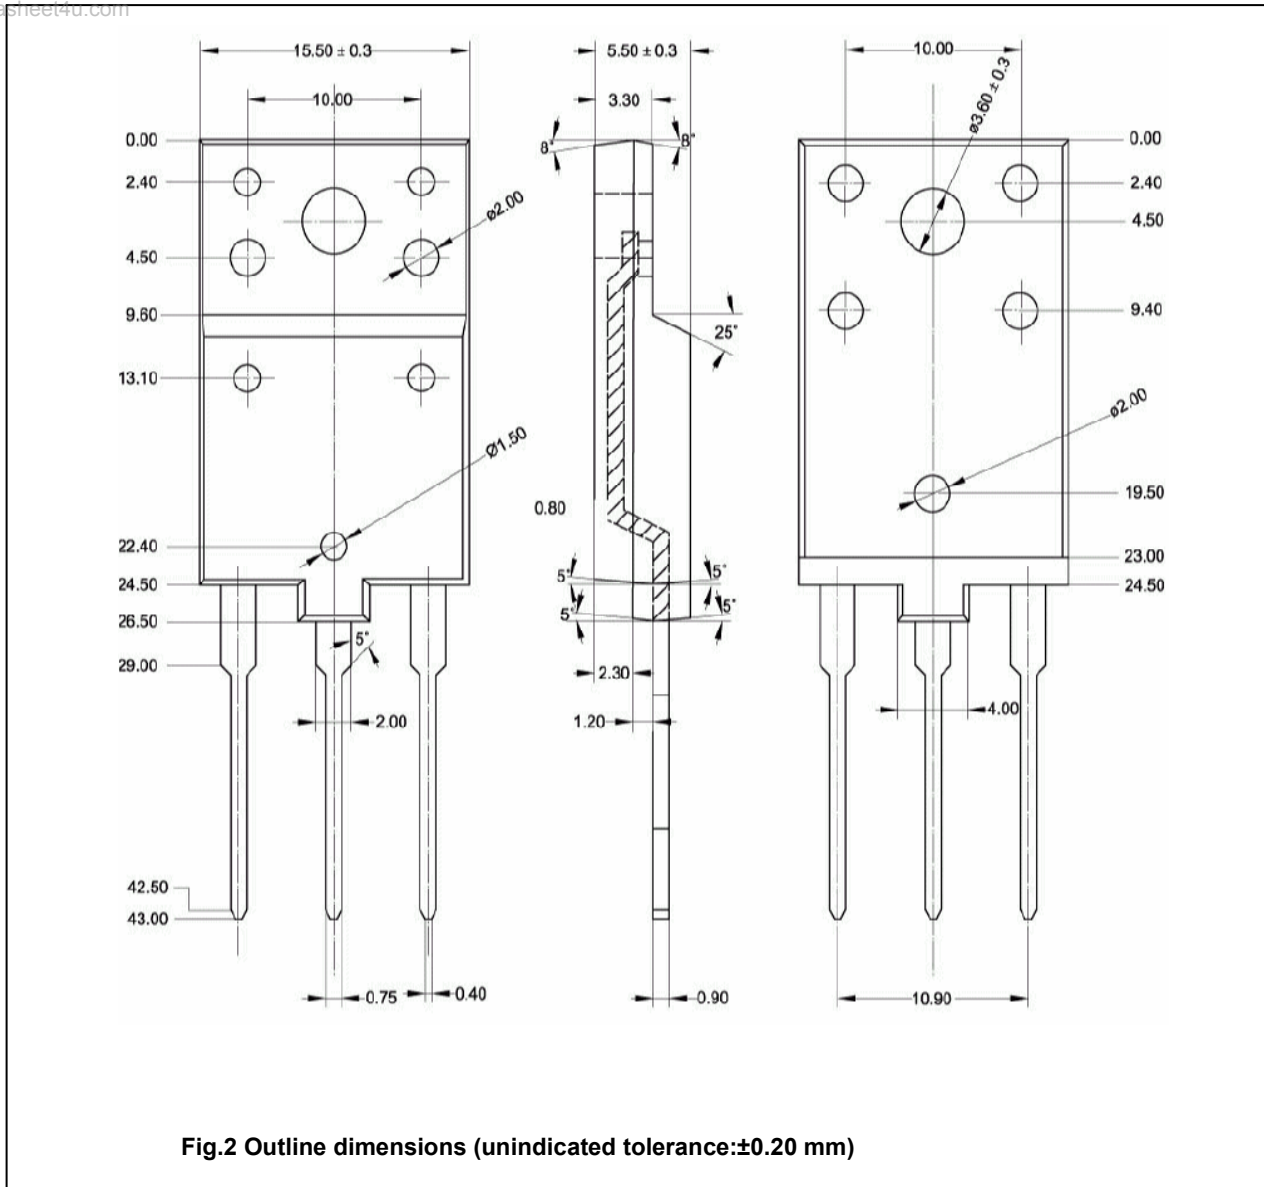

Silicon NPN Power Transistors

2SD2599

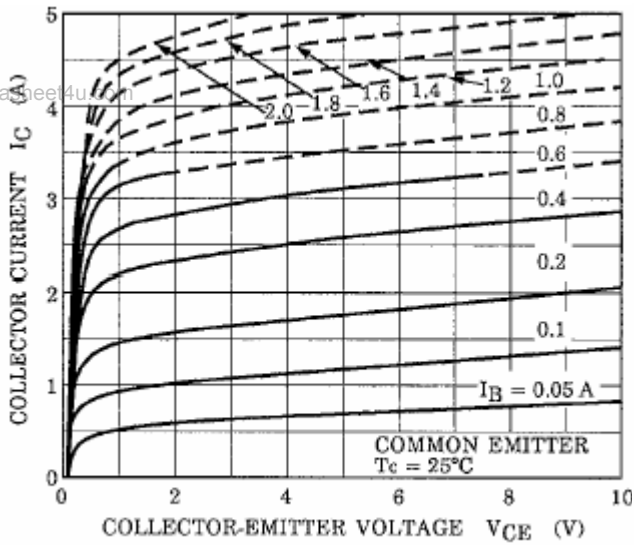


Fig.3 Static Characteristic

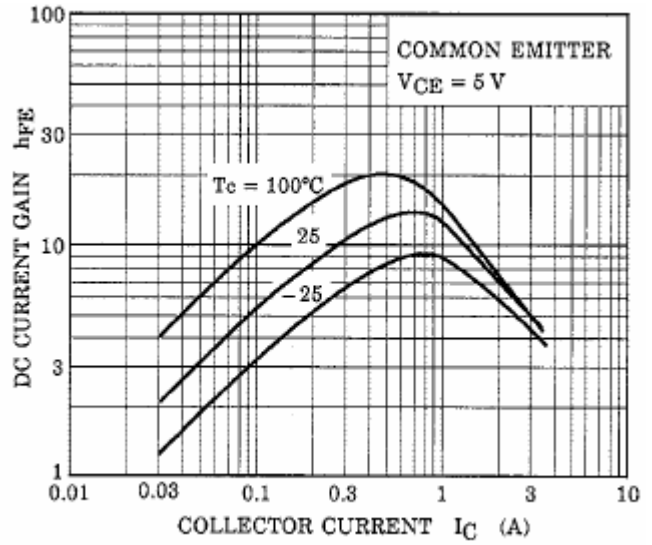


Fig.4 DC current Gain

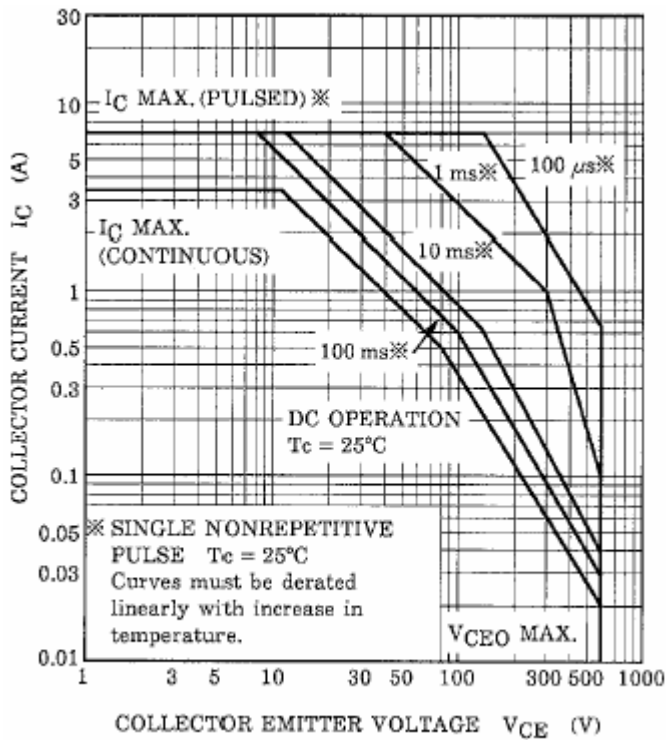


Fig.5 Safe Operating Area