

REVISIONS

LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED
P	Add case outline M. Technical changes and corrections to table I. Editorial changes throughout.	93-10-02	M. A. FRYE
R	Add class V level devices. Update boilerplate. - ro	99-06-08	R. MONNIN
T	Add case outline N. Make changes to 1.2.4, P _D , theta JC, I _{MAX} as specified in 1.3, table I, and figure 1. - ro	99-09-23	R. MONNIN

CURRENT CAGE CODE 67268

THE ORIGINAL FIRST PAGE OF THIS DRAWING HAS BEEN REPLACED.

REV	T	T	T	T	T	T														
SHEET	35	36	37	38	39	40														
REV	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
SHEET	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34
REV STATUS				REV	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
OF SHEETS				SHEET	1	2	3	4	5	6	7	8	9	10	11	12	13	14		
PMIC N/A					PREPARED BY	WILLIAM E. SHOUP				DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216										
STANDARD MICROCIRCUIT DRAWING					CHECKED BY	C. R. JACKSON														
THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE					APPROVED BY	N. A. HAUCK				MICROCIRCUIT, LINEAR, ADJUSTABLE VOLTAGE REGULATOR, MONOLITHIC										
					DRAWING APPROVAL DATE	77-09-15														
	AMSC N/A					REVISION LEVEL	T				SIZE	CAGE CODE	77034							
										A	67268									
										SHEET 1 OF 40										

DSCC FORM 2233
APR 97

5962-E477-99

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

1. SCOPE

1.1 Scope. This drawing documents two product assurance class levels consisting of high reliability (device classes Q and M) and space application (device class V). A choice of case outlines and lead finishes are available and are reflected in the Part or Identifying Number (PIN). When available, a choice of Radiation Hardness Assurance (RHA) levels are reflected in the PIN.

1.2 PIN. The PIN is as shown in the following examples.

For devices classes M and Q:

<u>77034</u> * * * *	<u>01</u> * * * *	<u>M</u> * * * *	<u>X</u> * * * *
Drawing number	Device type (see 1.2.2)	Case outline (see 1.2.4)	Lead finish (see 1.2.5)

For device class V:

<u>5962</u> * * *	- * * *	<u>77034</u> * * *	<u>01</u> * * *	<u>V</u> * * *	<u>X</u> * * *	<u>X</u> * * *	
Federal stock class designator	RHA designator (see 1.2.1)	Device type (see 1.2.2)	Device class designator (see 1.2.3)	Case outline (see 1.2.4)	Lead finish (see 1.2.5)		
		Drawing number					

1.2.1 RHA designator. Device classes Q and V RHA marked devices meet the MIL-PRF-38535 specified RHA levels and are marked with the appropriate RHA designator. Device class M RHA marked devices meet the MIL-PRF-38535, appendix A specified RHA levels and are marked with the appropriate RHA designator. A dash (-) indicates a non-RHA device.

1.2.2 Device type(s). The device type(s) identify the circuit function as follows:

<u>Device type</u>	<u>Generic number</u>	<u>Circuit function</u>
01	LM117	Positive adjustable voltage regulator
02	LM117HV	Positive adjustable voltage regulator, high voltage
03	LM137	Negative adjustable voltage regulator
04	LM137HV	Negative adjustable voltage regulator, high voltage
05	LT117A	Positive adjustable voltage regulator
06	LT137A	Negative adjustable voltage regulator
07	LT117AHV	Positive adjustable voltage regulator, high voltage
08	LT137AHV	Negative adjustable voltage regulator, high voltage

1.2.3 Device class designator. The device class designator is a single letter identifying the product assurance level as listed below. Since the device class designator has been added after the original issuance of this drawing, device classes M and Q designators will not be included in the PIN and will not be marked on the device.

<u>Device class</u>	<u>Device requirements documentation</u>
M	Vendor self-certification to the requirements for MIL-STD-883 compliant, non-JAN class level B microcircuits in accordance with MIL-PRF-38535, appendix A
Q or V	Certification and qualification to MIL-PRF-38535

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A	REVISION LEVEL T	77034 SHEET 2
---	-----------	---------------------	-------------------------

1.2.4 Case outline(s). The case outline(s) are as designated in MIL-STD-1835 and as follows:

<u>Outline letter</u>	<u>Descriptive designator</u>	<u>Terminals</u>	<u>Package style</u>
M	See figure 1	3	Power surface mount
N	See figure 1	3	Surface mount
T	See figure 1	3	TO-257 flange mount, glass sealed
U	See figure 1	3	TO-257 flange mount with isolated tab, glass sealed
X	See figure 1	3	TO-39 can
Y	MFBM1-P2	2	Flange mount
Z	MBFM4-P2	2	Flange mount
2	CQCC1-N20	20	Square leadless chip carrier

1.2.5 Lead finish. The lead finish is as specified in MIL-PRF-38535 for device classes Q and V or MIL-PRF-38535, appendix A for device class M.

1.3 Absolute maximum ratings. ^{1/}

Power dissipation (P_D):

Case X 2 W
 Cases M, N, T, U, Y, and Z (internally limited)..... 20 W
 Case 2:

At $T_A = +25^\circ\text{C}$ 1.1 W
 At $T_C = +25^\circ\text{C}$ 6.2 W

Input-output voltage differential:

Device types 01, 03, 05, 06 40 V dc
 Device types 02, 07 60 V dc
 Device types 04, 08 50 V dc

Operating junction temperature range -55°C to $+150^\circ\text{C}$

Storage temperature -65°C to $+150^\circ\text{C}$

Lead temperature (soldering, 10 seconds) 300°C

Thermal resistance, junction to case (θ_{JC}):

Cases M, N, and T 3.5°C/W
 Case U 4.2°C/W
 Case X 15°C/W
 Case Y 3°C/W
 Case Z 5°C/W
 Case 2 See MIL-STD-1835

Maximum output current (I_{MAX}):

Cases X and 2 0.5 A
 Cases M, N, T, U, Y, and Z 1.5 A

1.4 Recommended operating conditions.

Output voltage range:

Device types 01, 05 1.2 to 37 V dc
 Device types 02, 07 1.2 to 57 V dc
 Device types 03, 06 -1.2 to -37 V dc
 Device types 04, 08 -1.2 to -47 V dc

Ambient operating temperature range (T_A) -55°C to $+125^\circ\text{C}$

Input voltage range:

Device types 01, 05 4.25 V dc to 41.25 V dc
 Device types 03, 06 -4.25 V dc to -41.25 V dc
 Device types 02, 07 4.25 V dc to 61.25 V dc
 Device types 04, 08 -4.25 V dc to -51.25 V dc

^{1/} Stresses above the absolute maximum rating may cause permanent damage to the device. Extended operation at the maximum levels may degrade performance and affect reliability.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 3

2. APPLICABLE DOCUMENTS

2.1 Government specification, standards, and handbooks. The following specification, standards, and handbooks form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-38535 - Integrated Circuits, Manufacturing, General Specification for.

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-883 - Test Method Standard Microcircuits.
 MIL-STD-973 - Configuration Management.
 MIL-STD-1835 - Interface Standard For Microcircuit Case Outlines.

HANDBOOKS

DEPARTMENT OF DEFENSE

MIL-HDBK-103 - List of Standard Microcircuit Drawings (SMD's).
 MIL-HDBK-780 - Standard Microcircuit Drawings.

(Unless otherwise indicated, copies of the specification, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Item requirements. The individual item requirements for device classes Q and V shall be in accordance with MIL-PRF-38535 and as specified herein or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein. The individual item requirements for device class M shall be in accordance with MIL-PRF-38535, appendix A for non-JAN class level B devices and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535 and herein for device classes Q and V or MIL-PRF-38535, appendix A and herein for device class M.

3.2.1 Case outline(s). The case outline(s) shall be in accordance with 1.2.4 herein and figure 1.

3.2.2 Terminal connections. The terminal connections shall be as specified on figure 1.

3.3 Electrical performance characteristics and postirradiation parameter limits. Unless otherwise specified herein, the electrical performance characteristics and postirradiation parameter limits are as specified in table I and shall apply over the full ambient operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table IIA. The electrical tests for each subgroup are defined in table I.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 4

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Cases X and 2							
Reference voltage	V _{REF}	V _{DIFF} = 3.0 V	1	01	1.20	1.30	V
		V _{DIFF} = 3.3 V	2,3		1.20	1.30	
		V _{DIFF} = 40 V	1,2,3		1.20	1.30	
Line regulation	R _{LINE}	3.0 ≤ V _{DIFF} ≤ 40 V, V _{OUT} = V _{REF}	1	01		±9	mV
		3.3 ≤ V _{DIFF} ≤ 40 V, V _{OUT} = V _{REF}	2,3			±23	
Load regulation <u>1</u> /	R _{LOAD}	V _{DIFF} = 3 V, 10 mA ≤ I _L ≤ 500 mA	1	01		±15	mV
		V _{DIFF} = 3.3 V, 10 mA ≤ I _L ≤ 500 mA	2,3			±15	
		V _{DIFF} = 40V, 10 mA ≤ I _L ≤ 150 mA	1			±15	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 100 mA	2,3			±15	
Thermal regulation	V _{RTH}	V _{IN} = +14.6 V, I _L = 300 mA, t = 20 ms, P _D = 4 W, T _A = +25°C	1	01		±3.1	mV
Ripple rejection	R _N	f = 120 Hz, C _{ADJ} = 10 μF, V _{OUT} = V _{REF} <u>2</u> /	4,5,6	01	66		dB
Adjustment pin current	I _{ADJ}	V _{DIFF} = 3.0 V	1	01		100	μA
		V _{DIFF} = 3.3 V	2,3			100	
		V _{DIFF} = 40 V	1,2,3			100	
Adjustment pin current change	ΔI _{ADJ}	V _{DIFF} = 3 V, 10 mA ≤ I _L ≤ 500 mA	1	01		±5	μA
		V _{DIFF} = 3.3 V, 10 mA ≤ I _L ≤ 500 mA	2,3			±5	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 150 mA	1			±5	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 100 mA	2,3			±5	

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 5

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Cases X, 2 - Continued.							
Adjustment pin current change	ΔI _{ADJ}	3 V ≤ V _{DIFF} ≤ 40 V	1	01		±5	μA
		3.3 V ≤ V _{DIFF} ≤ 40 V	2,3			±5	
Minimum load current	I _{LMIN}	V _{DIFF} = 3.0 V, V _{OUT} = 1.4 V (forced)	1	01		5	mA
		V _{DIFF} = 3.3 V, V _{OUT} = 1.4 V (forced)	2,3			5	
		V _{DIFF} = 40 V, V _{OUT} = 1.4 V (forced)	1,2,3			5	
Current limit <u>2</u> /	I _{CL}	V _{DIFF} = 15 V	1,2,3	01	0.5	1.65	A
		V _{DIFF} = 40 V	1		0.15	0.65	
Cases M, N, T, U, Y, Z							
Reference voltage	V _{REF}	V _{DIFF} = 3.0 V	1	01	1.20	1.30	V
		V _{DIFF} = 3.3 V	2,3		1.20	1.30	
		V _{DIFF} = 40 V	1,2,3		1.20	1.30	
Line regulation	R _{LINE}	V _{OUT} = V _{REF} , 3.0 V ≤ V _{DIFF} ≤ 40 V	1	01		±9	mV
		V _{OUT} = V _{REF} , 3.3 V ≤ V _{DIFF} ≤ 40 V	2,3			±23	
Load regulation <u>1</u> /	R _{LOAD}	V _{DIFF} = 3 V, 10 mA ≤ I _L ≤ 1.5 A	1	01		±15	mV
		V _{DIFF} = 3.3 V, 10 mA ≤ I _L ≤ 1.5 A	2,3			±15	
		V _{DIFF} = 40V, 10 mA ≤ I _L ≤ 300 mA	1			±15	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 195 mA	2,3			±15	
Thermal regulation	V _{RTH}	V _{IN} = 14.6 V, I _L = 1.5 A, P _D = 20 watts, t = 20 ms, T _A = +25°C	1	01		±16	mV

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 6

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Cases M, N, T, U, Y, Z - Continued.							
Ripple rejection	R _N	f = 120 Hz, C _{ADJ} = 10 μF, V _{OUT} = V _{REF} 2/	4,5,6	01	66		dB
Adjustment pin current	I _{ADJ}	V _{DIFF} = 3.0 V	1	01		100	μA
		V _{DIFF} = 3.3 V	2,3			100	
		V _{DIFF} = 40 V	1,2,3			100	
Adjustment pin current change	ΔI _{ADJ}	V _{DIFF} = 3 V, 10 mA ≤ I _L ≤ 1.5 A	1	01		±5	μA
		V _{DIFF} = 3.3 V, 10 mA ≤ I _L ≤ 1.5 A	2,3			±5	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 300 mA	1			±5	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 195 mA	2,3			±5	
		3 V ≤ V _{DIFF} ≤ 40 V	1			±5	
		3.3 V ≤ V _{DIFF} ≤ 40 V	2,3			±5	
Minimum load current	I _{LMIN}	V _{DIFF} = 3.0 V, V _{OUT} = 1.4 V (forced)	1	01		5	mA
		V _{DIFF} = 3.3 V, V _{OUT} = 1.4 V (forced)	2,3			5	
		V _{DIFF} = 40 V, V _{OUT} = 1.4 V (forced)	1,2,3			5	
Current limit 2/	I _{CL}	V _{DIFF} = 15 V	1,2,3	01	1.50	3.50	A
		V _{DIFF} = 40 V	1		0.18	1.5	

Case X

Reference voltage	V _{REF}	V _{DIFF} = 3.0 V	1	02	1.20	1.30	V
		V _{DIFF} = 3.3 V	2,3		1.20	1.30	
		V _{DIFF} = 40 V	1,2,3		1.20	1.30	
		V _{DIFF} = 60 V	1,2,3		1.20	1.30	

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 7

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Case X - Continued.							
Line regulation <u>3/</u>	R _{LINE}	V _{OUT} = V _{REF} , 3.0 V ≤ V _{DIFF} ≤ 40 V	1	02		±9	mV
		V _{OUT} = V _{REF} , 3.3 V ≤ V _{DIFF} ≤ 40 V	2,3			±23	
		V _{OUT} = V _{REF} , 40 V ≤ V _{DIFF} ≤ 60 V	1			±5	
			2,3			±10	
Load regulation <u>1/</u>	R _{LOAD}	V _{DIFF} = 3 V, 10 mA ≤ I _L ≤ 500 mA	1	02		±15	mV
		V _{DIFF} = 3.3 V, 10 mA ≤ I _L ≤ 500 mA	2,3			±15	
		V _{DIFF} = 40V, 10 mA ≤ I _L ≤ 150 mA	1			±15	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 100 mA	2,3			±15	
		V _{DIFF} = 60 V, 10 mA ≤ I _L ≤ 20 mA	1,2,3			±15	
Thermal regulation	V _{RTH}	V _{IN} = 14.6 V, I _L = 300 mA, t = 20 ms, P _D = 4 W, T _A = +25°C	1	02		±3.1	mV
Ripple rejection <u>2/</u>	R _N	f = 120 Hz, C _{ADJ} = 10 μF, V _{OUT} = V _{REF} , I _{OUT} = 100 mA	4,5,6	02	66		dB
Adjustment pin current	I _{ADJ}	V _{DIFF} = 3.0 V	1	02		100	μA
		V _{DIFF} = 3.3 V	2,3			100	
		V _{DIFF} = 40 V	1,2,3			100	
		V _{DIFF} = 60 V	1,2,3			100	

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 8

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Case X - Continued.							
Adjustment pin current change	ΔI _{ADJ}	V _{DIFF} = 3 V, 10 mA ≤ I _L ≤ 500 mA	1	02		±5	μA
		V _{DIFF} = 3.3 V, 10 mA ≤ I _L ≤ 500 mA	2,3			±5	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 150 mA	1			±5	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 100 mA	2,3			±5	
		3 V ≤ V _{DIFF} ≤ 40 V	1			±5	
		3.3 V ≤ V _{DIFF} ≤ 40 V	2,3			±5	
		3.3 V ≤ V _{DIFF} ≤ 60 V	1,2,3			±5	
Minimum load current	I _{LMIN}	V _{DIFF} = 3.0 V, V _{OUT} = 1.4 V (forced)	1	02		5	mA
		V _{DIFF} = 3.3 V, V _{OUT} = 1.4 V (forced)	2,3			5	
		V _{DIFF} = 40 V, V _{OUT} = 1.4 V (forced)	1,2,3			5	
		V _{DIFF} = 60 V, V _{OUT} = 1.4 V (forced)	1,2,3			7	
Current limit <u>2</u> /	I _{CL}	V _{DIFF} = 5 V	1,2,3	02	0.5	1.65	A
		V _{DIFF} = 40 V	1		0.15	0.65	
		V _{DIFF} = 60 V	1		0.02	0.28	
Cases M, N, T, U, Y, Z							
Reference voltage	V _{REF}	V _{DIFF} = 3.0 V	1	02	1.20	1.30	V
		V _{DIFF} = 3.3 V	2,3		1.20	1.30	
		V _{DIFF} = 40 V	1,2,3		1.20	1.30	
		V _{DIFF} = 60 V	1,2,3		1.20	1.30	

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 9

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Cases M, N, T, U, Y, Z - Continued.							
Line regulation <u>3/</u>	R _{LINE}	V _{OUT} = V _{REF} , 3.0 V ≤ V _{DIFF} ≤ 40 V	1	02		±9	mV
		V _{OUT} = V _{REF} , 3.3 V ≤ V _{DIFF} ≤ 40 V	2,3			±23	
		V _{OUT} = V _{REF} , 40 V ≤ V _{DIFF} ≤ 60 V	1			±5	
			2,3			±10	
Load regulation <u>1/</u>	R _{LOAD}	V _{DIFF} = 3 V, 10 mA ≤ I _L ≤ 1.5 A	1	02		±15	mV
		V _{DIFF} = 3.3 V, 10 mA ≤ I _L ≤ 1.5 A	2,3			±15	
		V _{DIFF} = 40V, 10 mA ≤ I _L ≤ 300 mA	1			±15	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 195 mA	2,3			±15	
		V _{DIFF} = 60 V, 10 mA ≤ I _L ≤ 30 mA	1,2,3			±15	
Thermal regulation	V _{RTH}	V _{IN} = 14.6 V, I _L = 1.5 A, P _D = 20 watts, t = 20 ms, T _A = +25°C	1	02		±16	mV
Ripple rejection <u>2/</u>	R _N	f = 120 Hz, C _{ADJ} = 10 μF, V _{OUT} = V _{REF} , I _{OUT} = 100 mA	4,5,6	02	66		dB
Adjustment pin current	I _{ADJ}	V _{DIFF} = 3.0 V	1	02		100	μA
		V _{DIFF} = 3.3 V	2,3			100	
		V _{DIFF} = 40 V	1,2,3			100	
		V _{DIFF} = 60 V	1,2,3			100	

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 10

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Cases M, N, T, U, Y, Z - Continued.							
Adjustment pin current change	ΔI _{ADJ}	V _{DIFF} = 3 V, 10 mA ≤ I _L ≤ 1.5 A	1	02		±5	μA
		V _{DIFF} = 3.3 V, 10 mA ≤ I _L ≤ 1.5 A	2,3			±5	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 300 mA	1			±5	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 195 mA	2,3			±5	
		3 V ≤ V _{DIFF} ≤ 40 V	1			±5	
		3.3 V ≤ V _{DIFF} ≤ 40 V	2,3			±5	
		3.3 V ≤ V _{DIFF} ≤ 60 V	1,2,3			±5	
Minimum load current	I _{LMIN}	V _{DIFF} = 3.0 V, V _{OUT} = 1.4 V (forced)	1	02		5	mA
		V _{DIFF} = 3.3 V, V _{OUT} = 1.4 V (forced)	2,3			5	
		V _{DIFF} = 40 V, V _{OUT} = 1.4 V (forced)	1,2,3			5	
		V _{DIFF} = 60 V, V _{OUT} = 1.4 V (forced)	1,2,3			7	
Current limit <u>2</u> /	I _{CL}	V _{DIFF} = 5 V	1,2,3	02	1.5	3.5	A
		V _{DIFF} = 40 V	1		0.3	1.5	
		V _{DIFF} = 60 V	1		0.05	0.50	

Cases X, 2

Reference voltage	V _{REF}	V _{DIFF} = 3.0 V	1	03	-1.275	-1.225	V
			2,3		-1.30	-1.20	
		V _{DIFF} = 40 V	1		-1.275	-1.225	
			2,3		-1.30	-1.20	

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 11

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Cases X, 2 - Continued.							
Line regulation	R _{LINE}	3.0 V ≤ V _{DIFF} ≤ 40 V	1	03		±9	mV
			2,3			±23	
Load regulation <u>1/</u>	R _{LOAD}	V _{DIFF} = 5 V, 8 mA ≤ I _L ≤ 200 mA	1,2,3	03		±25	mV
		V _{DIFF} = 15 V, 8 mA ≤ I _L ≤ 200 mA	1,2,3			±25	
		V _{DIFF} = 40V, 8 mA ≤ I _L ≤ 150 mA	1			±25	
		V _{DIFF} = 40 V, 8 mA ≤ I _L ≤ 50 mA	2,3			±25	
Thermal regulation	V _{RTH}	V _{IN} = -16.25 V, I _L = 330 mA, T _A = +25°C P _D = 5 watts, t = 10 ms,	1	03		±2	mV
Ripple rejection <u>2/</u>	R _N	f = 120 Hz, C _{ADJ} = 10 μF, V _{OUT} = V _{REF}	4,5,6	03	66		dB
Adjustment pin current	I _{ADJ}	V _{DIFF} = 3.0 V	1,2,3	03		100	μA
		V _{DIFF} = 40 V	1,2,3			100	
Adjustment pin current change	ΔI _{ADJ} (line)	3.0 V ≤ V _{DIFF} ≤ 40 V	1,2,3	03		±5	μA
	ΔI _{ADJ} (load)	V _{DIFF} = 5.0 V, 8 mA ≤ I _L ≤ 500 mA	1,2,3			±5	
Minimum load current	I _{LMIN}	V _{DIFF} = 3.0 V, V _{OUT} = -1.4 V (forced)	1,2,3	03		3	mA
		V _{DIFF} = 10 V, V _{OUT} = -1.4 V (forced)	1,2,3			3	
		V _{DIFF} = 40 V, V _{OUT} = -1.4 V (forced)	1,2,3			5	
Current limit <u>2/</u>	I _{CL}	V _{DIFF} = 5 V, T _A = +25°C	1	03	0.5	1.8	A
		V _{DIFF} = 40 V, T _A = +25°C	1		0.15	0.65	

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 12

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Cases M, N, T, U, Y, Z							
Reference voltage	V _{REF}	V _{DIFF} = 3.0 V	1	03	-1.275	-1.225	V
			2,3		-1.30	-1.20	
		V _{DIFF} = 40 V	1		-1.275	-1.225	
			2,3		-1.30	-1.20	
Line regulation	R _{LINE}	3.0 V ≤ V _{DIFF} ≤ 40 V	1	03		±9	mV
			2,3			±23	
Load regulation <u>1</u> /	R _{LOAD}	V _{DIFF} = 5 V, 8 mA ≤ I _L ≤ 1.5 A	1,2,3	03		±25	mV
		V _{DIFF} = 12 V, 8 mA ≤ I _L ≤ 1.5 A	1			±25	
		V _{DIFF} = 40V, 8 mA ≤ I _L ≤ 200 mA	1			±25	
		V _{DIFF} = 40 V, 8 mA ≤ I _L ≤ 100 mA	2,3			±25	
Thermal regulation	V _{RTH}	V _{IN} = -14.6 V, I _L = 1.5 A, P _D = 20 watts, t = 10 ms, T _A = +25°C	1	03		±5	mV
Ripple rejection <u>2</u> /	R _N	f = 120 Hz, C _{ADJ} = 10 μF, V _{OUT} = V _{REF}	4,5,6	03	66		dB
Adjustment pin current	I _{ADJ}	V _{DIFF} = 3.0 V	1,2,3	03		100	μA
		V _{DIFF} = 40 V	1,2,3			100	
Adjustment pin current change	ΔI _{ADJ} (line)	3.0 V ≤ V _{DIFF} ≤ 40 V	1,2,3	03		±5	μA
	ΔI _{ADJ} (load)	V _{DIFF} = 5.0 V, 8 mA ≤ I _L ≤ 1.5 A	1,2,3			±5	

See footnotes at end of table.

<p align="center">STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000</p>	SIZE A		77034
		REVISION LEVEL T	SHEET 13

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Cases M, N, T, U, Y, Z - Continued.							
Minimum load current	I _{LMIN}	V _{DIFF} = 3.0 V, V _{OUT} = -1.4 V (forced)	1,2,3	03		3	mA
		V _{DIFF} = 10 V, V _{OUT} = -1.4 V (forced)	1,2,3			3	
		V _{DIFF} = 40 V, V _{OUT} = -1.4 V (forced)	1,2,3			5	
Current limit <u>2</u> /	I _{CL}	V _{DIFF} = 5 V	1,2,3	03	1.5	3.5	A
		V _{DIFF} = 40 V	1		0.24	1.2	
Case X							
Reference voltage	V _{REF}	V _{DIFF} = 3.0 V	1	04	-1.275	-1.225	V
			2,3		-1.300	-1.200	
		V _{DIFF} = 40 V	1		-1.275	-1.225	
			2,3		-1.300	-1.200	
		V _{DIFF} = 50 V	1		-1.275	-1.225	
			2,3		-1.300	-1.200	
Line regulation	R _{LINE}	3.0 V ≤ V _{DIFF} ≤ 50 V	1	04		±10	mV
			2,3			±25	
Load regulation <u>1</u> /	R _{LOAD}	V _{DIFF} = 50 V, 8 mA ≤ I _L ≤ 100 mA	1	04		±25	mV
			2,3			±31	
		V _{DIFF} = 5.0 V, 8 mA ≤ I _L ≤ 500 mA	1			±50	
Thermal regulation	V _{RTH}	V _{IN} = -16.25 V, I _L = 330 mA, P _D = 5 watts, t = 10 ms, T _A = +25°C	1	04		±2	mV
			2,3				
Ripple rejection <u>2</u> /	R _N	f = 120 Hz, C _{ADJ} = 10 μF, V _{OUT} = V _{REF}	4,5,6	04	66		dB

See footnotes at end of table.

<p align="center">STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000</p>	SIZE A		77034
		REVISION LEVEL T	SHEET 14

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Case X - Continued.							
Adjustment pin current	I _{ADJ-1}	V _{DIFF} = 3.0 V	1,2,3	04		100	μA
	I _{ADJ-2}	V _{DIFF} = 40 V	1,2,3			100	
	I _{ADJ-3}	V _{DIFF} = 50 V	1,2,3			100	
Adjustment pin current change	ΔI _{ADJ}	V _{DIFF} = 5.0 V, 8 mA ≤ I _{OUT} ≤ 200 mA	1,2,3	04		±5	μA
		I _L = 8 mA, 3.0 V ≤ V _{DIFF} ≤ 50 V	1,2,3			±6	
Minimum load current	I _L MIN	V _{DIFF} = 3.0 V, V _{OUT} = -1.4 V (forced)	1,2,3	04		3	mA
		V _{DIFF} = 10 V, V _{OUT} = -1.4 V (forced)	1,2,3			3	
		V _{DIFF} = 40 V, V _{OUT} = -1.4 V (forced)	1,2,3			5	
		V _{DIFF} = 50 V, V _{OUT} = -1.4 V (forced)	1,2,3			5	
Current limit <u>2/</u>	I _{CL}	V _{DIFF} = 5 V	1,2,3	04	0.5	1.8	A
		V _{DIFF} = 50 V	1		0.1	0.65	

Cases M, N, T, U, Y, Z

Reference voltage	V _{REF}	V _{DIFF} = 3.0 V	1	04	-1.275	-1.225	V
			2,3		-1.300	-1.200	
		V _{DIFF} = 50 V	1		-1.275	-1.225	
			2,3		-1.300	-1.200	
Line regulation	R _{LINE}	3.0 V ≤ V _{DIFF} ≤ 50 V	1	04		±10	mV
			2,3			±25	
Load regulation <u>1/</u>	R _{LOAD}	V _{DIFF} = 50 V, 8 mA ≤ I _L ≤ 110 mA	1	04		±25	mV
			2,3			±25	
		V _{DIFF} = 5.0 V, 8 mA ≤ I _L ≤ 1.5 A	1			±25	

See footnotes at end of table.

<p align="center">STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000</p>	SIZE A		77034
		REVISION LEVEL T	SHEET 15

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Case M, N, T, U, Y, Z - Continued.							
Thermal regulation	V _{RTH}	V _{IN} = -14.6 V, I _L = 1.5 A, P _D = 20 watts, t = 10 ms, T _A = +25°C	1	04		±5	mV
Ripple rejection <u>2</u> /	R _N	f = 120 Hz, C _{ADJ} = 10 μF, V _{OUT} = V _{REF}	4,5,6	04	66		dB
Adjustment pin current	I _{ADJ-1}	V _{DIFF} = 3.0 V	1,2,3	04		100	μA
	I _{ADJ-2}	V _{DIFF} = 40 V	1,2,3			100	
	I _{ADJ-3}	V _{DIFF} = 50 V	1,2,3			100	
Adjustment pin current change	ΔI _{ADJ}	V _{DIFF} = 5.0 V, 8 mA ≤ I _{OUT} ≤ 1.5 A	1,2,3	04		±5	μA
		I _L = 8 mA, 3.0 V ≤ V _{DIFF} ≤ 50 V	1,2,3			±6	
Minimum load current	I _{LMIN}	V _{DIFF} = 3.0 V, V _{OUT} = -1.4 V (forced)	1,2,3	04		3	mA
		V _{DIFF} = 10 V, V _{OUT} = -1.4 V (forced)	1,2,3			3	
		V _{DIFF} = 40 V, V _{OUT} = -1.4 V (forced)	1,2,3			5	
		V _{DIFF} = 50 V, V _{OUT} = -1.4 V (forced)	1,2,3			5	
Current limit <u>2</u> /	I _{CL}	V _{DIFF} = 5 V	1,2,3	04	1.5	3.5	A
		V _{DIFF} = 50 V	1		0.2	1.0	

Cases X, 2

Reference voltage	V _{REF}	V _{DIFF} = 3.0 V	1	05	1.238	1.262	V
		V _{DIFF} = 3.3 V	2,3		1.225	1.270	
		V _{DIFF} = 40 V	1,2,3		1.225	1.270	

See footnotes at the end table.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 16

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Cases X, 2 - Continued.							
Line regulation	R _{LINE}	V _{OUT} = V _{REF} , 3.0 V ≤ V _{DIFF} ≤ 40 V	1	05		±4.5	mV
		V _{OUT} = V _{REF} , 3.3 V ≤ V _{DIFF} ≤ 40 V	2,3			±9	
Load regulation <u>1/</u>	R _{LOAD}	V _{DIFF} = 3 V, 10 mA ≤ I _L ≤ 500 mA	1	05		±15	mV
		V _{DIFF} = 3.3 V, 10 mA ≤ I _L ≤ 500 mA	2,3			±15	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 150 mA	1			±15	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 100 mA	2,3			±15	
Thermal regulation	V _{RTH}	V _{IN} = +14.6 V, I _L = 300 mA, P _D = 4 watts, t = 20 ms, T _A = +25°C	1	05		±2	mV
Ripple rejection <u>2/</u>	R _N	f = 120 Hz, C _{ADJ} = 10 μF, V _{OUT} = V _{REF}	4,5,6	05	66		dB
Adjustment pin current	I _{ADJ}	V _{DIFF} = 3.0 V	1	05		100	μA
		V _{DIFF} = 3.3 V	2,3			100	
		V _{DIFF} = 40 V	1,2,3			100	
Adjustment pin current change	ΔI _{ADJ}	V _{DIFF} = 3 V, 10 mA ≤ I _L ≤ 500 mA	1	05		±5	μA
		V _{DIFF} = 3.3 V, 10 mA ≤ I _L ≤ 500 mA	2,3			±5	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 150 mA	1			±5	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 100 mA	2,3			±5	
		3.0 V ≤ V _{DIFF} ≤ 40 V	1			±5	
		3.3 V ≤ V _{DIFF} ≤ 40 V	2,3			±5	

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 17

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Cases X, 2 - Continued.							
Minimum load current	I _{LMIN}	V _{DIFF} = 3.0 V, V _{OUT} = 1.4 V (forced)	1	05		5	mA
		V _{DIFF} = 3.3 V, V _{OUT} = 1.4 V (forced)	2,3			5	
		V _{DIFF} = 40 V, V _{OUT} = 1.4 V (forced)	1,2,3			5	
Current limit <u>2</u> /	I _{CL}	V _{DIFF} = 15 V	1,2,3	05	0.5	1.65	A
		V _{DIFF} = 40 V	1		0.15	0.65	
Cases M, N, T, U, Y, Z							
Reference voltage	V _{REF}	V _{DIFF} = 3.0 V	1	05	1.238	1.262	V
		V _{DIFF} = 3.3 V	2,3		1.225	1.270	
		V _{DIFF} = 40 V	1,2,3		1.225	1.270	
Line regulation	R _{LINE}	V _{OUT} = V _{REF} , 3.0 V ≤ V _{DIFF} ≤ 40 V	1	05		±4.5	mV
		V _{OUT} = V _{REF} , 3.3 V ≤ V _{DIFF} ≤ 40 V	2,3			±9	
Load regulation <u>1</u> /	R _{LOAD}	V _{DIFF} = 3 V, 10 mA ≤ I _L ≤ 1.5 A	1	05		±15	mV
		V _{DIFF} = 3.3 V, 10 mA ≤ I _L ≤ 1.5 A	2,3			±15	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 300 mA	1			±15	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 195 mA	2,3			±15	
Thermal regulation	V _{RTH}	V _{IN} = +14.6 V, I _L = 1.5 A, P _D = 20 watts, t = 20 ms, T _A = +25°C	1	05		±5	mV

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 18

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Cases M, N, T, U, Y, Z - Continued.							
Ripple rejection <u>2/</u>	R _N	f = 120 Hz, C _{ADJ} = 10 μF, V _{OUT} = V _{REF}	4,5,6	05	66		dB
Adjustment pin current	I _{ADJ}	V _{DIFF} = 3.0 V	1	05		100	μA
		V _{DIFF} = 3.3 V	2,3			100	
		V _{DIFF} = 40 V	1,2,3			100	
Adjustment pin current change	ΔI _{ADJ}	V _{DIFF} = 3 V, 10 mA ≤ I _L ≤ 1.5 A	1	05		±5	μA
		V _{DIFF} = 3.3 V, 10 mA ≤ I _L ≤ 1.5 A	2,3			±5	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 300 mA	1			±5	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 195 mA	2,3			±5	
		3.0 V ≤ V _{DIFF} ≤ 40 V	1			±5	
		3.3 V ≤ V _{DIFF} ≤ 40 V	2,3			±5	
Minimum load current	I _{LMIN}	V _{DIFF} = 3.0 V, V _{OUT} = 1.4 V (forced)	1	05		5	mA
		V _{DIFF} = 3.3 V, V _{OUT} = 1.4 V (forced)	2,3			5	
		V _{DIFF} = 40 V, V _{OUT} = 1.4 V (forced)	1,2,3			5	
Current limit <u>2/</u>	I _{CL}	V _{DIFF} = 15 V	1,2,3	05	1.50	3.50	A
		V _{DIFF} = 40 V	1		0.18	1.5	
Cases X, 2							
Reference voltage	V _{REF}	V _{DIFF} = 3.0 V	1	06	-1.262	-1.238	V
			2,3		-1.280	-1.220	
		V _{DIFF} = 40 V	1,2,3		-1.280	-1.220	

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 19

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Cases X, 2 - Continued.							
Line regulation	R _{LINE}	3.0 V ≤ V _{DIFF} ≤ 40 V	1	06		±4.5	mV
			2,3			±13.8	
Load regulation <u>1/</u>	R _{LOAD}	V _{DIFF} = 5 V, 8 mA ≤ I _L ≤ 200 mA	1,2,3	06		±25	mV
		V _{DIFF} = 15 V, 8 mA ≤ I _L ≤ 200 mA	1,2,3			±25	
		V _{DIFF} = 40 V, 8 mA ≤ I _L ≤ 150 mA	1			±25	
		V _{DIFF} = 40 V, 8 mA ≤ I _L ≤ 50 mA	2,3			±50	
Thermal regulation	V _{RTH}	V _{IN} = -16.25 V, I _L = 330 mA, T _A = +25°C P _D = 5 watts, t = 10 ms	1	06		±2	mV
Ripple rejection <u>2/</u>	R _N	f = 120 Hz, C _{ADJ} = 10 μF, V _{OUT} = V _{REF}	4,5,6	06	66		dB
Adjustment pin current	I _{ADJ}	V _{DIFF} = 3.0 V V _{DIFF} = 40 V	1,2,3	06		100	μA
			1,2,3			100	
Adjustment pin current change	ΔI _{ADJ} (line)	3.0 V ≤ V _{DIFF} ≤ 40 V	1,2,3	06		±5	μA
	ΔI _{ADJ} (load)	V _{DIFF} = 5.0 V, 8 mA ≤ I _L ≤ 500 mA	1,2,3			±5	
Minimum load current	I _{LMIN}	V _{DIFF} = 3.0 V, V _{OUT} = -1.4 V (forced)	1,2,3	06		3	mA
		V _{DIFF} = 10 V, V _{OUT} = -1.4 V (forced)	1,2,3			3	
		V _{DIFF} = 40 V, V _{OUT} = -1.4 V (forced)	1,2,3			5	
Current limit <u>2/</u>	I _{CL}	V _{DIFF} = 5 V, T _A = +25°C	1	06	0.5	1.8	A
		V _{DIFF} = 40 V, T _A = +25°C	1		0.15	0.65	

See footnotes at end of table.

<p align="center">STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000</p>	<p align="center">SIZE A</p>		<p align="center">77034</p>
		<p align="center">REVISION LEVEL T</p>	<p align="center">SHEET 20</p>

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Cases M, N, T, U, Y, Z							
Reference voltage	V _{REF}	V _{DIFF} = 3.0 V	1	06	-1.262	-1.238	V
			2,3		-1.280	-1.220	
		V _{DIFF} = 40 V	1,2,3		-1.280	-1.220	
Line regulation	R _{LINE}	3.0 V ≤ V _{DIFF} ≤ 40 V	1	06		±4.5	mV
			2,3			±13.8	
Load regulation <u>1/</u>	R _{LOAD}	V _{DIFF} = 5 V, 8 mA ≤ I _L ≤ 1.5 A	1,2,3	06		±25	mV
		V _{DIFF} = 12 V, 8 mA ≤ I _L ≤ 1.5 A	1			±25	
		V _{DIFF} = 40 V, 8 mA ≤ I _L ≤ 200 mA	1			±25	
		V _{DIFF} = 40 V, 8 mA ≤ I _L ≤ 100 mA	2,3			±50	
Thermal regulation	V _{RTH}	V _{IH} = -14.6 V, I _L = 1.5 A, P _D = 20 watts, t = 10 ms, T _A = +25°C	1	06		±5	mV
Ripple rejection <u>2/</u>	R _N	f = 120 Hz, C _{ADJ} = 10 μF, V _{OUT} = V _{REF}	4,5,6	06	66		dB
Adjustment pin current	I _{ADJ}	V _{DIFF} = 3.0 V	1,2,3,	06		100	μA
		V _{DIFF} = 40 V	1,2,3			100	
Adjustment pin current change	ΔI _{ADJ} (line)	3.0 V ≤ V _{DIFF} ≤ 40 V	1,2,3	06		±5	μA
	ΔI _{ADJ} (load)	V _{DIFF} = 5.0 V, 8 mA ≤ I _L ≤ 1.5 A	1,2,3			±5	
Minimum load current	I _{LMIN}	V _{DIFF} = 3.0 V, V _{OUT} = -1.4 V (forced)	1,2,3	06		3	mA
		V _{DIFF} = 10 V, V _{OUT} = -1.4 V (forced)	1,2,3			3	
		V _{DIFF} = 40 V, V _{OUT} = -1.4 V (forced)	1,2,3			5	
Current limit <u>2/</u>	I _{CL}	V _{DIFF} = 5 V	1,2,3	06	1.5	3.5	A
		V _{DIFF} = 40 V, T _A = +25°C	1		0.24	1.2	

See footnotes at end of table.

<p align="center">STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000</p>	SIZE A		77034
		REVISION LEVEL T	SHEET 21

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Case X							
Reference voltage	V _{REF}	V _{DIFF} = 3.0 V	1	07	1.238	1.262	V
		V _{DIFF} = 3.3 V	2,3		1.225	1.27	
		V _{DIFF} = 40 V	1,2,3		1.225	1.27	
		V _{DIFF} = 60 V	1,2,3		1.225	1.27	
Line regulation <u>3/</u>	R _{LINE}	V _{OUT} = V _{REF} 3.0 V ≤ V _{DIFF} ≤ 40 V	1	07		±4.5	mV
		V _{OUT} = V _{REF} 3.3 V ≤ V _{DIFF} ≤ 40 V	2,3			±9	
		V _{OUT} = V _{REF} 40 V ≤ V _{DIFF} ≤ 60 V	1			±2.5	
		V _{OUT} = V _{REF} 40 V ≤ V _{DIFF} ≤ 60 V	2,3			±4.0	
Load regulation <u>1/</u>	R _{LOAD}	V _{DIFF} = 3 V, 10 mA ≤ I _L ≤ 500 mA	1	07		±15	mV
		V _{DIFF} = 3.3 V, 10 mA ≤ I _L ≤ 500 mA	2,3			±15	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 150 mA	1			±15	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 100 mA	2,3			±15	
		V _{DIFF} = 60 V, 10 mA ≤ I _L ≤ 20 mA	1,2,3			±15	
Thermal regulation	V _{RTH}	V _{IN} = 14.6 V, I _L = 300 mA, P _D = 4 watts, t = 20 ms, T _A = +25°C	1	07		±2	mV
Ripple rejection <u>2/</u>	R _N	f = 120 Hz, C _{ADJ} = 10 μF, V _{OUT} = V _{REF} , I _{OUT} = 100 mA	4,5,6	07	66		dB
Adjustment pin current	I _{ADJ}	V _{DIFF} = 3.0 V	1	07		100	μA
		V _{DIFF} = 3.3 V	2,3			100	
		V _{DIFF} = 40 V	1,2,3			100	
		V _{DIFF} = 60 V	1,2,3			100	

See footnotes at end of table.

<p align="center">STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000</p>	SIZE A		77034
		REVISION LEVEL T	SHEET 22

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Case X - Continued.							
Adjustment pin current change	ΔI _{ADJ}	V _{DIFF} = 3 V, 10 mA ≤ I _L ≤ 500 mA	1	07		±5	μA
		V _{DIFF} = 3.3 V, 10 mA ≤ I _L ≤ 500 mA	2,3			±5	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 150 mA	1			±5	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 100 mA	2,3			±5	
		3.0 V ≤ V _{DIFF} ≤ 40 V	1			±5	
		3.3 V ≤ V _{DIFF} ≤ 40 V	2,3			±5	
		3.3 V ≤ V _{DIFF} ≤ 60 V	1,2,3			±5	
Minimum load current	I _{LMIN}	V _{DIFF} = 3.0 V, V _{OUT} = 1.4 V (forced)	1	07		5	mA
		V _{DIFF} = 3.3 V, V _{OUT} = 1.4 V (forced)	2,3			5	
		V _{DIFF} = 40 V, V _{OUT} = 1.4 V (forced)	1,2,3			5	
		V _{DIFF} = 60 V, V _{OUT} = 1.4 V (forced)	1,2,3			7	
Current limit <u>2</u> /	I _{CL}	V _{DIFF} = 5 V	1,2,3	07	0.50	1.65	A
		V _{DIFF} = 40 V	1		0.15	0.65	
		V _{DIFF} = 60 V	1		0.02	0.28	
Cases M, N, T, U, Y, Z							
Reference voltage	V _{REF}	V _{DIFF} = 3.0 V	1	07	1.238	1.262	V
		V _{DIFF} = 3.3 V	2,3		1.225	1.27	
		V _{DIFF} = 40 V	1,2,3		1.225	1.27	
		V _{DIFF} = 60 V	1,2,3		1.225	1.27	

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 23

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Cases M, N, T, U, Y, Z - Continued							
Line regulation <u>3/</u>	R _{LINE}	V _{OUT} = V _{REF} 3.0 V ≤ V _{DIFF} ≤ 40 V	1	07		±4.5	mV
		V _{OUT} = V _{REF} 3.3 V ≤ V _{DIFF} ≤ 40 V	2,3			±9	
		V _{OUT} = V _{REF} 40 V ≤ V _{DIFF} ≤ 60 V	1			±5	
			2,3			±10	
Load regulation <u>1/</u>	R _{LOAD}	V _{DIFF} = 3 V, 10 mA ≤ I _L ≤ 1.5 A	1	07		±15	mV
		V _{DIFF} = 3.3 V, 10 mA ≤ I _L ≤ 1.5 A	2,3			±15	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 300 mA	1			±15	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 195 mA	2,3			±15	
		V _{DIFF} = 60 V, 10 mA ≤ I _L ≤ 30 mA	1,2,3			±15	
Thermal regulation	V _{RTH}	V _{IN} = 14.6 V, I _L = 1.5 A, P _D = 20 watts, t = 20 ms, T _A = +25°C	1	07		±5	mV
Ripple rejection <u>2/</u>	R _N	f = 120 Hz, C _{ADJ} = 10 μF, V _{OUT} = V _{REF} , I _{OUT} = 100 mA	4,5,6	07	66		dB
Adjustment pin current	I _{ADJ}	V _{DIFF} = 3.0 V	1	07		100	μA
		V _{DIFF} = 3.3 V	2,3			100	
		V _{DIFF} = 40 V	1,2,3			100	
		V _{DIFF} = 60 V	1,2,3			100	

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 24

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Cases M, N, T, U, Y, Z - Continued							
Adjustment pin current change	ΔI _{ADJ}	V _{DIFF} = 3 V, 10 mA ≤ I _L ≤ 1.5 A	1	07		±5	μA
		V _{DIFF} = 3.3 V, 10 mA ≤ I _L ≤ 1.5 A	2,3			±5	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 300 mA	1			±5	
		V _{DIFF} = 40 V, 10 mA ≤ I _L ≤ 195 mA	2,3			±5	
		3.0 V ≤ V _{DIFF} ≤ 40 V	1			±5	
		3.3 V ≤ V _{DIFF} ≤ 40 V	2,3			±5	
		3.3 V ≤ V _{DIFF} ≤ 60 V	1,2,3			±5	
Minimum load current	I _{LMIN}	V _{DIFF} = 3.0 V, V _{OUT} = 1.4 V (forced)	1	07		5	mA
		V _{DIFF} = 3.3 V, V _{OUT} = 1.4 V (forced)	2,3			5	
		V _{DIFF} = 40 V, V _{OUT} = 1.4 V (forced)	1,2,3			5	
		V _{DIFF} = 60 V, V _{OUT} = 1.4 V (forced)	1,2,3			7	
Current limit <u>2</u> /	I _{CL}	V _{DIFF} = 5 V	1,2,3	07	1.50	3.5	A
		V _{DIFF} = 40 V	1		0.3	1.5	
		V _{DIFF} = 60 V	1		0.05	0.50	

Case X

Reference voltage	V _{REF}	V _{DIFF} = 3.0 V	1	08	-1.262	-1.235	V
			2,3		-1.28	-1.22	
		V _{DIFF} = 40 V	1		-1.28	-1.22	
			2,3		-1.28	-1.22	
		V _{DIFF} = 50 V	1		-1.28	-1.22	
			2,3		-1.28	-1.22	

See footnotes at end of table.

<p align="center">STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000</p>	<p align="center">SIZE A</p>		<p align="center">77034</p>
		<p align="center">REVISION LEVEL T</p>	<p align="center">SHEET 25</p>

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Case X - Continued							
Line regulation	R _{LINE}	3.0 V ≤ V _{DIFF} ≤ 50 V	1	08		±10	mV
			2,3			±25	
Load regulation <u>1/</u>	R _{LOAD}	V _{DIFF} = 50 V, 8 mA ≤ I _L ≤ 100 mA	1	08		±25	mV
		V _{DIFF} = 5.0 V, 8 mA ≤ I _L ≤ 500 mA	1			±31	
			2,3			±50	
Thermal regulation	V _{RTH}	V _{IN} = -16.25 V, I _L = 330 mA, T _A = +25°C, P _D = 5 watts, t = 10 ms	1	08		±2	mV
Ripple rejection <u>2/</u>	R _N	f = 120 Hz, C _{ADJ} = 10 μF, V _{OUT} = V _{REF}	4,5,6	08	66		dB
Adjustment pin current	I _{ADJ-1}	V _{DIFF} = 3.0 V	1,2,3	08		100	μA
	I _{ADJ-2}	V _{DIFF} = 40 V	1,2,3			100	
	I _{ADJ-3}	V _{DIFF} = 50 V	1,2,3			100	
Adjustment pin current change	ΔI _{ADJ}	V _{DIFF} = 5 V, 8 mA ≤ I _{OUT} ≤ 200 mA	1,2,3	08		±5	μA
		I _L = 8 mA, 3.0 V ≤ V _{DIFF} ≤ 50 V	1,2,3			±6	
Minimum load current	I _{LMIN}	V _{DIFF} = 3.0 V, V _{OUT} = -1.4 V (forced)	1,2,3	08		3	mA
		V _{DIFF} = 10 V, V _{OUT} = -1.4 V (forced)	1,2,3			3	
		V _{DIFF} = 40 V, V _{OUT} = -1.4 V (forced)	1,2,3			5	
		V _{DIFF} = 50 V, V _{OUT} = -1.4 V (forced)	1,2,3			5	
Current limit <u>2/</u>	I _{CL}	V _{DIFF} = 5 V	1,2,3	08	0.5	1.8	A
		V _{DIFF} = 50 V	1		0.1	0.65	

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 26

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T _A ≤ +125°C I _L = 8 mA unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Cases M, N, T, U, Y, Z							
Reference voltage	V _{REF}	V _{DIFF} = 3.0 V	1	08	-1.262	-1.238	V
			2,3		-1.28	-1.22	
		V _{DIFF} = 50 V	1		-1.28	-1.22	
			2,3		-1.28	-1.22	
Line regulation	R _{LINE}	3.0 V ≤ V _{DIFF} ≤ 50 V	1	08		±6	mV
			2,3			±20	
Load regulation <u>1/</u>	R _{LOAD}	V _{DIFF} = 50 V, 8 mA ≤ I _L ≤ 110 mA	1	08		±25	mV
		V _{DIFF} = 5.0 V, 8 mA ≤ I _L ≤ 1.5 A	1			±25	
			2,3			±50	
Thermal regulation	V _{RTH}	V _{IN} = -14.6 V, I _L = 1.5 A, P _D = 20 watts, t = 10 ms, T _A = +25°C	1	08		±5	mV
Ripple rejection <u>2/</u>	R _N	f = 120 Hz, C _{ADJ} = 10 μF, V _{OUT} = V _{REF}	4,5,6	08	66		dB
Adjustment pin current	I _{ADJ-1}	V _{DIFF} = 3.0 V	1,2,3	08		100	μA
	I _{ADJ-2}	V _{DIFF} = 40 V	1,2,3			100	
	I _{ADJ-3}	V _{DIFF} = 50 V	1,2,3			100	
Adjustment pin current change	ΔI _{ADJ}	V _{DIFF} = 5 V, 8 mA ≤ I _{OUT} ≤ 1.5 A	1,2,3	08		±5	μA
		I _L = 8 mA, 3.0 V ≤ V _{DIFF} ≤ 50 V	1,2,3			±6	
Minimum load current	I _{LMIN}	V _{DIFF} = 3.0 V, V _{OUT} = -1.4 V (forced)	1,2,3	08		3	mA
		V _{DIFF} = 10 V, V _{OUT} = -1.4 V (forced)	1,2,3			3	
		V _{DIFF} = 40 V, V _{OUT} = -1.4 V (forced)	1,2,3			5	
		V _{DIFF} = 50 V, V _{OUT} = -1.4 V (forced)	1,2,3			5	
Current limit <u>2/</u>	I _{CL}	V _{DIFF} = 5 V	1,2,3	08	1.5	3.5	A
		V _{DIFF} = 50 V	1		0.2	1.0	

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 43216-5000

SIZE
A

77034

REVISION LEVEL
T

SHEET
27

TABLE I. Electrical performance characteristics - Continued.

1/ Regulation is measured at a constant junction temperature, using pulse testing with a low duty cycle. Changes in output voltage due to heating effects are covered under the specification for thermal regulation. With exception of cases U and 2, all output measurements are referenced to the case. Measurements taken at the output lead must be adjusted for lead resistance.

2/ If not tested, shall be guaranteed to the specified limits.

3/ To determine the line regulation limits for $3.0\text{ V} \leq V_{\text{DIFF}} \leq 60\text{ V}$ (or $3.3\text{ V} \leq V_{\text{DIFF}} \leq 60\text{ V}$) add the limits for $3.0\text{ V} \leq V_{\text{DIFF}} \leq 40\text{ V}$ (or $3.3\text{ V} \leq V_{\text{DIFF}} \leq 40\text{ V}$) to the limits for $40\text{ V} \leq V_{\text{DIFF}} \leq 60\text{ V}$.

3.5 Marking. The part shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's PIN may also be marked as listed in MIL-HDBK-103. For packages where marking of the entire SMD PIN number is not feasible due to space limitations, the manufacturer has the option of not marking the "5962-" on the device. For RHA product using this option, the RHA designator shall still be marked. Marking for device classes Q and V shall be in accordance with MIL-PRF-38535. Marking for device class M shall be in accordance with MIL-PRF-38535, appendix A.

3.5.1 Certification/compliance mark. The certification mark for device classes Q and V shall be a "QML" or "Q" as required in MIL-PRF-38535. The compliance mark for device class M shall be a "C" as required in MIL-PRF-38535, appendix A.

3.6 Certificate of compliance. For device classes Q and V, a certificate of compliance shall be required from a QML-38535 listed manufacturer in order to supply to the requirements of this drawing (see 6.6.1 herein). For device class M, a certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-HDBK-103 (see 6.6.2 herein). The certificate of compliance submitted to DSCC-VA prior to listing as an approved source of supply for this drawing shall affirm that the manufacturer's product meets, for device classes Q and V, the requirements of MIL-PRF-38535 and herein or for device class M, the requirements of MIL-PRF-38535, appendix A and herein.

3.7 Certificate of conformance. A certificate of conformance as required for device classes Q and V in MIL-PRF-38535 or for device class M in MIL-PRF-38535, appendix A shall be provided with each lot of microcircuits delivered to this drawing.


3.8 Notification of change for device class M. For device class M, notification to DSCC-VA of change of product (see 6.2 herein) involving devices acquired to this drawing is required for any change as defined in MIL-STD-973.

3.9 Verification and review for device class M. For device class M, DSCC, DSCC's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

3.10 Microcircuit group assignment for device class M. Device class M devices covered by this drawing shall be in microcircuit group number 52 (see MIL-PRF-38535, appendix A).

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 28

Case outline M

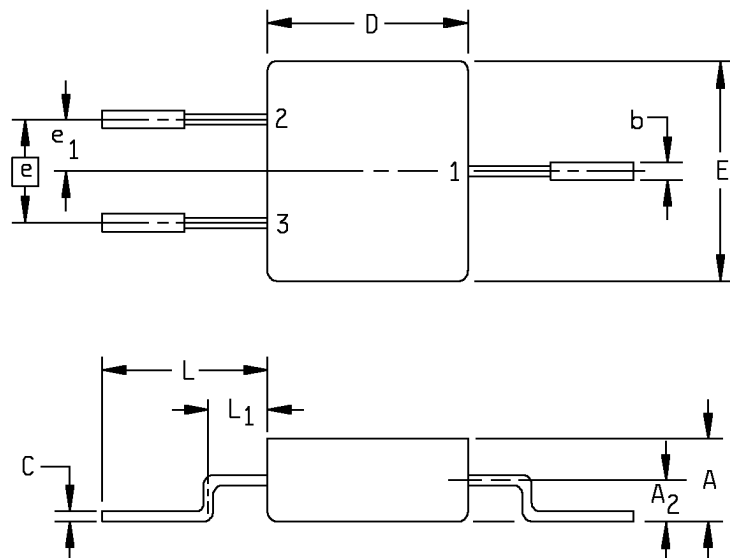

Device types	All
Terminal number	Terminal symbol
1	V _{OUT}
2	ADJUST
3	V _{IN}
CASE	ISOLATED

Symbol	Inches		Millimeters	
	Min	Max	Min	Max
A	.160	---	4.06	---
A ₂	.080	---	2.03	---
b	---	.035	---	0.89
C	.020	---	0.51	---
D	---	.425	---	10.8
E	---	.425	---	10.8
e	.200 BSC		5.08 BSC	
e ₁	.100 BSC		2.54 BSC	
L	.350	---	8.89	---
L ₁	---	.135	---	3.43


NOTES:

1. Dimensions shall be measured in inches.
2. Metric equivalents are given for general information only.
3. Three leads.

FIGURE 1. Case outlines and terminal connections.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 29

Case outline N

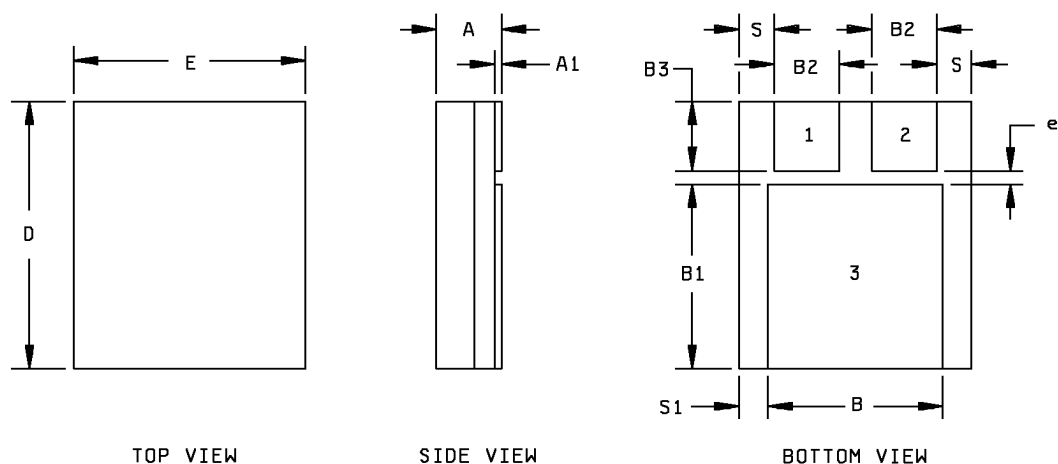

Symbol	Inches		Millimeters	
	Min	Max	Min	Max
A	.130	.150	3.30	3.81
A1	.010	.020	0.25	0.51
B	.370	.380	9.40	9.65
B1	.410	.420	10.41	10.67
B2	.135	.145	3.43	3.68
B3	.152	.162	3.86	4.11
D	.620	.630	15.75	16.00
E	.445	.455	11.30	11.55
e	.030	---	0.76	---
S	.045	.055	1.14	1.40
S1	.035	.045	0.89	1.14

NOTE:

The U.S. government preferred system of measurement is the metric SI system. However, since this item was originally designed using inch-pound units of measurement, in the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.

FIGURE 1. Case outlines and terminal connections – Continued.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 30

Case outlines T and U

Device types	01, 02, 05, 07		03, 04, 06, 08	
Case outlines	T	U	T	U
Terminal number	Terminal symbol			
1	ADJUST	ADJUST	ADJUST	ADJUST
2	V _{OUT}	V _{OUT}	V _{IN}	V _{IN}
3	V _{IN}	V _{IN}	V _{OUT}	V _{OUT}
4	V _{OUT}	NC	V _{IN}	NC

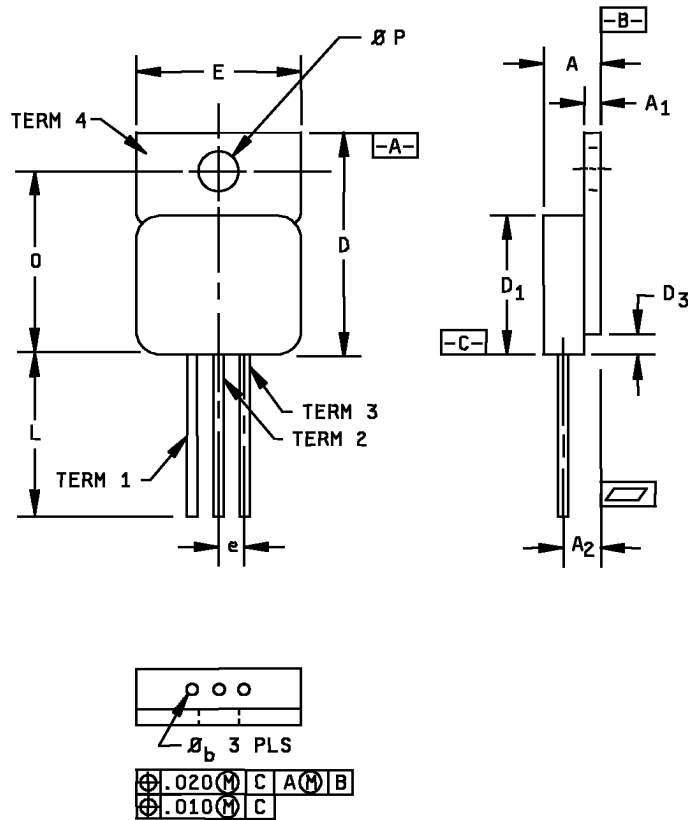


FIGURE 1. Case outlines and terminal connections - Continued.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 31

Case outlines T and U

Symbol	Inches		Millimeters	
	Min	Max	Min	Max
A	.190	.200	4.83	5.08
A ₁	.035	.045	0.89	1.14
A ₂	.120 BSC		3.05 BSC	
φb	.025	.035	0.64	0.89
D	.645	.665	16.38	16.89
D ₁	.410	.430	10.41	10.92
D ₃	.000	.065	0.00	1.65
e	.100 BSC		2.54 BSC	
E	.410	.422	10.41	10.71
L	.500	.750	12.70	19.05
O	.527	.537	13.39	13.64
φP	.140	.150	3.56	3.81


NOTES:

1. Dimensions are in inches.
2. Metric equivalent are given for general information only.

FIGURE 1. Case outlines and terminal connections - Continued.


STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 32

Case outline X

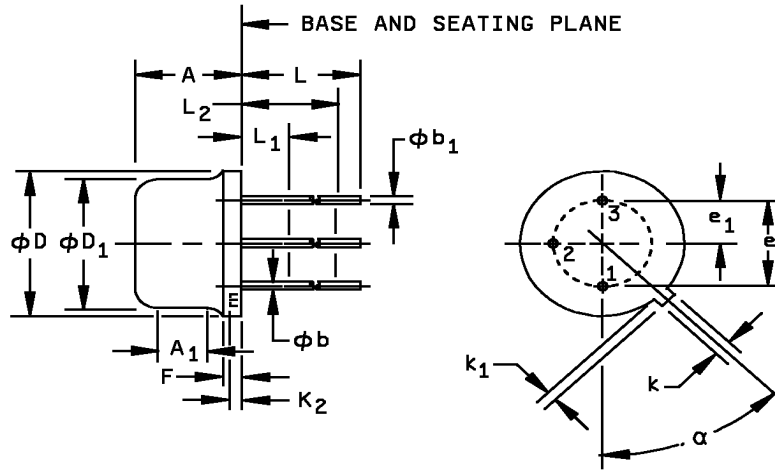


Device types 01, 02, 05, and 07

Device types 03, 04, 06, and 08



Bottom view

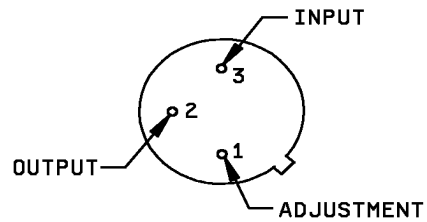

Bottom view

FIGURE 1. Case outlines and terminal connections - Continued.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 33

Case outline X

Symbol	Inches		Millimeters		Notes
	Min	Max	Min	Max	
A	.165	.195	4.19	4.95	
A ₁	.100	---	2.54	---	7
φb	.016	.019	0.41	0.48	3
φb ₁	.016	.021	0.41	0.53	3
φD	.335	.370	8.51	9.40	
φD ₁	.305	.335	7.75	8.51	
e	.200 BSC		5.08 BSC		5
e ₁	.100 BSC		2.54 BSC		5
F	---	.050	---	1.27	
k	.028	.034	0.71	0.86	
k ₁	.029	.045	0.74	1.14	4
k ₂	.009	.041	0.23	1.04	
L	.500	---	12.70	---	
L ₁	---	.050	---	1.27	
L ₂	.250	---	6.35	---	
α	45° T.P.		45° T.P.		5

NOTES:

- Dimensions shall be measured in inches.
- Metric equivalents are given for general information only.
- Nb applies between L₁ and beyond .500 inch (12.70 mm) from the seating plane (two leads). Diameter is uncontrolled in L₁ and beyond .500 inch (12.70 mm) from the seating plane.
- Two leads.
- Two holes.
- Two holes located at true position within diameter .010 inch (0.25 mm).
- Leads having a maximum diameter of .043 inch (1.09 mm) measured in gauging plane .054 inch (1.37 mm) " .001 (0.03 mm) .000 inch (0.00 mm) below the seating plane shall be located at true position within diameter .014 inch (0.36 mm).
- The mounting surface of the header shall be flat to convex within .003 inch (0.08 mm) inside a .930 inch (23.62 mm) diameter circle on the center of the header and flat to convex within .006 inch (0.15 mm) overall.



FIGURE 1. Case outlines and terminal connections - Continued.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 34

Case outline Y

Device types 01, 02, 05, and 07

Device types 03, 04, 06, and 08

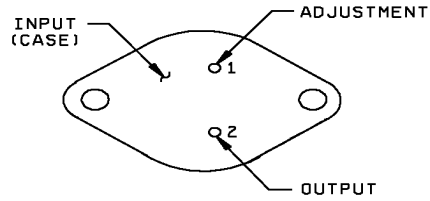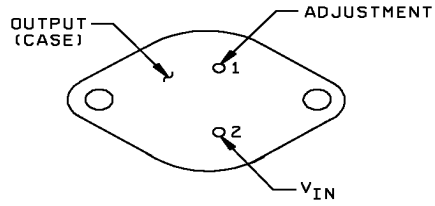

Bottom view

Bottom view


FIGURE 1. Case outlines and terminal connections - Continued.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 35


Case outline Z

Device types 03, 04, 06, and 08

Device types 01, 02, 05, and 07

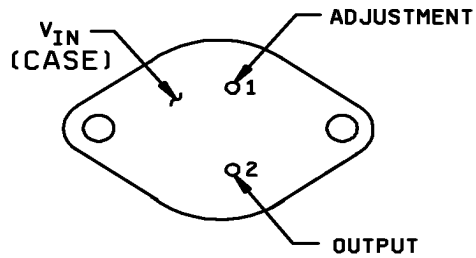

Bottom view

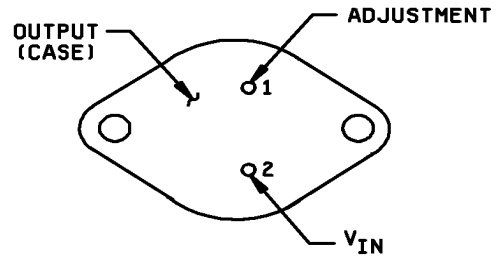

Bottom view

FIGURE 1. Case outlines and terminal connections - Continued.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 36

Device types	01, 05	03, 06
Case outline	2	
Terminal number	Terminal symbol	
1	V_{OUT} SENSE (see note)	V_{OUT}
2	NC	V_{OUT} SENSE (see note)
3	NC	NC
4	NC	NC
5	V_{IN}	NC
6	NC	NC
7	NC	NC
8	NC	NC
9	NC	NC
10	ADJUST	NC
11	NC	V_{IN}
12	NC	NC
13	NC	NC
14	NC	NC
15	NC	NC
16	NC	ADJUST
17	NC	NC
18	NC	NC
19	NC	NC
20	V_{OUT}	NC

NOTE: For normal operation, the V_{OUT} SENSE pin must be connected externally to the load.

FIGURE 1. Case outlines and terminal connections - Continued.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 37

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. For device classes Q and V, sampling and inspection procedures shall be in accordance with MIL-PRF-38535 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein. For device class M, sampling and inspection procedures shall be in accordance with MIL-PRF-38535, appendix A.

4.2 Screening. For device classes Q and V, screening shall be in accordance with MIL-PRF-38535, and shall be conducted on all devices prior to qualification and technology conformance inspection. For device class M, screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection.

4.2.1 Additional criteria for device class M.

- a. Burn-in test, method 1015 of MIL-STD-883.
 - (1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015.
 - (2) $T_A = +125^{\circ}\text{C}$, minimum.
- b. Interim and final electrical test parameters shall be as specified in table IIA herein.

4.2.2 Additional criteria for device classes Q and V.

- a. The burn-in test duration, test condition and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The burn-in test circuit shall be maintained under document revision level control of the device manufacturer's Technology Review Board (TRB) in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015 of MIL-STD-883.
- b. Interim and final electrical test parameters shall be as specified in table IIA herein.
- c. Additional screening for device class V beyond the requirements of device class Q shall be as specified in MIL-PRF-38535, appendix B.

4.3 Qualification inspection for device classes Q and V. Qualification inspection for device classes Q and V shall be in accordance with MIL-PRF-38535. Inspections to be performed shall be those specified in MIL-PRF-38535 and herein for groups A, B, C, D, and E inspections (see 4.4.1 through 4.4.4).

4.4 Conformance inspection. Technology conformance inspection for classes Q and V shall be in accordance with MIL-PRF-38535 including groups A, B, C, D, and E inspections and as specified herein except where option 2 of MIL-PRF-38535 permits alternate in-line control testing. Quality conformance inspection for device class M shall be in accordance with MIL-PRF-38535, appendix A and as specified herein. Inspections to be performed for device class M shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, D, and E inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection.

- a. Tests shall be as specified in table IIA herein.
- b. Subgroups 7, 8, 9, 10, and 11 in table I, method 5005 of MIL-STD-883 shall be omitted.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 38

TABLE IIA. Electrical test requirements.

Test requirements	Subgroups (in accordance with MIL-STD-883, method 5005, table I)	Subgroups (in accordance with MIL-PRF-38535, table III)	
	Device class M	Device class Q	Device class V
Interim electrical parameters (see 4.2)	---	---	---
Final electrical parameters (see 4.2)	1,2,3,4,5,6 1/ 2/	1,2,3,4,5,6 1/ 2/	1,2,3,4,5,6 1/ 2/
Group A test requirements (see 4.4)	1,2,3	1,2,3	1,2,3
Group C end-point electrical parameters (see 4.4)	1	1	1,2,3 3/
Group D end-point electrical parameters (see 4.4)	1	1	1,2,3
Group E end-point electrical parameters (see 4.4)	---	---	---

1/ PDA applies to subgroup 1.

2/ Subgroups 4, 5, and 6, if not tested, shall be guaranteed to the limits specified in table I.

3/ Delta limits as specified in table IIB shall be required where specified and the delta limits shall be computed with reference to the previous end-point electrical parameter

TABLE IIB. Group C delta limits at +25°C.

Test	Device type	Case outline	Limit		Unit
			Min	Max	
V _{REF}	03,04	X, Y		±0.01	V
R _{LINE}	03,04	X, Y		±4	mV
I _{ADJ}	03	X, Y		±10	µA
	04	X, Y		±10	

4.4.2 Group C inspection. The group C inspection end-point electrical parameters shall be as specified in table IIA herein.

4.4.2.1 Additional criteria for device class M. Steady-state life test conditions, method 1005 of MIL-STD-883:

- a. Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.
- b. T_A = +125°C, minimum.
- c. Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

4.4.2.2 Additional criteria for device classes Q and V. The steady-state life test duration, test condition and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The test circuit shall be maintained under document revision level control by the device manufacturer's TRB in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 39

4.4.3 Group D inspection. The group D inspection end-point electrical parameters shall be as specified in table IIA herein.

4.4.4 Group E inspection. Group E inspection is required only for parts intended to be marked as radiation hardness assured (see 3.5 herein).

- a. End-point electrical parameters shall be as specified in table IIA herein.
- b. For device classes Q and V, the devices or test vehicle shall be subjected to radiation hardness assured tests as specified in MIL-PRF-38535 for the RHA level being tested. For device class M, the devices shall be subjected to radiation hardness assured tests as specified in MIL-PRF-38535, appendix A for the RHA level being tested. All device classes must meet the postirradiation end-point electrical parameter limits as defined in table I at $T_A = +25^{\circ}\text{C} \pm 5^{\circ}\text{C}$, after exposure, to the subgroups specified in table IIA herein.
- c. When specified in the purchase order or contract, a copy of the RHA delta limits shall be supplied.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38535 for device classes Q and V or MIL-PRF-38535, appendix A for device class M.

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.

6.1.1 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.2 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished in accordance with MIL-STD-973 using DD Form 1692, Engineering Change Proposal.

6.3 Record of users. Military and industrial users should inform Defense Supply Center Columbus when a system application requires configuration control and which SMD's are applicable to that system. DSCC will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronic devices (FSC 5962) should contact DSCC-VA, telephone (614) 692-0525.

6.4 Comments. Comments on this drawing should be directed to DSCC-VA, Columbus, Ohio 43216-5000, or telephone (614) 692-0674.

6.5 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-PRF-38535 and MIL-HDBK-1331.

6.6 Sources of supply.

6.6.1 Sources of supply for device classes Q and V. Sources of supply for device classes Q and V are listed in QML-38535. The vendors listed in QML-38535 have submitted a certificate of compliance (see 3.6 herein) to DSCC-VA and have agreed to this drawing.

6.6.2 Approved sources of supply for device class M. Approved sources of supply for class M are listed in MIL-HDBK-103. The vendors listed in MIL-HDBK-103 have agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DSCC-VA.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		77034
		REVISION LEVEL T	SHEET 40

STANDARD MICROCIRCUIT DRAWING BULLETIN

DATE: 99-09-23

Approved sources of supply for SMD 77034 are listed below for immediate acquisition information only and shall be added to MIL-HDBK-103 and QML-38535 during the next revision. MIL-HDBK-103 and QML-38535 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DSCC-VA. This bulletin is superseded by the next dated revision of MIL-HDBK-103 and QML-38535.

Standard microcircuit drawing PIN 1/	Vendor CAGE number	Vendor similar PIN 2/	Reference military specification PIN
7703401MA	69210	OM117SM/883B	---
7703401NA	68210	OM1320NM/883B	---
7703401TA	U3158	IP117G/883B	---
	69210	OM117NT/883B	
7703401UA	U3158	IP117IG/883B	---
	27851	FM117S7/883	
	34333	SG117IG/883B	
	69210	OM117ST/883B	
7703401XA	U3158	IP117MH/883	M38510/11703BXX
	3/	LM117H/883B	
	34333	SG117T/883B	
	64155	LM117H/883B	
7703401YA	U3158	IP117K/883	M38510/11704BYX
	3/	LM117K/883	
	34333	SG117K/883B	
	64155	LM117K/883B	
7703401ZA	U3158	IP117R/883	---
	34333	SG117R/883B	
77034012A	34333	SG117L/883B	---
	48726	UC117L/883BC	
	69210	OM1320N2/883B	
7703402MA	69210	OM117HVSM/883B	---
7703402NA	69210	OM1321NM/883B	---
7703402TA	U3158	IP117HVG/883B	---
	69210	OM117HVNT/883B	
7703402UA	U3158	IP117HVIG/883B	---
	27851	FM117HVS7/883	
	69210	OM117HVST/883B	
7703402XA	U3158	IP117MHVH/883	---
	3/	LM117HVH/883B	
	64155	LM117HVH/883B	
7703402YA	U3158	IP117HVK/883	---
	3/	LM117HVK/883	
	64155	LM117HVK/883B	
	69210	OM1321NK/883B	
7703402ZA	U3158	IP117HVR/883	---
77034022A	69210	OM1321N2/883B	---
7703403MA	69210	OM137SM/883B	---
7703403NA	69210	OM1322NM/883B	---
7703403TA	U3158	IP137G/883	---
	69210	OM137NT/883B	
7703403UA	U3158	IP137IG/883B	---
	27851	FM137S7/883	
	34333	SG137IG/883B	
	69210	OM137ST/883B	

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING BULLETIN - Continued

Standard microcircuit drawing PIN 1/	Vendor CAGE number	Vendor similar PIN 2/	Reference military specification PIN
7703403XA	U3158	IP137MH/883	M38510/11803BXX
	27014	LM137H/883	
	34333	SG137T/883B	
	64155	LM137H/883B	
7703403YA	U3158	IP137K/883	M38510/11804BYX
	27014	LM137K/883	
	34333	SG137K/883B	
	64155	LM137K-883B	
	69210	OM1322NK/883B	
7703403ZA	U3158	IP137R/883	---
	34333	SG137R/883B	
77034032A	34333	SG137L/883B	---
	69210	OM1322N2/883B	
7703404MA	69210	OM137HVSM/883B	---
7703404NA	69210	OM1323NM/883B	---
7703404TA	U3158	IP137HVG/883	---
	69210	OM137HVNT/883B	
7703404UA	U3158	IP137HVG/883	---
	27851	FM137HV/883	
	69210	OM137HVST/883B	
7703404XA	U3158	IP137MHVH/883	---
	27014	LM137HVH/883	
	64155	LM137HVH/883	
7703404YA	U3158	IP137HVK/883	---
	27014	LM137HVK/883	
	64155	LM137HVK/883B	
	69210	OM1323NK/883B	
7703404ZA	U3158	IP137HVR/883	---
77034042A	69210	OM1323N2/883B	---
7703405MA	69210	OM117ASM/883B	---
7703405NA	69210	OM1324NM/883B	---
7703405TA	U3158	IP117AG/883	---
	69210	OM117ANT/883B	
7703405UA	U3158	IP117AIG/883	---
	27851	FM117AS7/883	
	34333	SG117AIG/883B	
	69210	OM117AST/883B	
7703405XA	U3158	IP117MAH/883	---
	34333	SG117AT/883B	
	64155	LT117AH/883B	
7703405YA	U3158	IP117AK/883	---
	34333	SG117AK/883B	
	64155	LT117AK/883B	
	69210	OM1324NK/883B	
7703405ZA	U3158	IP117AR/883	---
	34333	SG117AR/883B	
77034052A	34333	SG117AL/883B	---
	48726	UC117AL/883BC	
	69210	OM1324N2/883B	
7703406MA	69210	OM137ASM/883B	---
7703406NA	69210	OM1325NM/883	---
7703406TA	U3158	IP137AG/883	---
	69210	OM137ANT/883B	

See footnotes at end of table.

STANDARD MICROCIRCUIT DRAWING BULLETIN - Continued

Standard microcircuit drawing PIN 1/	Vendor CAGE number	Vendor similar PIN 2/	Reference military specification PIN
7703406UA	U3158	IP137AIG/883	---
	27851	FM137AS7	
	34333	SG137AIG/883B	
	69210	OM137AST/883B	
7703406XA	U3158	IP137AH/883	---
	34333	SG137AT/883B	
	64155	LT137AH/883B	
7703406YA	U3158	IP137AK/883	---
	34333	SG137AK/883B	
	64155	LT137AK/883B	
	69210	OM1325NK/883B	
7703406ZA	U3158	IP137AR/883	---
	34333	SG137AR/883B	
77034062A	34333	SG137AL/883B	---
	69210	OM1325N2/883B	
	69210	OM117AHVSM/883B	
7703407MA	69210	OM1326NM/883B	---
7703407NA	69210	OM1326NM/883B	---
7703407TA	U3158	IP117AHVG/883	---
	69210	OM117AHVNT/883B	
7703407UA	U3158	IP117AHVIG/883	---
	27851	FM117AHVS7	
	69210	OM117AHVST/883B	
7703407XA	U3158	IP117AHVH/883	---
	64155	LT117AHVH/883B	
7703407YA	U3158	IP117AHVK/883	---
	64155	LT117AHVK/883B	
	69210	OM1326NK/883B	
7703407ZA	U3158	IP117AHVR/883	---
77034072A	69210	OM1326N2/883B	---
7703408MA	69210	OM137AHVSM/883B	---
7703408NA	69210	OM1327NM/883B	---
7703408TA	U3158	IP137AHVG/883	---
	69210	OM137AHVNT/883B	
7703408UA	U3158	IP137AHVIG/883B	---
	27851	FM137AHV/883	
	69210	OM137AHVST/883B	
7703408XA	U3158	IP137AHVH/883	---
	64155	LT137AHVH/883B	
7703408YA	U3158	IP137AHVK/883B	---
	64155	LT137AHVK/883B	
	69210	OM1327NK/883B	
7703408ZA	U3158	IP137AHVR/883	---
77034082A	69210	OM1327N2/883B	---
5962-7703404VXA	27014	LM137HVH-QMLV	---
5962-7703404VYA	27014	LM137HVK-QMLV	---

1/ The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed contact the vendor to determine its availability.

2/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

3/ Not available from an approved source of supply.

STANDARD MICROCIRCUIT DRAWING BULLETIN - Continued

<u>Vendor CAGE number</u>	<u>Vendor name and address</u>
U3158	SEMELAB PLC Coventry Road, Lutterworth, Leicestershire LE174JB United Kingdom Point of contact: Martinez & Associates 19 Palham Island Road Wayland, MA 01778
27014	National Semiconductor 2900 Semiconductor Drive P.O. Box 58090 Santa Clara, CA 95052-8090
27851	Film Microelectronics Incorporated 530 Turnpike Street North Andover, MA 01845-5812
34333	Lifinity Microelectronics Incorporated 11861 Western Avenue Garden Grove, CA 92841
48726	Unitrode Integrated Circuits Corporation 7 Continental Boulevard Merrimack, NH 03054
64155	Linear Technology Corporation 1630 McCarthy Boulevard Milpitas, CA 95035-7487
69210	Omnirel Corporation 205 Crawford Street Leominster, MA 01453-2353

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in the information bulletin.