




Metallized Polyester Capacitors

AC1313TF

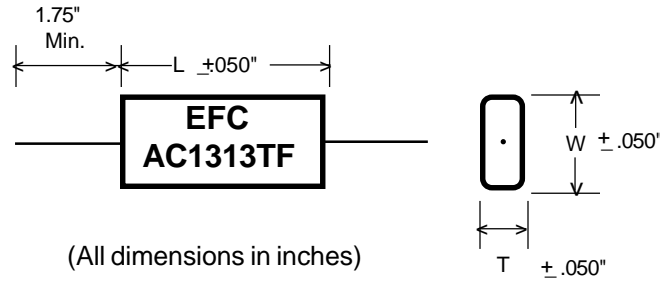

Oval Wrap and Fill

Lead Specs
 Tinned Copperweld
 Under .250D = 24 AWG
 .250 - .440D = 22 AWG
 Above .440D = 20 AWG

DIMENSIONS and RATINGS

Cap. μF	AC1313TF-3 150 VAC 60 HZ			AC1313TF-3 250 VAC 60 HZ		
	T	W	L	T	W	L
.047	.125	.250	.625	.140	.265	.625
.056	.125	.250	.625	.140	.312	.625
.068	.125	.250	.625	.140	.312	.625
.082	.125	.250	.625	.171	.375	.625
.1	.125	.250	.625	.171	.375	.625
.12	.140	.312	.625	.140	.312	1.000
.15	.156	.343	.625	.140	.312	1.000
.18	.171	.343	.625	.171	.343	1.000
.22	.171	.343	.625	.171	.343	1.000
.27	.140	.265	1.000	.203	.406	1.000
.33	.156	.343	1.000	.203	.406	1.000
.39	.140	.312	1.000	.218	.515	1.000
.47	.156	.343	1.000	.218	.515	1.000
.56	.171	.375	1.000	.265	.562	1.000
.68	.171	.375	1.000	.265	.562	1.000
.82	.187	.484	1.000	.234	.531	1.500
1.0	.187	.484	1.000	.234	.531	1.500
1.5	.234	.578	1.000	.296	.593	1.500
2.0	.281	.578	1.000	.328	.718	1.500
2.5	.296	.640	1.500	.437	.921	2.000
3.0	.328	.718	1.500	.421	.906	2.500
4.0	.312	.703	2.000	.468	1.062	2.500
5.0	.359	.750	2.000	.546	1.140	2.500
6.0	.343	.734	2.500	.578	1.265	2.500
7.0	.375	.785	2.500	.640	1.328	2.500
8.0	.375	.859	2.500	.640	1.421	2.500
10.0	.421	.908	2.500	.765	1.546	2.500
12.0	.488	1.062	2.500			

NOTES:

1. EFC Series AC1313TF capacitors are designed for general purpose 60 HZ applications.
2. Quality AC applications are assured through the use of specially metallized dielectrics and end terminations.
3. For 85 °C operation, a 75% derating is recommended.

ELECTRONIC FILM CAPACITORS, INC.

Reidville Industrial Park * 41 Interstate Lane * WATERBURY, CONNECTICUT 06705

Phone (203) 755-5629

FAX (203) 755-0659

www.DataSheet4U.com

EFC will manufacture to any non-standard value and size. Please consult factory for special requirements.