

MICROWAVE SEMICONDUCTOR TECHNICAL DATA

TMD1414-2 TMD1414-2B TMD1414-2C

FEATURES

- Suitable for Ku-band VSAT
- High Power $P_{1dB}=34.5\text{dBm(TYP.)}$
- High Power Added Efficiency $\eta_{add}=29\%(TYP.)$
- High Gain $G_{1dB}=26\text{dB(TYP.)}$
- Broadband Operation $f=13.75 - 14.5\text{GHz.}$

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

| CHARACTERISTICS | SYMBOL | UNIT | RATINGS |
|----------------------|--------|------|------------|
| DRAIN SUPPLY VOLTAGE | VDD | V | 10 |
| GATE SUPPLY VOLTAGE | VGG | V | -10 |
| INPUT POWER | Pin | dBm | 20 |
| FLANGE TEMPERATURE | Tf | °C | -40 - +90 |
| STORAGE TEMPERATURE | Tstg | °C | -65 - +175 |


RF PERFORMANCE SPECIFICATIONS ($T_a=25^\circ\text{C}$)

| CHARACTERISTICS | SYMBOL | CONDITION | UNIT | MIN. | TYP. | MAX. |
|---|--------------|------------------------|------|-------|-------|-----------|
| Operating Frequency | f | | GHz | 13.75 | - | 14.5 |
| Output Power at 1dB Gain Compression Point | P1dB | VDD=7V | dBm | 32.0 | 34.5 | - |
| Power Gain at 1dB Gain Compression Point | G1dB | VGG=-5V | dB | 21.0 | 26.0 | - |
| Gain Flatness | G | | dB | - | - | ± 1.0 |
| Drain Current | IDD | | A | - | 1.4 | 1.8 |
| Power Added Efficiency | η_{add} | | % | - | 29 | - |
| Third Order Intercept Point | IP3 | | dBm | - | 40 | - |
| VSWRin (small signal) | VSWRin | | - | - | 2.0:1 | 2.5:1 |
| VSWRout (small signal) | VSWRout | | - | - | 2.0:1 | 3.0:1 |
| Detector Output Voltage* | Vdet | @P ₀ =33dBm | V | - | 3.0 | - |


*: For 2B,2C

- ◆ The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
- ◆ The information contained herein may be changed without prior notice. It is therefore advisable to contact TOSHIBA before proceeding with design of equipment incorporating this product.


Package Outline (TMD1414-2)

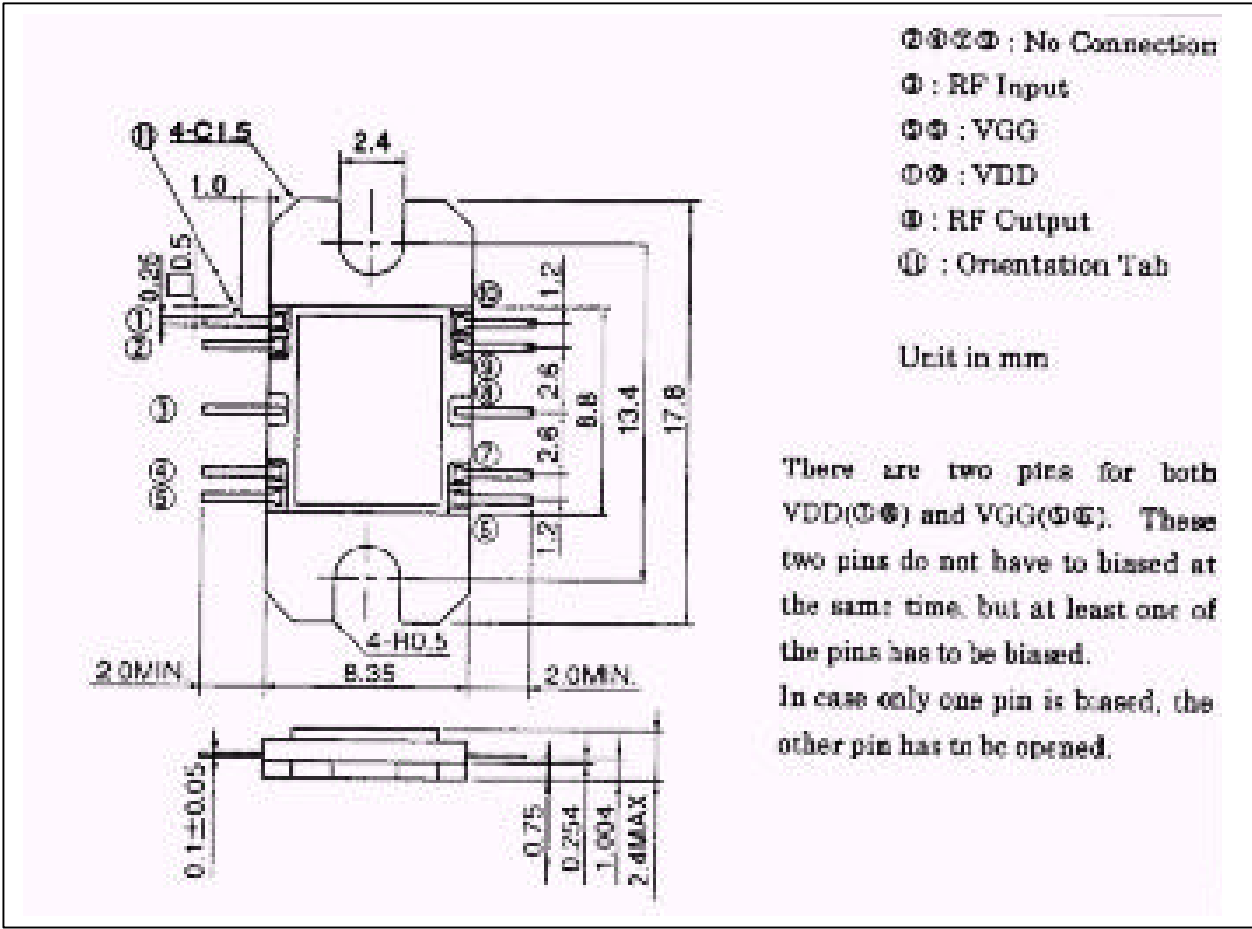


Recommended Bias Configuration (TMD1414-2)

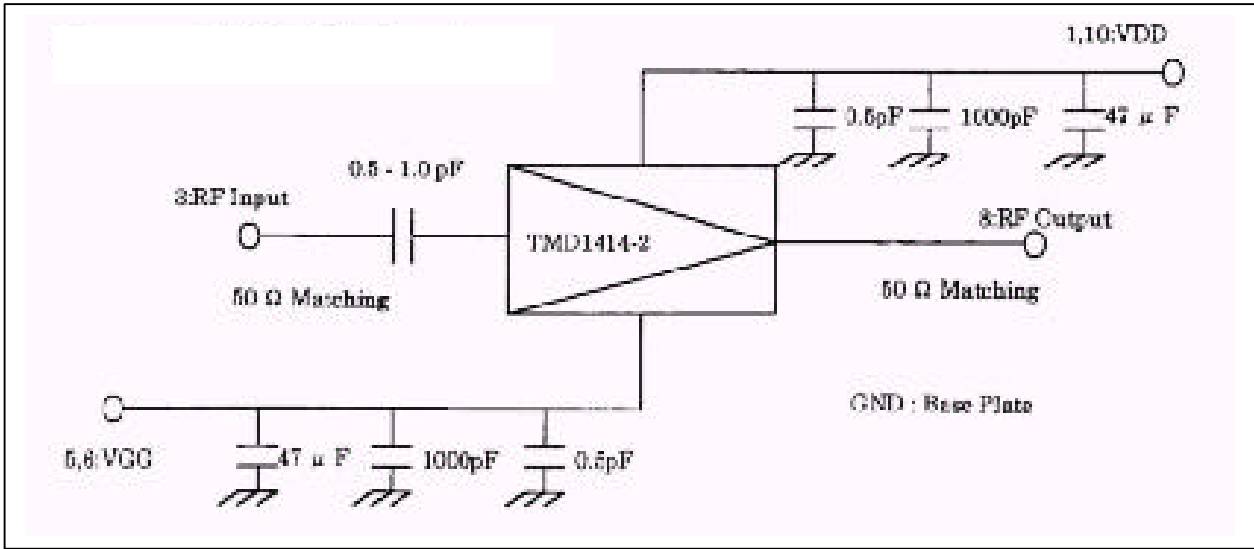


Package Outline (TMD1414-2B)

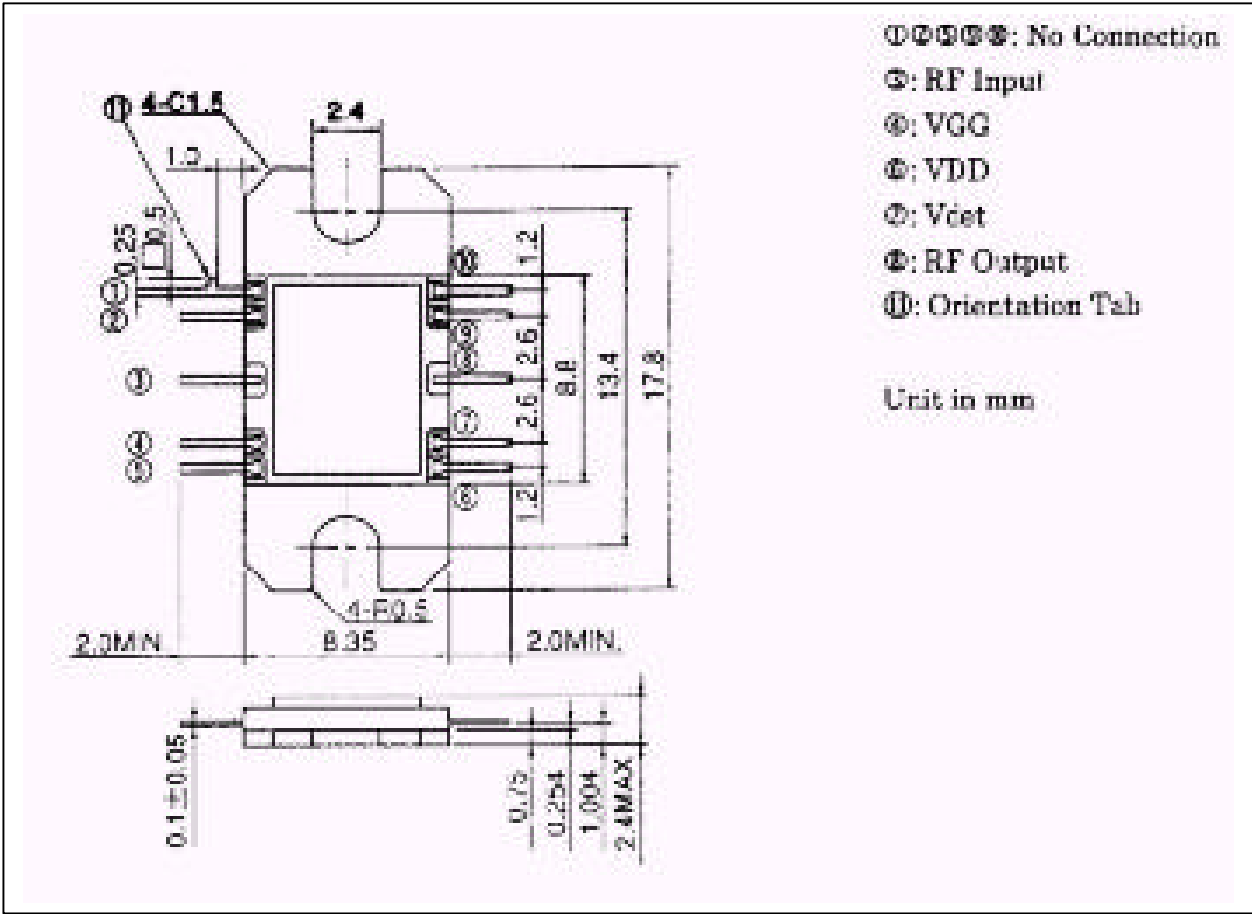


Recommended Bias Configuration (TMD1414-2B)

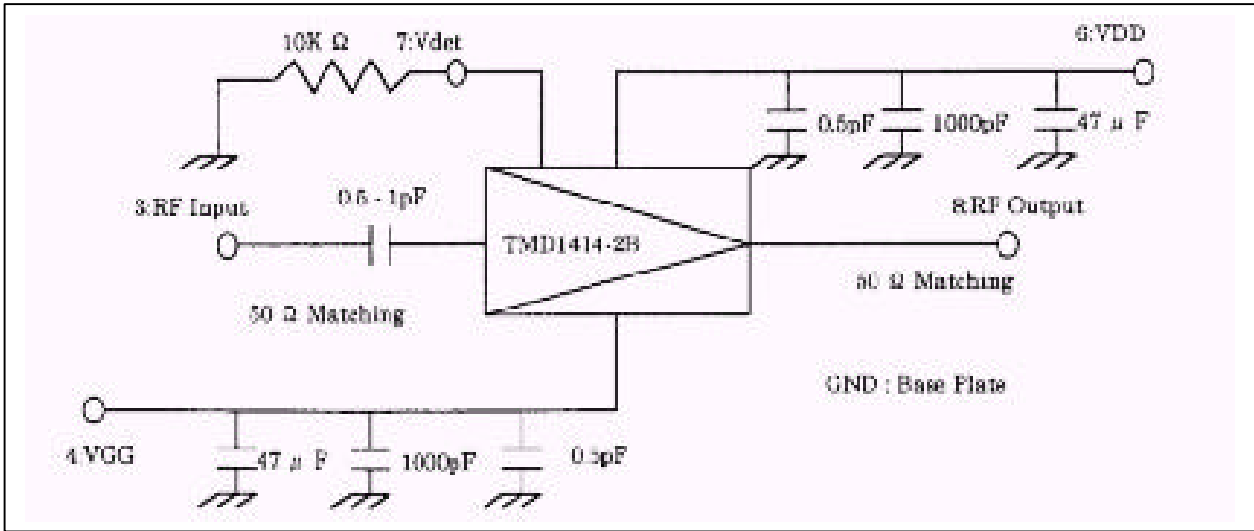

Package Outline (TMD1414-2C)

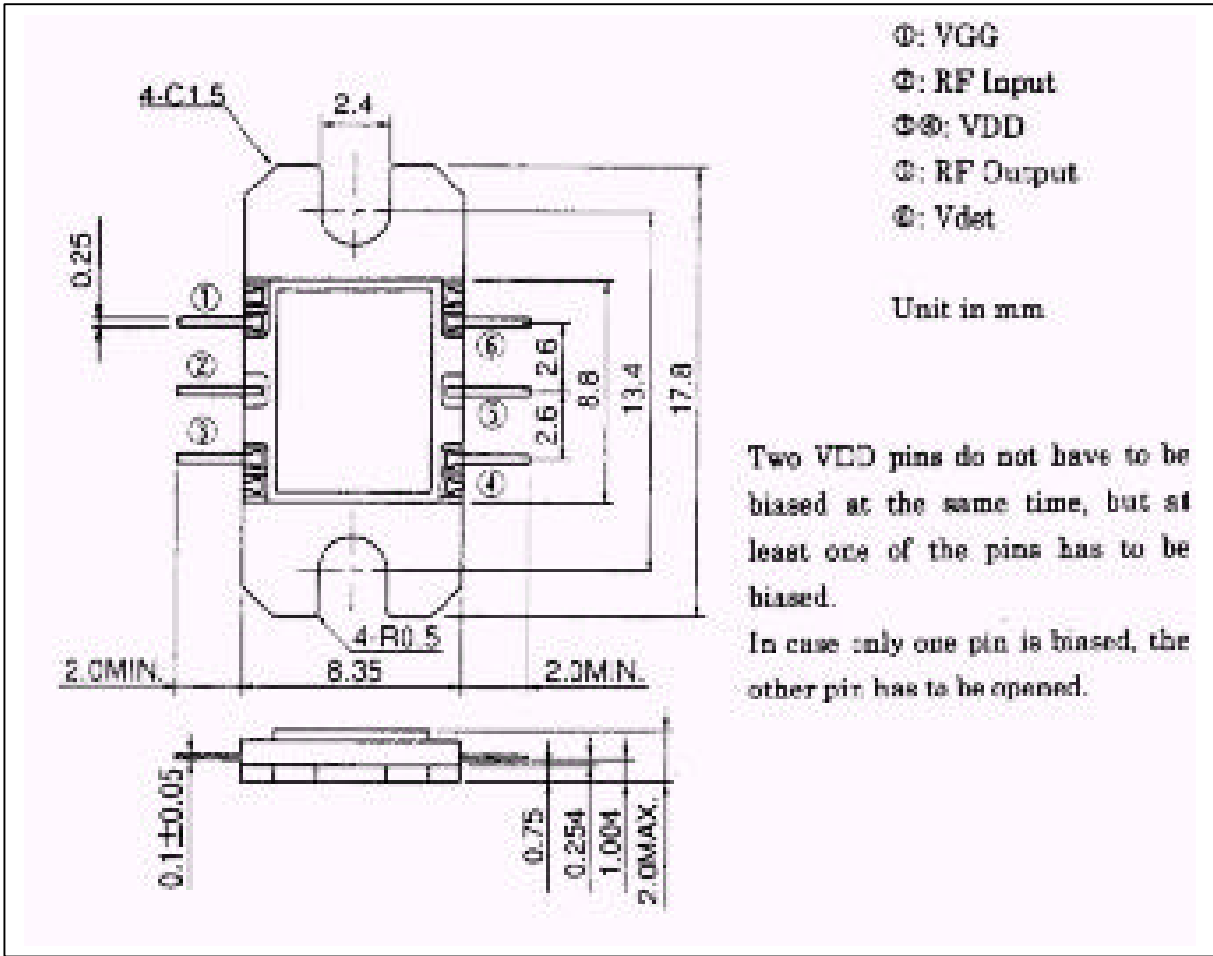

Recommended Bias Configuration (TMD1414-2C)

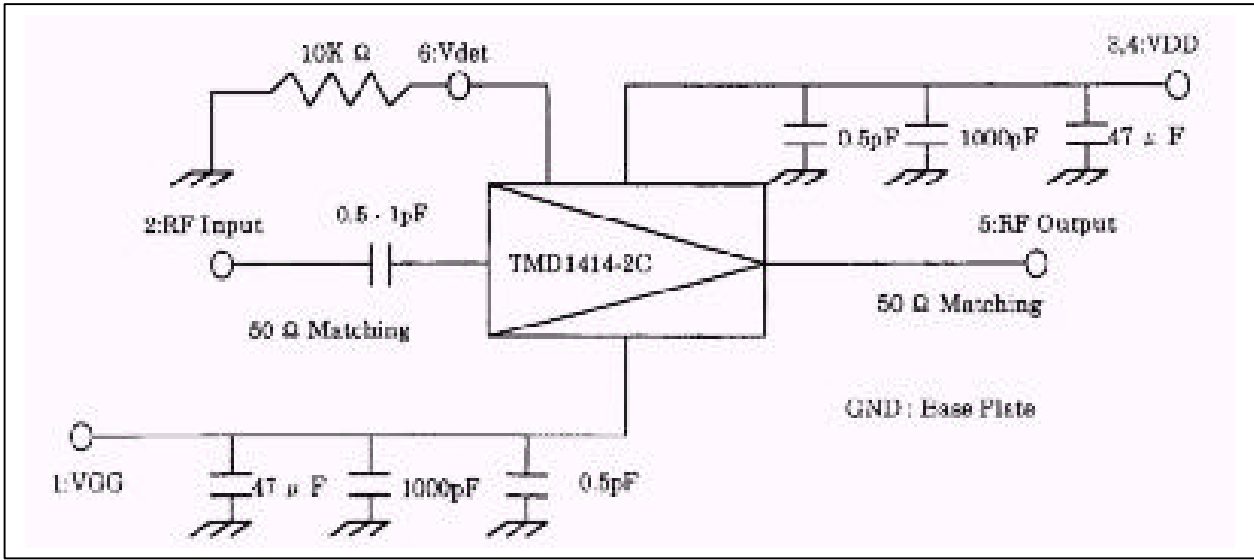



S-Parameters (TMD1414-2/2B/2C)

! S-PARAMETERS FOR TMD1414-2 VDD=7 V, VGG=-5V

GHZ S M A R 50


| ! FREQ | S11 | | S21 | | S12 | | S22 | | ANG |
|--------|-------|-------|--------|--------|-------|-------|-------|--------|-----|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG | |
| 13.475 | 0.247 | -79.9 | 15.958 | 58.0 | 0.004 | 146.2 | 0.415 | -90.2 | |
| 13.500 | 0.240 | -79.4 | 16.107 | 55.0 | 0.004 | 150.0 | 0.417 | -91.2 | |
| 13.525 | 0.234 | -78.8 | 16.295 | 52.0 | 0.004 | 155.5 | 0.418 | -92.3 | |
| 13.550 | 0.229 | -78.1 | 16.469 | 49.0 | 0.004 | 141.2 | 0.421 | -93.3 | |
| 13.575 | 0.224 | -77.1 | 16.646 | 45.9 | 0.005 | 145.3 | 0.423 | -94.3 | |
| 13.600 | 0.218 | -76.2 | 16.847 | 42.7 | 0.005 | 146.6 | 0.425 | -95.5 | |
| 13.625 | 0.213 | -75.0 | 17.001 | 39.5 | 0.004 | 141.5 | 0.426 | -96.7 | |
| 13.650 | 0.208 | -74.0 | 17.157 | 36.4 | 0.004 | 139.0 | 0.429 | -97.8 | |
| 13.675 | 0.202 | -72.9 | 17.349 | 33.3 | 0.005 | 144.9 | 0.432 | -99.0 | |
| 13.700 | 0.198 | -71.7 | 17.519 | 30.2 | 0.005 | 138.8 | 0.435 | -100.3 | |
| 13.725 | 0.194 | -70.7 | 17.739 | 26.9 | 0.004 | 141.5 | 0.436 | -101.7 | |
| 13.750 | 0.190 | -69.4 | 17.915 | 23.6 | 0.005 | 144.8 | 0.438 | -103.0 | |
| 13.775 | 0.186 | -68.4 | 18.098 | 20.3 | 0.005 | 135.4 | 0.441 | -104.6 | |
| 13.800 | 0.183 | -67.0 | 18.293 | 17.0 | 0.006 | 142.5 | 0.445 | -106.1 | |
| 13.825 | 0.181 | -65.6 | 18.476 | 13.7 | 0.005 | 145.1 | 0.448 | -107.5 | |
| 13.850 | 0.177 | -64.4 | 18.674 | 10.2 | 0.005 | 140.0 | 0.449 | -109.3 | |
| 13.875 | 0.174 | -63.0 | 18.832 | 6.9 | 0.005 | 136.6 | 0.452 | -110.9 | |
| 13.900 | 0.171 | -61.7 | 19.025 | 3.5 | 0.005 | 128.7 | 0.455 | -112.7 | |
| 13.925 | 0.169 | -60.2 | 19.236 | 0.0 | 0.005 | 138.8 | 0.456 | -114.5 | |
| 13.950 | 0.166 | -59.3 | 19.415 | -3.6 | 0.006 | 139.5 | 0.459 | -116.3 | |
| 13.975 | 0.164 | -57.8 | 19.581 | -7.1 | 0.006 | 134.3 | 0.460 | -118.3 | |
| 14.000 | 0.163 | -56.4 | 19.740 | -10.8 | 0.006 | 135.0 | 0.462 | -120.4 | |
| 14.025 | 0.161 | -55.3 | 19.900 | -14.4 | 0.006 | 134.4 | 0.463 | -122.6 | |
| 14.050 | 0.159 | -53.7 | 20.041 | -18.0 | 0.006 | 131.8 | 0.464 | -124.6 | |
| 14.075 | 0.158 | -52.4 | 20.195 | -21.7 | 0.006 | 133.0 | 0.466 | -126.8 | |
| 14.100 | 0.157 | -51.2 | 20.309 | -25.5 | 0.007 | 134.5 | 0.466 | -129.0 | |
| 14.125 | 0.155 | -50.1 | 20.445 | -29.3 | 0.006 | 134.5 | 0.467 | -131.5 | |
| 14.150 | 0.154 | -48.6 | 20.539 | -33.0 | 0.006 | 128.5 | 0.465 | -133.8 | |
| 14.175 | 0.153 | -47.9 | 20.641 | -36.8 | 0.006 | 132.1 | 0.465 | -136.2 | |
| 14.200 | 0.152 | -46.7 | 20.715 | -40.7 | 0.006 | 130.3 | 0.466 | -138.8 | |
| 14.225 | 0.150 | -44.9 | 20.751 | -44.6 | 0.007 | 134.3 | 0.467 | -141.6 | |
| 14.250 | 0.149 | -43.9 | 20.790 | -48.5 | 0.008 | 130.7 | 0.464 | -144.2 | |
| 14.275 | 0.148 | -42.6 | 20.787 | -52.5 | 0.007 | 125.1 | 0.462 | -146.9 | |
| 14.300 | 0.146 | -41.3 | 20.788 | -56.3 | 0.007 | 131.7 | 0.460 | -149.7 | |
| 14.325 | 0.145 | -39.4 | 20.761 | -60.4 | 0.008 | 123.5 | 0.455 | -152.5 | |
| 14.350 | 0.143 | -37.8 | 20.708 | -64.4 | 0.007 | 124.8 | 0.452 | -155.4 | |
| 14.375 | 0.140 | -35.4 | 20.610 | -68.3 | 0.008 | 123.0 | 0.447 | -158.4 | |
| 14.400 | 0.139 | -33.4 | 20.504 | -72.3 | 0.008 | 119.0 | 0.441 | -161.2 | |
| 14.425 | 0.138 | -31.0 | 20.373 | -76.3 | 0.008 | 120.3 | 0.434 | -164.2 | |
| 14.450 | 0.136 | -28.4 | 20.220 | -80.2 | 0.008 | 120.5 | 0.427 | -167.3 | |
| 14.475 | 0.136 | -25.7 | 20.023 | -84.2 | 0.008 | 119.9 | 0.418 | -170.2 | |
| 14.500 | 0.137 | -23.1 | 19.813 | -88.0 | 0.008 | 118.1 | 0.411 | -173.2 | |
| 14.525 | 0.138 | -20.3 | 19.592 | -91.8 | 0.008 | 115.8 | 0.402 | -176.1 | |
| 14.550 | 0.141 | -17.6 | 19.371 | -95.7 | 0.009 | 115.4 | 0.393 | -179.1 | |
| 14.575 | 0.144 | -14.6 | 19.094 | -99.3 | 0.008 | 113.2 | 0.385 | -177.9 | |
| 14.600 | 0.148 | -11.6 | 18.830 | -103.0 | 0.008 | 115.2 | 0.375 | -174.9 | |
| 14.625 | 0.153 | -8.9 | 18.536 | -106.6 | 0.009 | 113.6 | 0.365 | -172.1 | |
| 14.650 | 0.158 | -6.9 | 18.292 | -110.2 | 0.009 | 111.5 | 0.355 | -169.3 | |
| 14.675 | 0.164 | -5.2 | 17.990 | -113.7 | 0.009 | 105.5 | 0.345 | -166.4 | |
| 14.700 | 0.172 | -3.9 | 17.700 | -117.0 | 0.009 | 111.0 | 0.335 | -163.7 | |
| 14.725 | 0.180 | -2.5 | 17.429 | -120.4 | 0.009 | 108.2 | 0.325 | -160.9 | |

TYPICAL RF PERFORMANCE

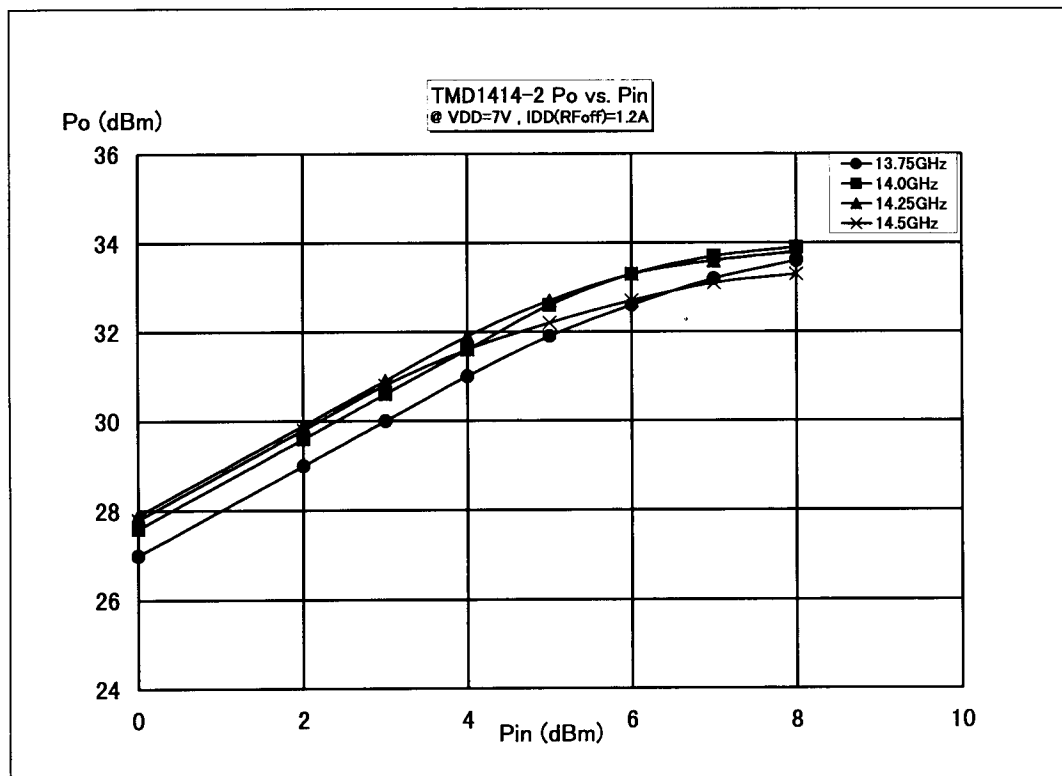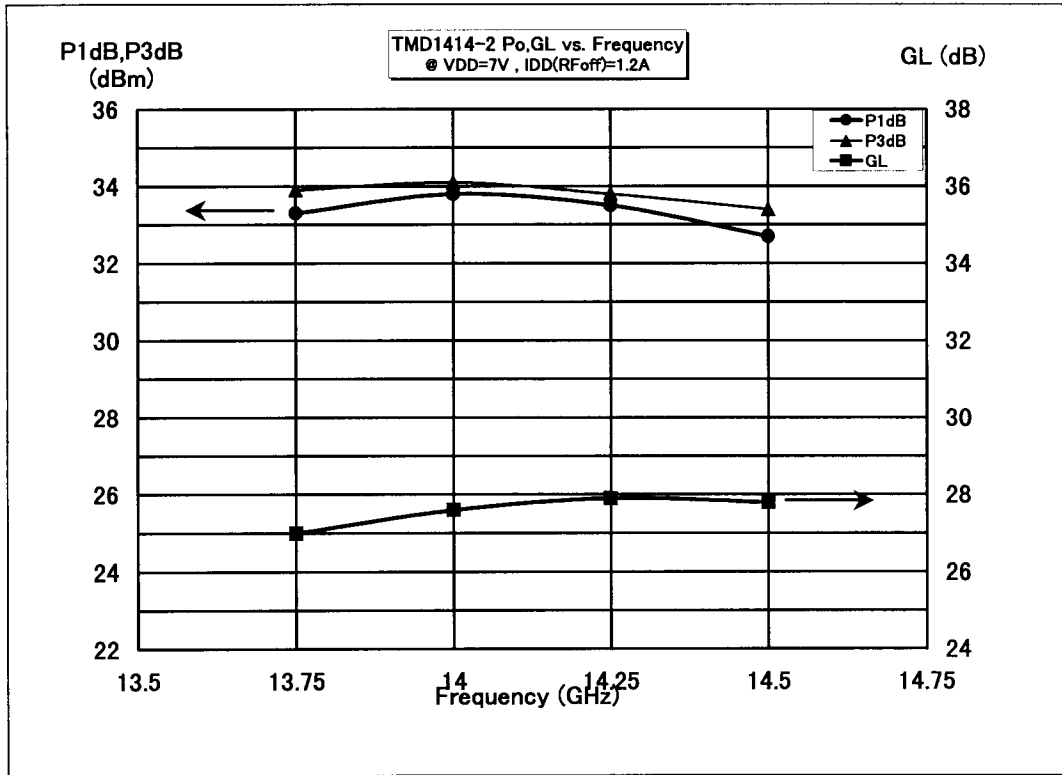

H. OUTLINE OF TEST JIG AND BIAS CIRCUIT FOR TMD1414-02 / -1 / -2

Unit in mm

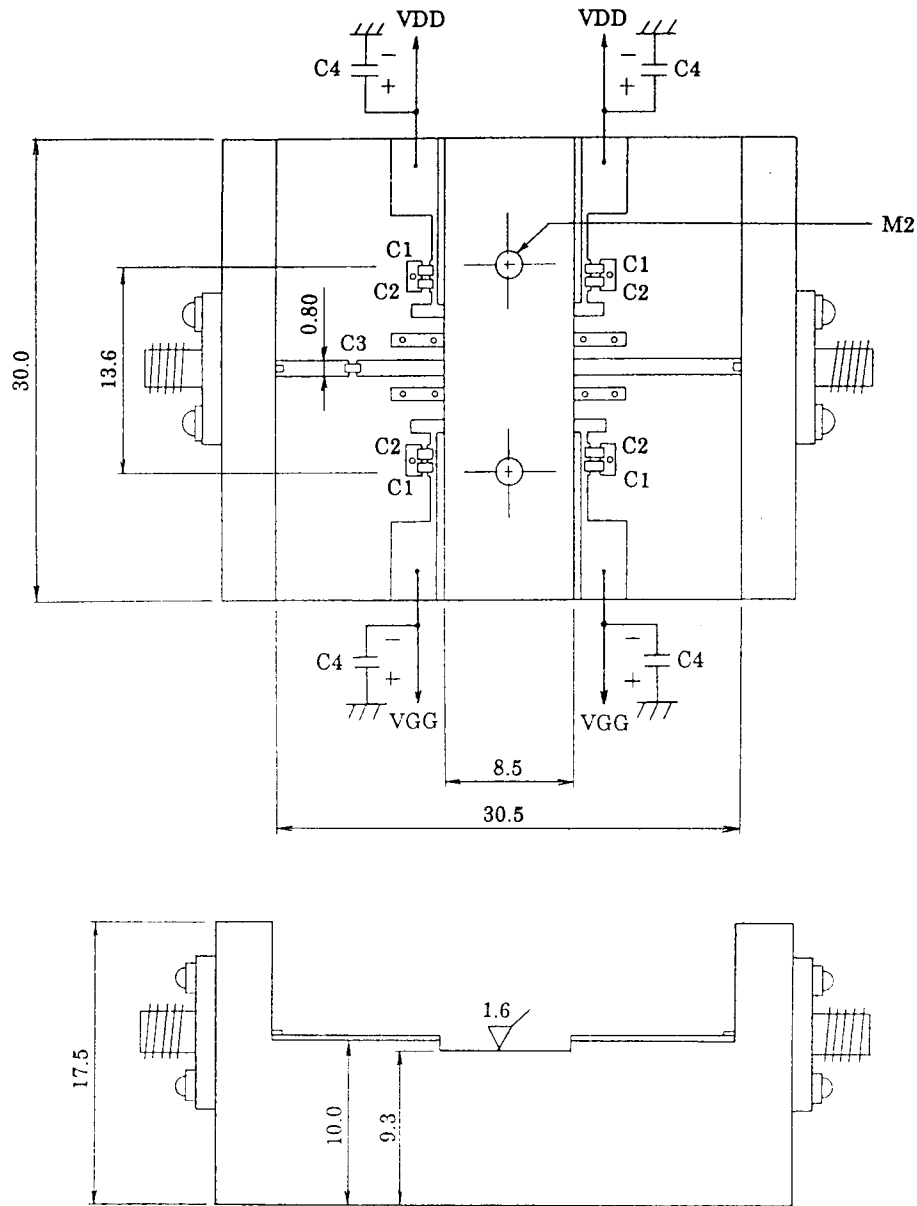

Substrate : Thickness = 0.25 mm, $\epsilon_r = 2.2$


Microstripline : $t = 35 \mu\text{m}$

$C1 = 1,000 \text{ pF}$, $C2 = 0.5 \text{ pF}$, $C3 = 0.5 - 1.0 \text{ pF}$, $C4 = 47 \mu\text{F}$

- * There are two pins for both VDD and VGG. These two pins do not have to be biased at the same time, but at least one of the pins has to be biased. In case only one pin is biased, the other pin has to be opened.

I. OUTLINE OF TEST JIG AND BIAS CIRCUIT FOR TMD1414-02B / -1B / -2B

Unit in mm

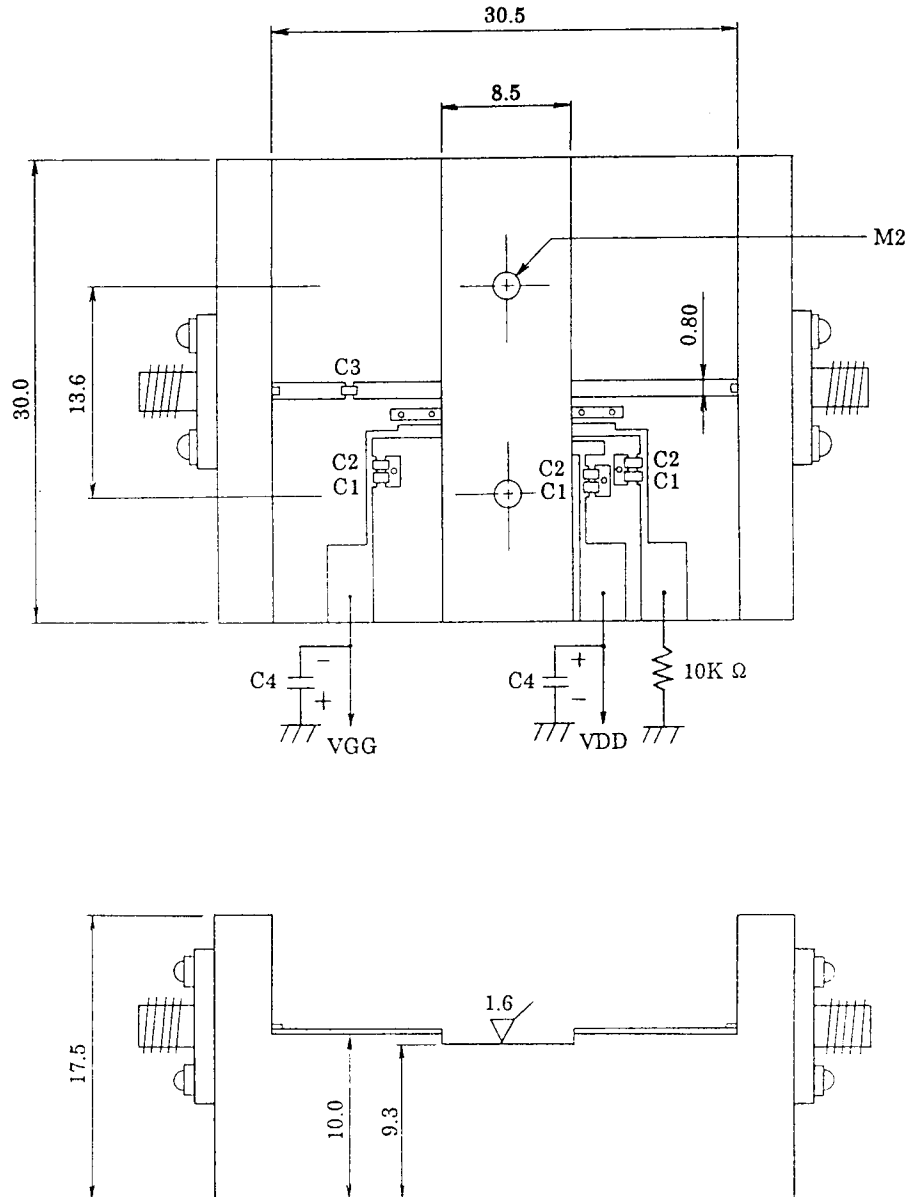


Substrate : Thickness = 0.25 mm, $\epsilon_r = 2.2$

Microstripline : $t = 35 \mu\text{m}$

C1 = 1,000 pF , C2 = 0.5 pF , C3 = 0.5 - 1.0 pF , C4 = 47 μF

J. OUTLINE OF TEST JIG AND BIAS CIRCUIT FOR TMD1414-02C / -1C / -2C

Unit in mm

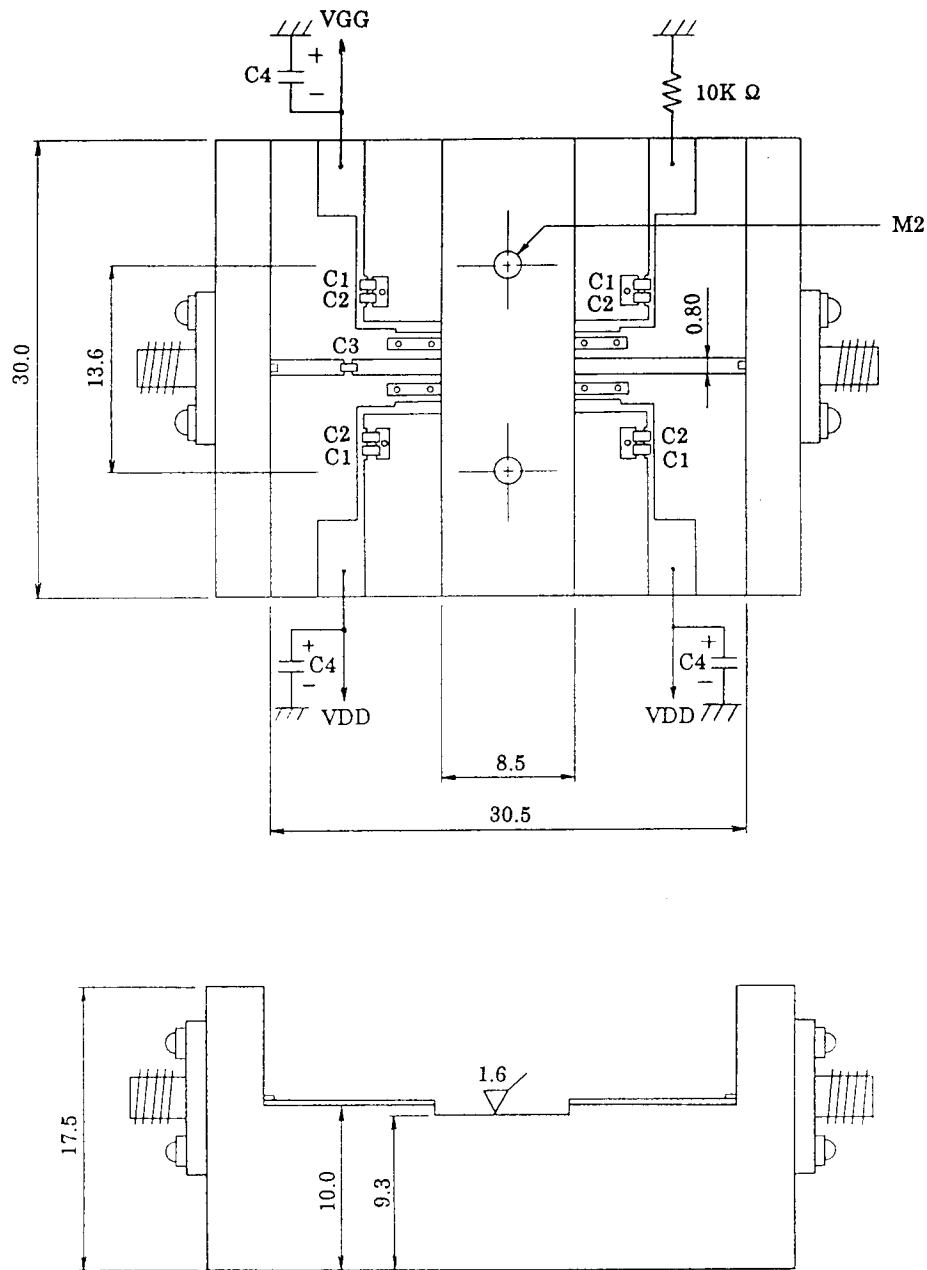

Substrate : Thickness = 0.25 mm, $\epsilon_r = 2.2$

Microstripline : $t = 35 \mu\text{m}$

$C1 = 1,000 \text{ pF}$, $C2 = 0.5 \text{ pF}$, $C3 = 0.5 - 1.0 \text{ pF}$, $C4 = 47 \mu\text{F}$

* Two VDD pins do not have to be biased at the same time, but at least one of the pins has to be biased. In case only one pin is biased, the other pin has to be opened.