



[PAGE BACK](#) [CLOSE](#)

Product Name **Differential Mode Choke Coils**
Series **AP Series**
Type **APT22 Type**
Part Number **APT22-151M8-10-PF**

Product Lifecycle Stage PROD
 With/Without Base No

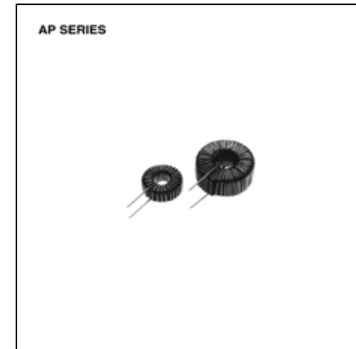

Specification

Mounting Method Flag	No	
Shape	Radial-Lead	
Body Length(L)	Max	30 m m
Body Breadth(W)	Max	19 m m
Body Height(T)	Max	30 m m
Inductance	Min	150 micro H
Test Frequency of Inductance	Nom	10 k Hz
Rated Current	Max	8 A
DC Resistance	Max	34 m Ohm
Soldering Method	Flow,Iron Soldering	
Category Temperature Range	Min	-40 Cel
	Max	120 Cel
Storage Temperature Range	Min	-40 Cel
	Max	120 Cel
Weight	Nom	32.73 g

☛ [Caution]

Specifications which provide more details for the proper and safe use of the described product are available upon request.

☛ [Notice of Revision and Improve]

All specifications are subject to change without notice.

Summary/Applications/Feature

Summary Amorphous Cores for Smoothing Choke
Applications Choke coil for switching power output smoothing circuit,Choke coil for active filter,Normal mode choke coil for EMC
Feature Excellent direct current superposition characteristics.
 The size can be more compact than no gap toroidal core.

Packaging

Packing	Bulk(Polystyrene form)	
Minimum Package Qty	Nom	220 Pcs
Minimum Order Qty	Nom	220 Pcs

[Details](#)
[PAGE TOP](#)

Copyright(c) 1996-2008 All rights reserved.