

SPECIFICATIONS

Mechanical

Contact Retention Force: 0.91Kg min.

Electrical

Current Rating: 3.0A per pin min.

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: 1000MW min

Physical

Housing: Nylon 6.6, Glass Filled, UL94V-0, Color Black

Contact: Copper Alloy

Plating: See "ORDERING INFORMATION"

Solder Pad: Copper Alloy


Operating Temperature: -55 to +105

BreakaWay Header


HB02 Series

R/A Type

2.54mm [.100"] Pitch

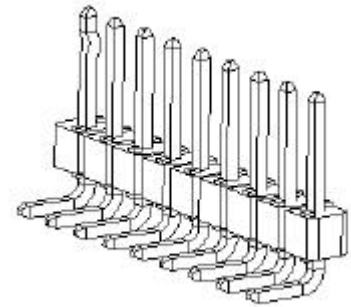

DRAWING

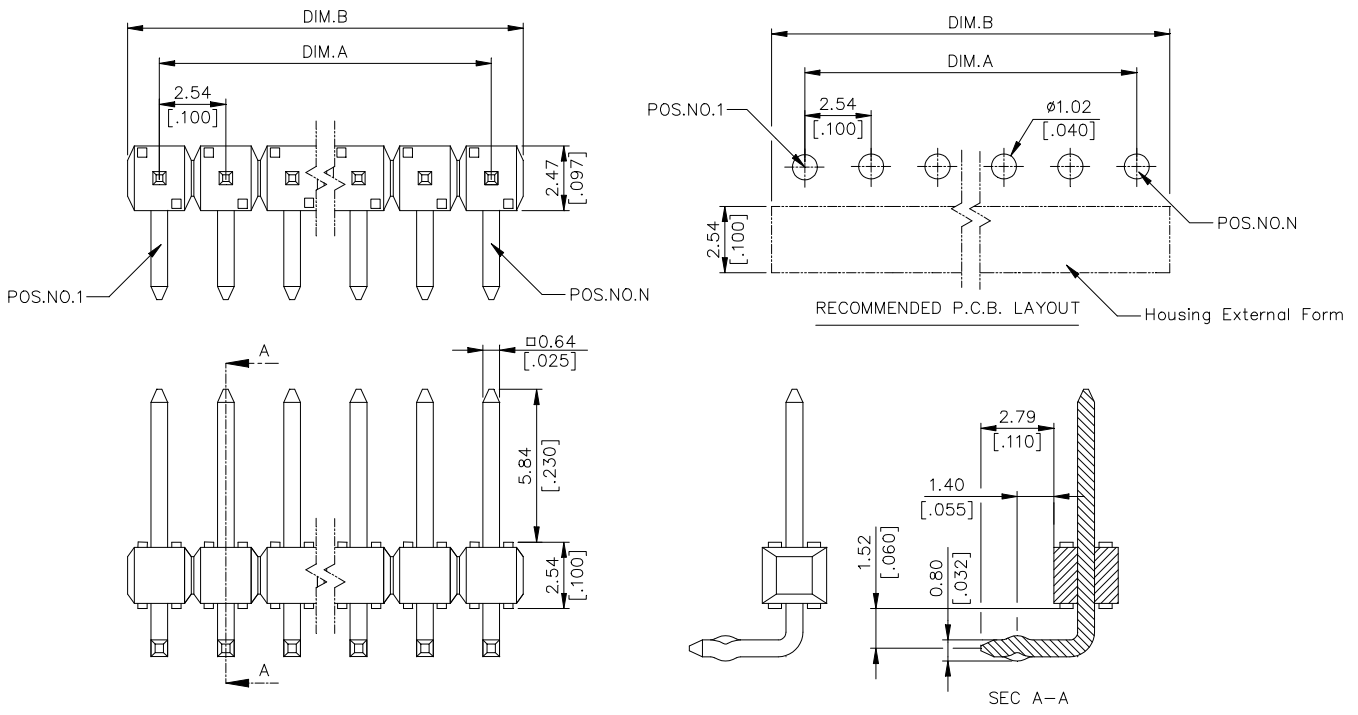

ORDERING INFORMATION

PRODUCT NO.: HB 0 2 * * * - * * * *


- Breakaway Header Series
- Termination & Contact Type
- No. Of Pos
 - 2=2 Pos
 - 4=4 Pos
- Optional For Plating
 - 0=100u" Tin/Lead
 - 1=Gold Flash
 - 7=15u" Gold
 - G=Gold Flash on Contact Area
 - C=3u" Gold on Contact Area
 - U=Gold Flash on Contact Area with Lead Free "RoHS COMPLAINE"
 - E=100u" min. Tin with Lead Free "RoHS COMPLAINE"
- Optional For Housing Color
 - See DWG. 307-0000-210
- Position Omitted
 - See DWG. 307-0000-210
- Optional For Kinks
 - See DWG. 307-0000-210

ORDERING INFORMATION

HB0220*-****	20	45.72 [1.900]	50.55 [1.990]
HB0219*-****	19	45.72 [1.800]	48.01 [1.890]
HB0218*-****	18	43.18 [1.700]	45.47 [1.790]
HB0217*-****	17	40.64 [1.600]	42.93 [1.690]
HB0216*-****	16	38.10 [1.500]	40.39 [1.590]
HB0215*-****	15	35.46 [1.400]	37.85 [1.490]
HB0214*-****	14	33.02 [1.300]	35.31 [1.390]
HB0213*-****	13	30.48 [1.200]	32.77 [1.290]
HB0212*-****	12	27.94 [1.100]	30.23 [1.190]
HB0211*-****	11	25.40 [1.000]	27.69 [1.090]
HB0210*-****	10	22.86 [.900]	25.15 [.990]
HB0209*-****	9	20.32 [.800]	22.61 [.890]
HB0208*-****	8	17.78 [.700]	20.07 [.790]
HB0207*-****	7	15.24 [.600]	17.53 [.690]
HB0206*-****	6	12.70 [.500]	14.99 [.590]
HB0205*-****	5	10.16 [.400]	12.45 [.490]
HB0204*-****	4	7.62 [.300]	9.91 [.390]
HB0203*-****	3	5.08 [.200]	7.37 [.290]
HB0202*-****	2	2.54 [.100]	4.83 [.190]
HB0201*-****	1	0.00 [0.00]	2.29 [.090]
P/N	POS.	DIM. A	DIM. B

HB0240*-****	40	99.06 [3.900]	101.35 [3.990]
HB0239*-****	39	96.52 [3.800]	98.81 [3.890]
HB0238*-****	38	93.98 [3.700]	96.27 [3.790]
HB0237*-****	37	91.44 [3.600]	93.73 [3.690]
HB0236*-****	36	88.90 [3.500]	91.19 [3.590]
HB0235*-****	35	86.36 [3.400]	88.65 [3.490]
HB0234*-****	34	83.82 [3.300]	86.11 [3.390]
HB0233*-****	33	81.28 [3.200]	83.57 [3.290]
HB0232*-****	32	78.74 [3.100]	81.03 [3.190]
HB0231*-****	31	76.20 [3.000]	25.15 [3.090]
HB0230*-****	30	73.66 [2.900]	37.85 [2.990]
HB0229*-****	29	71.12 [2.800]	35.31 [2.890]
HB0228*-****	28	68.58 [2.700]	32.77 [2.790]
HB0227*-****	27	66.04 [2.600]	30.23 [2.690]
HB0226*-****	26	63.50 [2.500]	27.69 [2.590]
HB0225*-****	25	58.42 [2.400]	63.25 [2.490]
HB0224*-****	24	55.88 [2.300]	60.71 [2.390]
HB0223*-****	23	53.34 [2.200]	58.17 [2.290]
HB0222*-****	22	50.80 [2.100]	55.63 [2.190]
HB0221*-****	21	48.26 [2.000]	53.09 [2.090]
P/N	POS.	DIM. A	DIM. B

H B NN NN N - (K) XN (W)


CODE	DESCRIPTION
K0	ALL PINS WITH KINK.
K3	SAME AS REMARK 

B8	5th & 12th & 14th & 25th PINS OMITTED.
B9	2nd & 4th & 7th PINS OMITTED.



D0	
D1	2nd & FINAL 2nd PINS OMITTED.
D2	20th POSITION OMITTED.
D3	4th & 21st POSITION OMITTED.
D4	8th POSITION OMITTED.
D5	3rd POSITION OMITTED.
D6	2nd, 4th, 6th & 10th POSITION OMITTED.
D7	4th, 8th, 12th, 16th, 20th, & 24th POSITION OMITTED.
D8	3rd,4th,6th,9th,13th & 15th POSITION OMITTED.
D9	3rd & 4th POSITION OMITTED.

P0	4th POSITION OMITTED.
P1	6th POSITION OMITTED.
P2	9th & 10th POSITION OMITTED.
P3	2nd POSITION OMITTED.
P4	5th POSITION OMITTED.
P5	10th POSITION OMITTED.
P6	2nd, 6th, 9th & 11th POSITION OMITTED.
P7	3rd, 5th, 8th POSITION OMITTED.
P8	7th POSITION OMITTED.
P9	9th POSITION OMITTED.

T0	2nd, 9th, 11th, 14th, 17th, 20th,21st & 23rd POSI. OMITTED.
T1	1st & END PINS WITH KINK, 2nd POSITION OMITTED.
T2	ALL PINS WITH KINK, 3rd & 4th POSITION OMITTED.
T3	ALL PINS WITH KINK, 5th & 6th POSITION OMITTED.
T4	2nd, 9th, 11th, 14th, 17th, 20th & 22nd POSITION OMITTED.
T5	3rd, 4th, 13rd & 14th POSITION OMITTED.
T6	2nd,3rd,5th,9th,11th,14th,17th,20th & 22nd POSITION OMITTED.
T7	3rd,4th,6th,9th,13th,15th & 16th POSITION OMITTED.
T8	2nd & 3rd POSITION OMITTED.
T9	3rd,5th,9th,13th & 15th POSITION OMITTED.

U0	4th, 8th & 12th POSITION OMITTED.
U1	3rd & 5th POSITION OMITTED
U2	3rd, 5th & 9th POSITION OMITTED
U3	3rd,4th,6th,9th & 15th POSITION OMITTED.
U4	3rd,7th,9th,11th,14th,16th,20th & 22nd POSITION OMITTED.
U5	3rd,5th,9th,13th & 16th POSITION OMITTED.
U6	2nd,9th,11th,17th,20th,22nd & 24th POSITION OMITTED.
U7	5th,7th,12th,14th,17th,19th,21st & 25th POSITION OMITTED.
U8	2nd,5th,8th & 10th POSITION OMITTED.
U9	4th & 8th POSITION OMITTED.

L0	3rd,5th,9th,13th & 15th POSITION OMITTED.
L1	5th,9th & 12th POSITION OMITTED.
L2	2nd,9th,10th,11th,12th,15th & 17 POS. OMITTED.
L3	2nd,5th & 17th POSITION OMITTED.
L4	5th,7th,11th,13th,16th,20th & 24th POS. OMITTED.
L5	4th,9th,16th & 19th POS. OMITTED.
L6	4th & 9th POSITION OMITTED.
L8	5th,7th & 15th POSITION OMITTED.
L9	12th POSITION OMITTED.

 Optional for Kinks	K =The 1st, 2nd, N&N-1, 4 Pieces of terminals are kinked.
 Optional for housing Color	None: Standard product (color black) W: color Ivory