


Surface Mount Self-Leaded Inductor

Electrical Specifications at 25°C. Operating Temp. Range: -30°C to +130°C


Part Number	L ⁽²⁾ with DC (μ H)	I _{DC} (Amps)	E-T ⁽¹⁾ Product (V- μ s)	L typ. No DC $\pm 20\%$ (μ H)	DCR Typ. (Ω)
L-515	230	1.7	139	390	.340

- 1) Rating for 15°C rise due to core loss, tested at 50 kHz.
- 2) Tested at 10 kHz - 1V and 1ADC

Schematic Diagram



Physical Dimensions inches (mm)

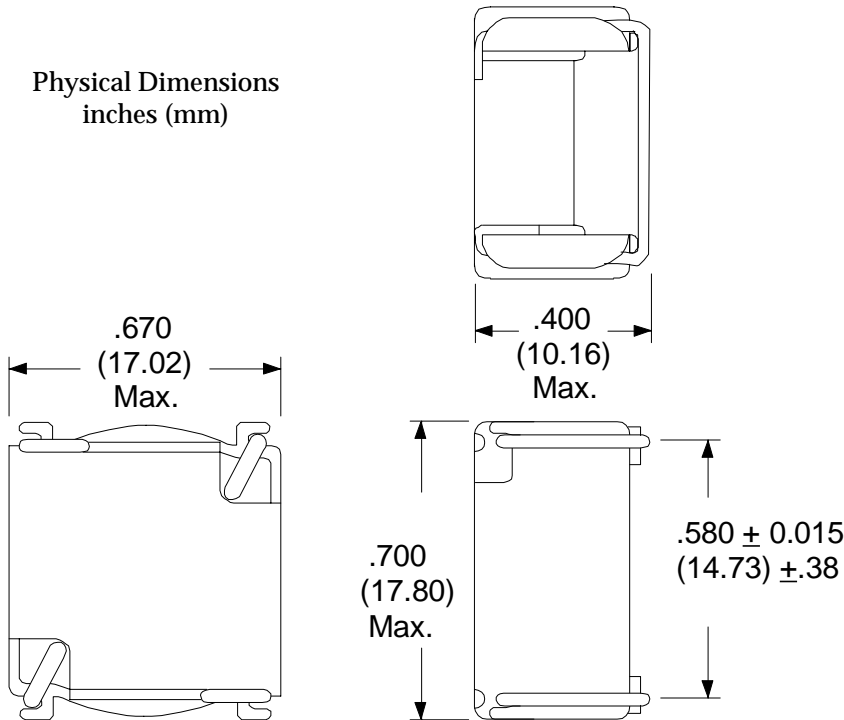

RHOMBUS P/N: L-515

CUST P/N:

NAME:

DATE: 8/09/99

SHEET: 1 OF 1