| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | NOTES |
|---|---|---|---|---|
| 1 | TLY-1P | NEMA 1-15P, polarized | 1 | black overmold |
| 2 | 30-00242 | 2C, 18 AWG, UL SPT-1, 300V, 105°C, 5.55 mm, VW-1, PVC | 1 | terminates to stripped and tinned |

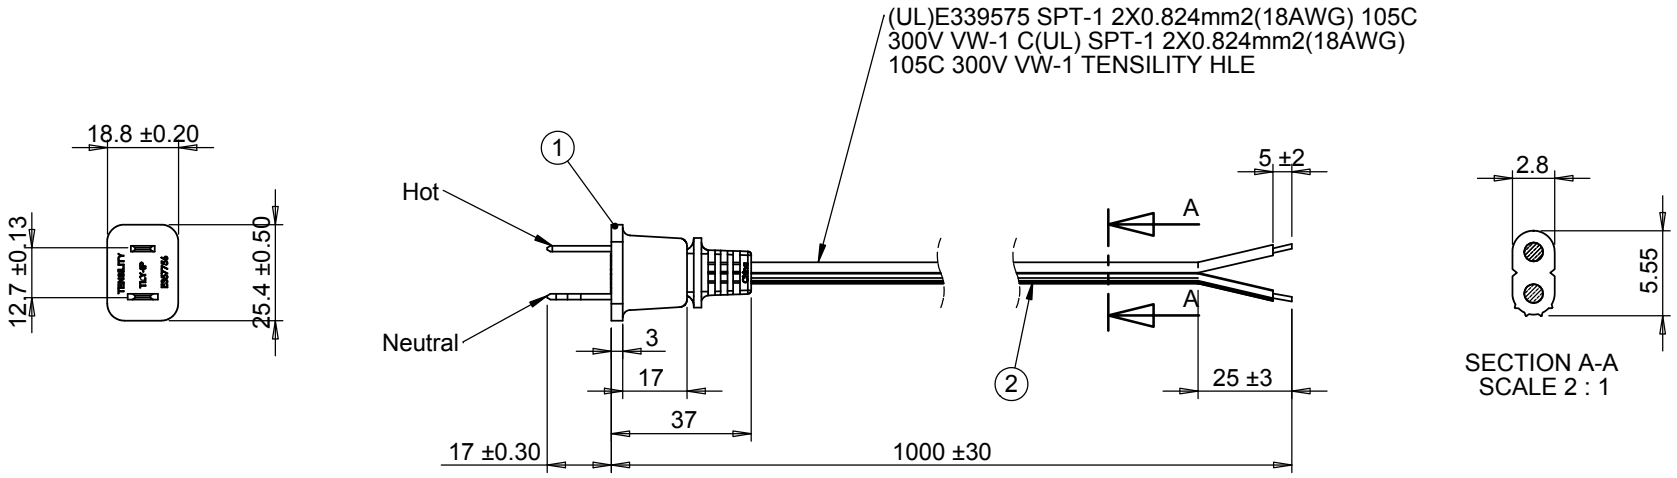


| Wiring diagram | |
|---|---|
| Contact | Wire |
| Neutral | Grooved |
| Hot | Smooth |

| Revision | Date | Description |
|---|---|---|
| A | 12/17/2012 | Initial release |
| | | |
| | | |
| | | |
| | | |

Notes

Cable rated for 10 A at 125 Vac as is.

RoHS, REACH and Dodd-Frank conflict materials compliant

Function test: no open, no reversed polarity, no short circuit, no INT


TENSILITY

**20802 Sockeye Place #130**
**Bend, OR 97701 USA**
*tel* **541.323.3228** *fax* **541.323.4202**
*800* **877.670.7118** **www.tensility.com**


DIMENSIONS ARE IN MILLIMETERS

TOLERANCES:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

DESCRIPTION:
Ac cord, 1000 mm, U.S, NEMA 1-15P plug, TLY-1P to tinned, 18 AWG, SPT-1 wire, 30-00242

SIZE A

**Part number**
**11-00018**

SCALE:1:2 | WEIGHT: | SHEET 1 OF 1

5 4 3 2 1